


# TL52055

## WIDE-BANDWIDTH, 2-INPUT, 1-OUTPUT 3-CIRCUIT VIDEO SWITCH

SCDS169A – MAY 2004 – REVISED APRIL 2005

- Functionally Similar to M52055, NJM2283, MM1231, and BA7602
- $V_{CC}$  Operating Range From 4.5 V to 9 V
- Wide Frequency Range (0 dB at 40 MHz,  $V_{CC} = 5$  V)
- Crosstalk (–75 dB at 4.43 MHz)
- BiCMOS Technology
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Performance Tested Per JESD 22
  - 2000-V Human-Body Model (A114-B, Class II)
  - 1000-V Charged-Device Model (C101)
- Applications
  - Digital TV, LCD TV, PDP TV, and CRT TV
  - VCR, Projector, and DVD Player

D OR PW PACKAGE  
(TOP VIEW)

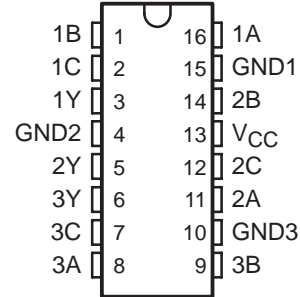

### description/ordering information

The TL52055 is a wide-bandwidth, 2-input, 1-output, 3-circuit video switch. All inputs are bias types. The select (1C, 2C, 3C) inputs control the signal path of A port and B port. The device can be used for switching separate video signals and component-video signals and is suitable for DTV, LCD, PDP, and other high-quality AV systems. The device provides no loss (0 dB) up to 40 MHz and has a very low crosstalk.

### ORDERING INFORMATION

$T_A$	PACKAGE†		ORDERABLE PART NUMBER	TOP-SIDE MARKING
–40°C to 85°C	SOIC – D	Tube	TL52055D	TL52055
		Tape and reel	TL52055DR	
	TSSOP – PW	Tape and reel	TL52055PWR	ZA055

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).

### FUNCTION TABLE

INPUT C	ON CHANNEL
L	A port to Y port
H	B port to Y port
OPEN	A port to Y port



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

UNLESS OTHERWISE NOTED this document contains PRODUCTION DATA information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2005, Texas Instruments Incorporated

TL52055  
WIDE-BANDWIDTH, 2-INPUT, 1-OUTPUT  
3-CIRCUIT VIDEO SWITCH

SCDS169A – MAY 2004 – REVISED APRIL 2005

block diagram

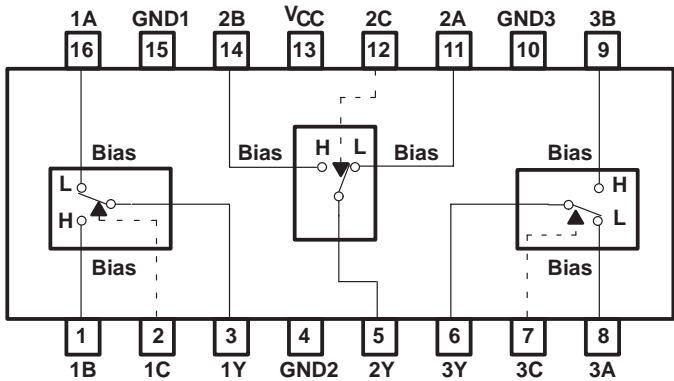

absolute maximum ratings over operating free-air temperature (unless otherwise noted)†

- Supply voltage range,  $V_{CC}$  ..... –0.3 V to 12 V  
Package thermal impedance,  $\theta_{JA}$  (see Note 1): D package ..... 73°C/W  
PW package ..... 108°C/W  
Storage temperature range,  $T_{stg}$  ..... –65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The package thermal impedance is calculated in accordance with JESD 51-7.

recommended operating conditions

		MIN	MAX	UNIT
$V_{CC}$	Supply voltage	4.5	9	V
$T_A$	Operating free-air temperature	–40	85	°C

**TL52055**  
**WIDE-BANDWIDTH, 2-INPUT, 1-OUTPUT**  
**3-CIRCUIT VIDEO SWITCH**

SCDS169A – MAY 2004 – REVISED APRIL 2005

**electrical characteristics  $V_{CC} = 5\text{ V}/9\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (see Note 2)**

PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
$I_{CC1}$ Operating current 1	$V_{CC} = 9\text{ V}$ , No signal		10.3	14	mA
$I_{CC2}$ Operating current 2	$V_{CC} = 5\text{ V}$ , No signal		9.4	12	mA
$f_t$ Frequency bandwidth	$V_{CC} = 5\text{ V}$ , $V_{IN} = 1\text{ V}_{P-P}$		40		MHz
$G_V$ Voltage gain	$F_{IN} = 1, 10\text{ MHz}$ , $V_{IN} = 1\text{ V}_{P-P}$	-0.6	-0.1	0.4	dB
$G_F^\ddagger$ Flatness of voltage gain	$F_{IN} = 30\text{ MHz}/1\text{ MHz}$ , $V_{IN} = 1\text{ V}_{P-P}$		0		dB
$CT_{SW}^\S$ Switch crosstalk	$F_{IN} = 4.43\text{ MHz}$ , $V_{IN} = 1\text{ V}_{P-P}$	-75		-60	dB
$CT_{CH}^\P$ Channel crosstalk	$F_{IN} = 4.43\text{ MHz}$ , $V_{IN} = 1\text{ V}_{P-P}$	-75		-60	dB
$D_G$ Differential gain	$V_{IN} = 1\text{ V}_{P-P}$ , 10-step video signal		0.3		%
$D_P$ Differential phase	$V_{IN} = 1\text{ V}_{P-P}$ , 10-step video signal		0.3		deg
$V_{OS}$ Output offset voltage		-10	0	10	mV
$Z_I$ Input impedance			20		k $\Omega$
$V_{IH}$ High-level control input voltage (C inputs)	$V_{CC} = 5\text{ V}$ and $9\text{ V}$	2		$V_{CC}$	V
$V_{IL}$ Low-level control input voltage (C inputs)	$V_{CC} = 5\text{ V}$ and $9\text{ V}$	0		0.8	V

<sup>†</sup> Frequency bandwidth is defined as the maximum frequency, with 0-dB gain.

<sup>‡</sup>  $G_F$  is the difference of  $G_V$  at 30 MHz and at 1 MHz.

<sup>§</sup> Switch crosstalk is defined as the crosstalk from an ON-channel to an OFF-channel (xA to xB).

<sup>¶</sup> Channel crosstalk is defined as the crosstalk between two ON-channels (1Y to 2Y, 2Y to 3Y).

NOTE 2: All unused inputs of the device must be open or connected to GND through a capacitor to ensure proper device operation.

**TL52055**  
**WIDE-BANDWIDTH, 2-INPUT, 1-OUTPUT**  
**3-CIRCUIT VIDEO SWITCH**

SCDS169A – MAY 2004 – REVISED APRIL 2005


equivalent circuit,  $V_{CC} = 5\text{ V}$  (9 V)<sup>†</sup>

PIN NO.	PIN NAME	INSIDE EQUIVALENT CIRCUIT	VOLTAGE	NOTE
16 1 11 14 8 9	1A 1B 2A 2B 3A 3B		2.9 V (5.2 V) <sup>†</sup>	Input
3 5 6	1Y 2Y 3Y		2.1 V (4.4 V) <sup>†</sup>	Output
2 12 7	1C 2C 3C			Control
13	$V_{CC}$			
15 4 10	GND1 GND2 GND3			

<sup>†</sup> Voltages in parentheses are associated with  $V_{CC} = 9\text{ V}$ .

<sup>‡</sup>  $V_{BIAS}$  is an internal voltage source.

### PARAMETER MEASUREMENT INFORMATION

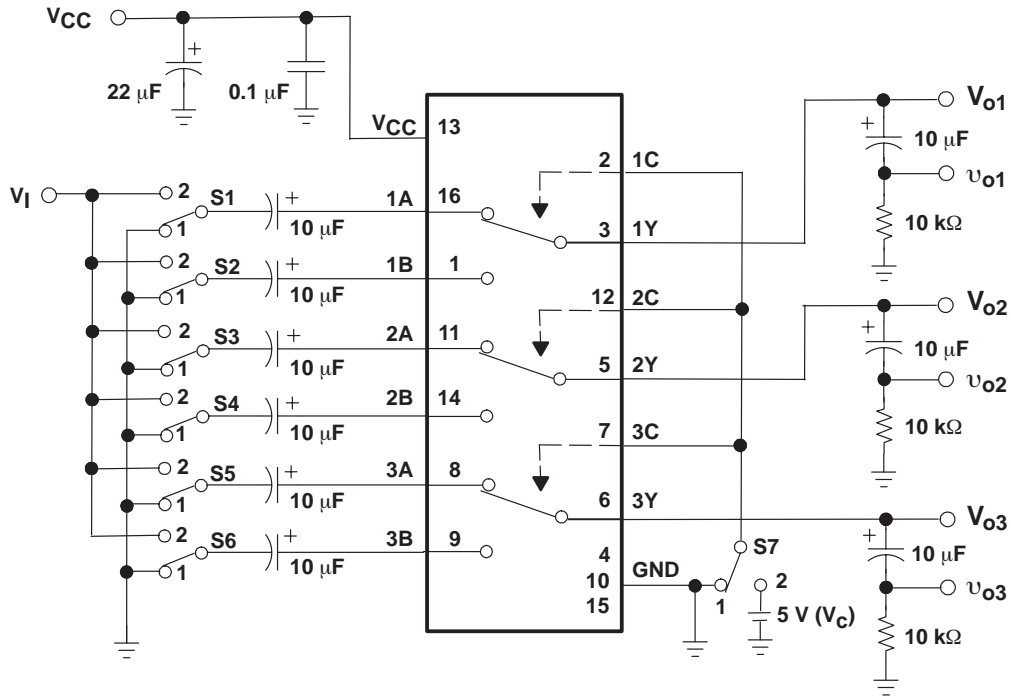


SYMBOL	S1	S2	S3	S4	S5	S6	S7	MEASUREMENT POINT
I <sub>CC1</sub>	1	1	1	1	1	1	1	V <sub>CC</sub>
I <sub>CC2</sub>	1	1	1	1	1	1	1	
G <sub>F</sub>	2	1	1	1	1	1	1	
G <sub>V</sub>	2	1	1	1	1	1	1	v <sub>01</sub> , v <sub>02</sub> , v <sub>03</sub>
D <sub>G</sub> /D <sub>P</sub>	2	1	1	1	1	1	1	
CT <sub>SW1</sub>	2	1	1	1	1	1	2	
CT <sub>SW2</sub>	1	2	1	1	1	1	1	v <sub>01</sub>
CT <sub>SW3</sub>	1	1	2	1	1	1	2	v <sub>02</sub>
CT <sub>SW4</sub>	1	1	1	2	1	1	1	
CT <sub>SW5</sub>	1	1	1	1	2	1	2	v <sub>03</sub>
CT <sub>SW6</sub>	1	1	1	1	1	2	1	
CT <sub>CH1</sub>	2	1	1	1	1	1	1	v <sub>02</sub> , v <sub>03</sub>
	1	2	1	1	1	1	2	
CT <sub>CH2</sub>	1	1	2	1	1	1	1	v <sub>01</sub> , v <sub>03</sub>
	1	1	1	2	1	1	2	
CT <sub>CH3</sub>	1	1	1	1	2	1	1	v <sub>01</sub> , v <sub>02</sub>
	1	1	1	1	1	2	2	
V <sub>OS</sub>	1	1	1	1	1	1	1/2	V <sub>01</sub> , V <sub>02</sub> , V <sub>03</sub>
V <sub>IH</sub> /V <sub>IL</sub>	1/2	1/2	1	1	1	1	V <sub>C</sub>	V <sub>C</sub>

Figure 1. Load Circuit and Test Conditions


**TL52055**  
**WIDE-BANDWIDTH, 2-INPUT, 1-OUTPUT**  
**3-CIRCUIT VIDEO SWITCH**

SCDS169A – MAY 2004 – REVISED APRIL 2005


**TYPICAL CHARACTERISTICS**

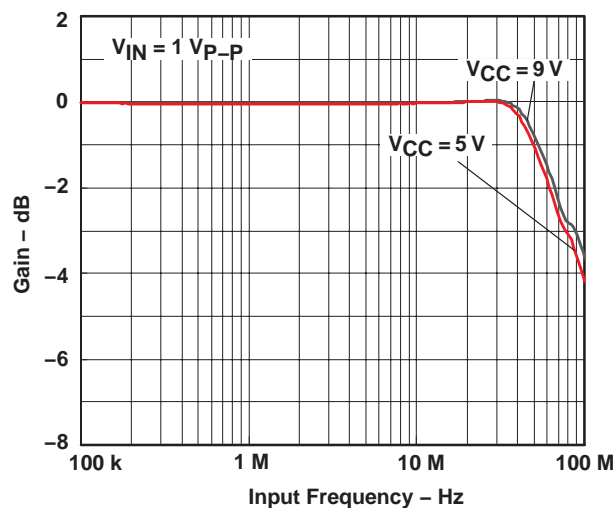

**Figure 2. Gain vs Frequency**

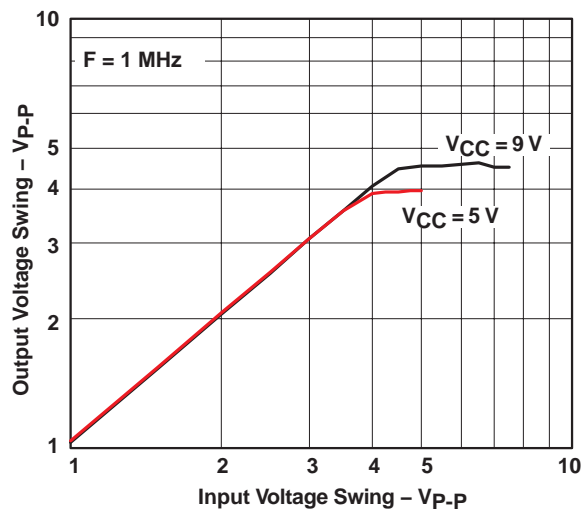


**Figure 3. Output Voltage Swing vs Input Voltage Swing**

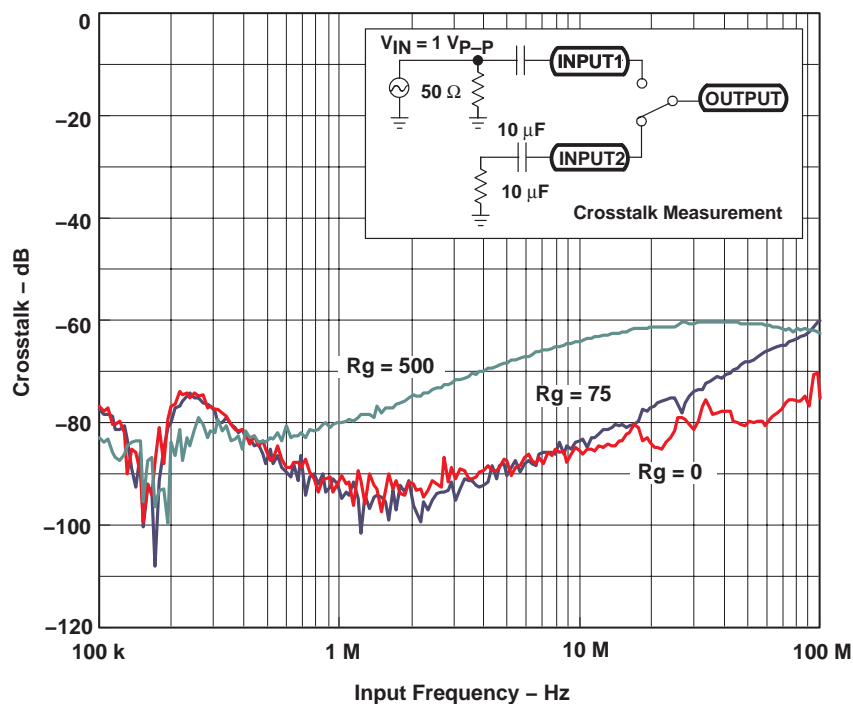

**Figure 4. Crosstalk vs Frequency**

## APPLICATION INFORMATION

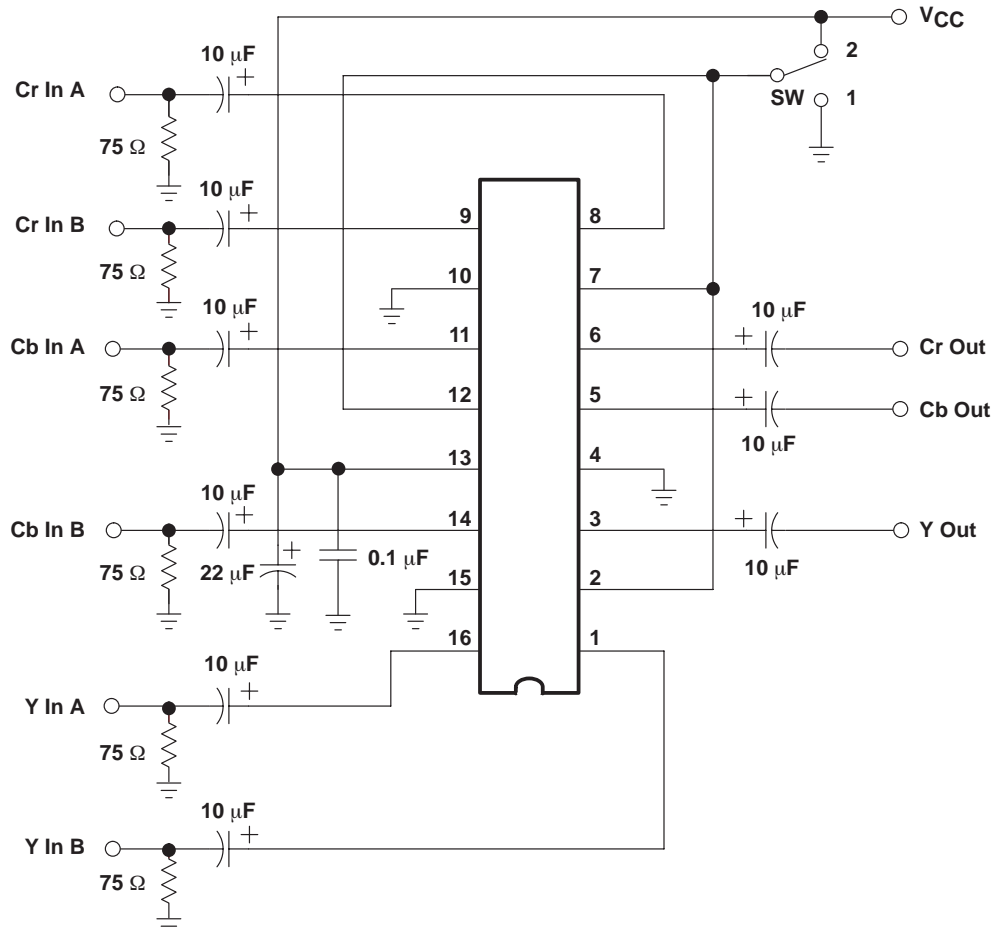

**Figure 5. Application of TL52055**

Figure 5 shows a typical application of the TL52055 in component-video signaling. Typically, the peak-to-peak amplitude of a component-video signal is less than 1 V. If the frequency of operation is less than 40 MHz, the switch does not cause any loss of signal. Also, due to low crosstalk, there is no degradation of the video switch.

## USAGE NOTES

1. When using this device, the output drive current should be 5 mA or less.
2. Voltage applied to the control pins (2, 7, and 12) should be less than the power supply voltage ( $V_{CC}$ ) and greater than the ground voltage (GND).
3. The types of output pins for this device are emitter follower. The drive current list below is applied inside the device. If the drive performance is insufficient, apply external drive current within the range in step 1.

Power-Supply Voltage ( $V_{CC}$ )	Drive Current in the Device (standard value)
5 V	1 mA
9 V	1 mA

## PACKAGING INFORMATION

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
TL52055DR	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TL52055DRE4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TL52055DRG4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TL52055PWR	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TL52055PWRE4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TL52055PWRG4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

D (R-PDSO-G16)

PLASTIC SMALL-OUTLINE PACKAGE

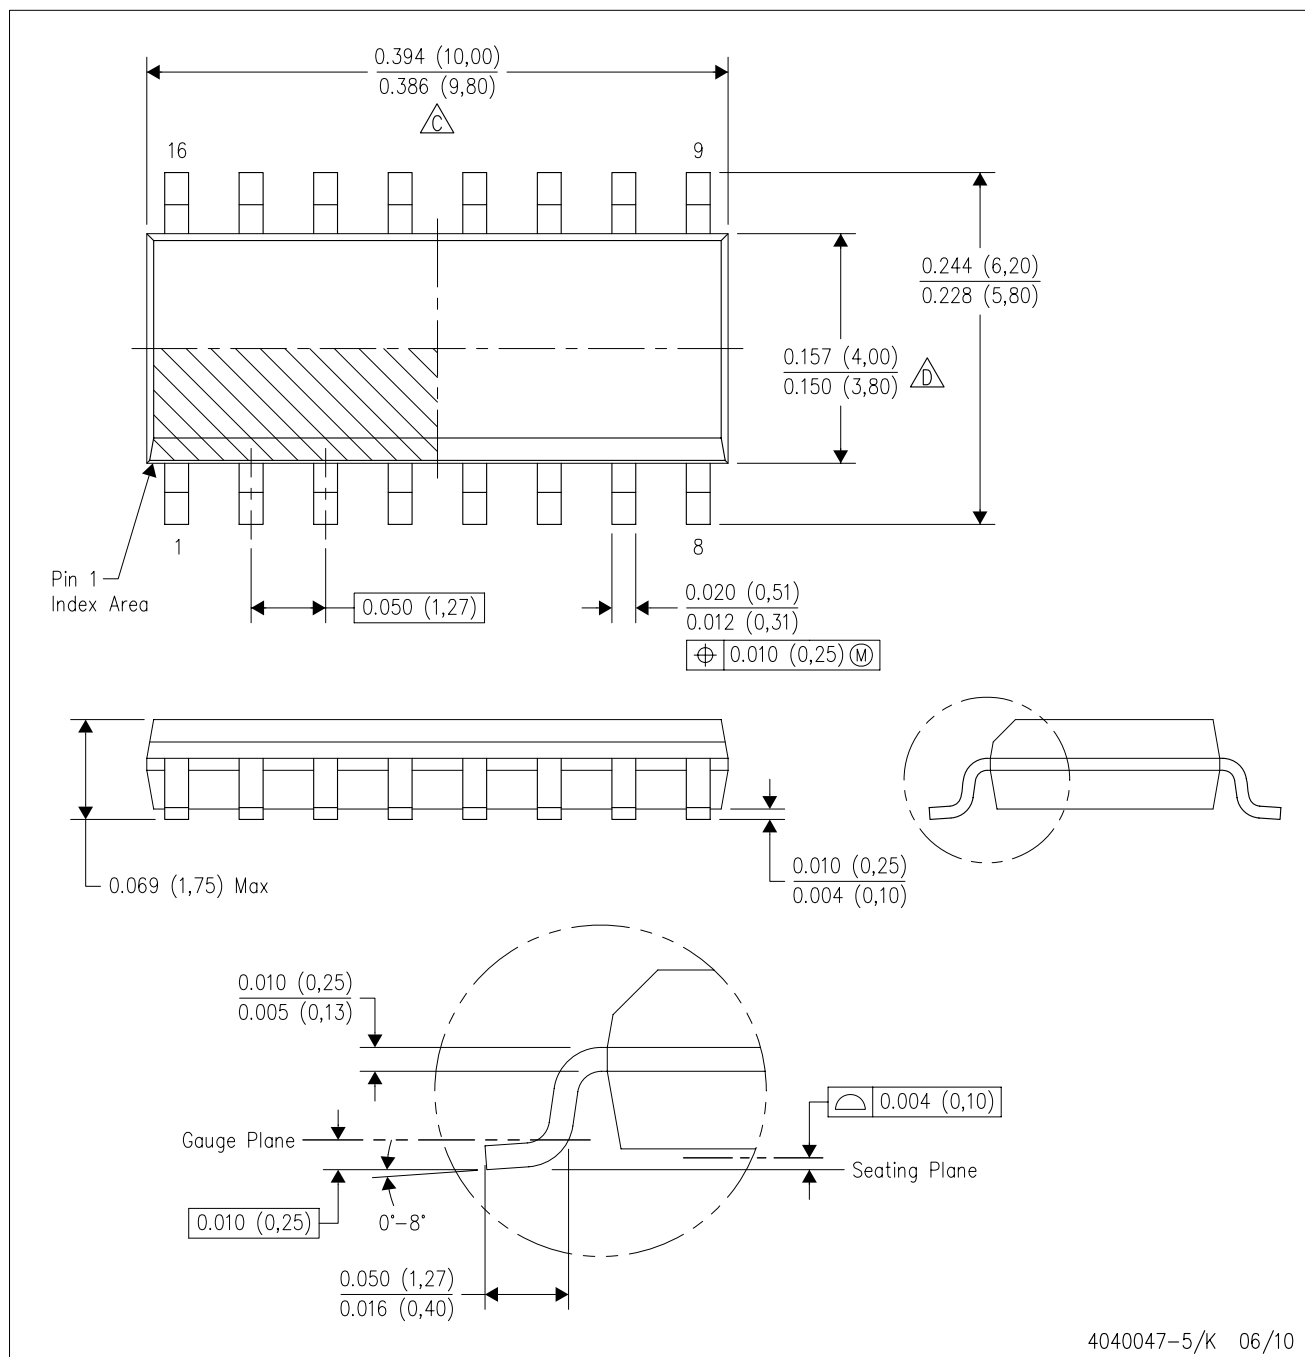


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.
  - E. Reference JEDEC MS-012 variation AC.

## PW (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE PACKAGE

14 PINS SHOWN

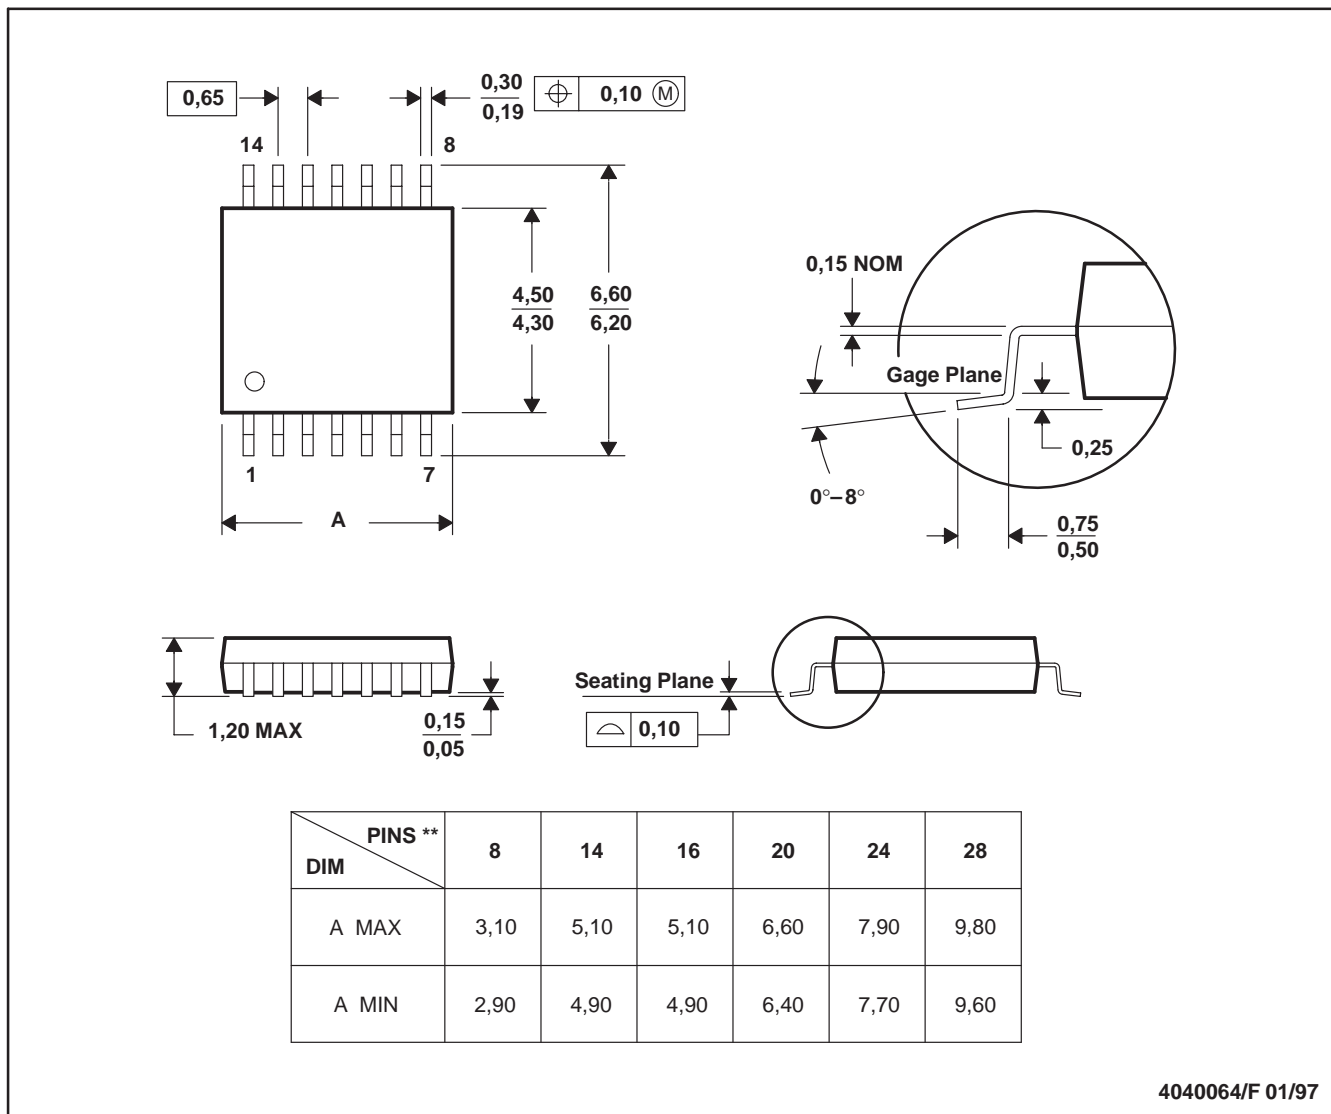

- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.  
 D. Falls within JEDEC MO-153

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>	Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>	Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>	Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>	Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>	Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>	Energy	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>	Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>	Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>	Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>	Space, Avionics & Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
RF/IF and ZigBee® Solutions	<a href="http://www.ti.com/lprf">www.ti.com/lprf</a>	Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
		Wireless	<a href="http://www.ti.com/wireless-apps">www.ti.com/wireless-apps</a>