

ISOLATED DC/DC CONVERTERS

48 Vdc Input 3.3 Vdc /12 A Output


bel
POWER PRODUCTS

VRYB-40T03x

RoHS Compliant

Rev.A

- Isolated
- High Efficiency
- High Power Density
- Fixed Frequency (400 kHz)
- Low Cost
- Input Under-Voltage Lockout
- Output Over-Voltage Shutdown
- OCP/SCP
- Over Temperature Protection
- Remote On/Off
- Output Voltage Trim
- Positive/Negative Remote Sense

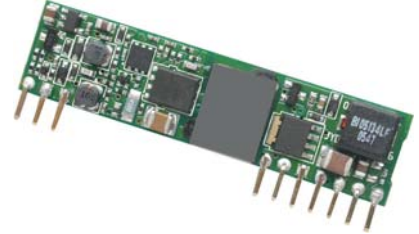

Description

The VRYB-40T03x is isolated dc/dc converter that operates from a nominal 48 Vdc source. This unit will provide up to 40 W of output power from a nominal 48 Vdc input. This unit is designed to be highly efficient and low cost. Features include remote on/off, over current protection and under-voltage lockout. This converter is provided in an industry SIP package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
3.3 Vdc	36 Vdc - 75 Vdc	12 A	40 W	89%	VRYB-40T033	VRYB-40T03L

Notes: 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.

2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	80 V	
Remote On/Off	-0.3 V	-	18 V	
I/O Isolation Voltage	-	-	1500 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	36 V	48 V	75 V	
Input Current (full load)	-	-	1.5 A	
Input Current (no load)	-	40 mA	60 mA	
Remote Off Input Current	-	8 mA	15 mA	
Input Reflected Ripple Current (rms)	-	4 mA	8 mA	Tested with simulated source impedance of 10 uH, 5 Hz to 20 MHz; use a 100 uF/100 V electrolytic capacitor with ESR = 1 ohm max. at 200 kHz at 25 °C.
Input Reflected Ripple Current (pk-pk)	-	25 mA	50 mA	
I ² t Inrush Current Transient	-	0.01 A ² s	0.02 A ² s	
Turn-on Voltage Threshold	32 V	34 V	35 V	
Turn-off Voltage Threshold	30 V	32 V	33 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

ISOLATED DC/DC CONVERTERS

48 Vdc Input 3.3 Vdc /12 A Output



Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	3.250 V	3.300 V	3.350 V	Vin=48 V, Io=50%Load
Output Voltage Regulation (Load)	-	± 6 mV	± 12 mV	
Output Voltage Regulation (Line)	-	± 2 mV	± 5 mV	
Regulation Over Temperature (-40 deg.C - 85 deg.C)	-	± 20 mV	± 40 mV	
Output Current	0 A	-	12 A	
Current Limit Threshold	14 A	18 A	21 A	
Ripple and Noise (pk-pk)	-	40 mV	80 mV	0-20 MHz BW, with a 1 uF ceramic capacitor and a 220 uF tantalum capacitor at the output.
Ripple and Noise (rms)	-	7 mV	15 mV	
Short Circuit Surge Transient	-	3 A ² s	5 A ² s	
Turn on Time	-	-	40 mS	
Overshoot at Turn On	-	0%	5%	
Output Capacitance	220 uF	-	10000 uF	
Transient Response				
25% - 50% Max Load	Vo=3.3 V		120 mV	di/dt=0.1 A/us, Vin=48 Vdc, Ta=25°C, with a 1 uF ceramic capacitor and a 220 uF Tantalum capacitor at the output.
Settling Time			100 uS	
50% - 25% Max Load		-	120 mV	
Settling Time		-	100 uS	

Note: All specifications are typical at 25 °C unless otherwise stated.

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency	86%	89%	-	Vin=48 V, full load
Switching Frequency	360 kHz	400 kHz	440 kHz	
Isolation capacitance	-	1000 pF	-	
Output Voltage Trim Range	-	80%	110%	
Remote Sense Compensation	-	-	10%	The total voltage increased by trim and remote sense should not exceed 10%Vo.
Over Temperature Protection	-	125 °C	-	
Over Voltage Protection	115%	140%	-	
MTBF	TBD			Calculated Per Bell Core SR-332 (Vin=48 V, Vo=3.3 V, Io=9.6 A, Ta = 25 °C)
Dimensions Inches (L × W × H) Millimeters (L × W × H)	2.0 x 0.5 x 0.348 50.80 x 12.70 x 8.84			
Weight	-	10.5 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

ISOLATED DC/DC CONVERTERS

48 Vdc Input 3.3 Vdc /12 A Output




Control Specifications

Parameter		Min	Typ	Max	Notes
Remote On/Off					
Signal Low (Unit On)	Active Low	-0.3 V	-	0.8 V	VRYB-40T03L. The remote on/off pin open, Unit off.
Signal High (Unit Off)		2.4 V	-	18 V	
Signal Low (Unit Off)	Active High	-0.3 V	-	0.8 V	VRYB-40T033. The remote on/off pin open, Unit on.
Signal High (Unit On)		2.4 V	-	18 V	
Current Sink		0 mA	-	0.75 mA	


Output Trim Equations

Equations for calculating the trim resistor are shown below. The Trim Down resistor should be connected between the Trim pin and GND pin. The Trim Up resistor should be connected between the Trim pin and the Vout pin. Only one of the resistors should be used for any given application.

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22 [k\Omega]$$

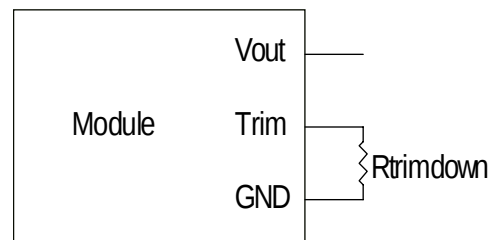

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 626}{1.225 \cdot \delta} - 10.22 [k\Omega]$$

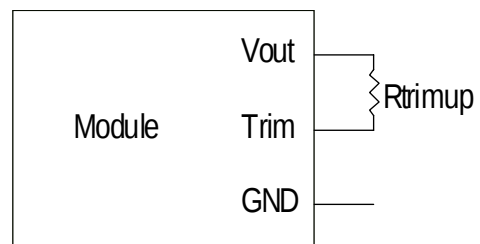

Note:

$$\delta = \frac{(V_{o_req} - V_o)}{V_o} \times 100 [\%]$$

V_{o_req} = Desired (trimmed) output voltage [V]
Output voltage V_o = 3.308 V


ISOLATED DC/DC CONVERTERS

48 Vdc Input


3.3 Vdc /12 A Output

bel
POWER PRODUCTS

Efficiency Data

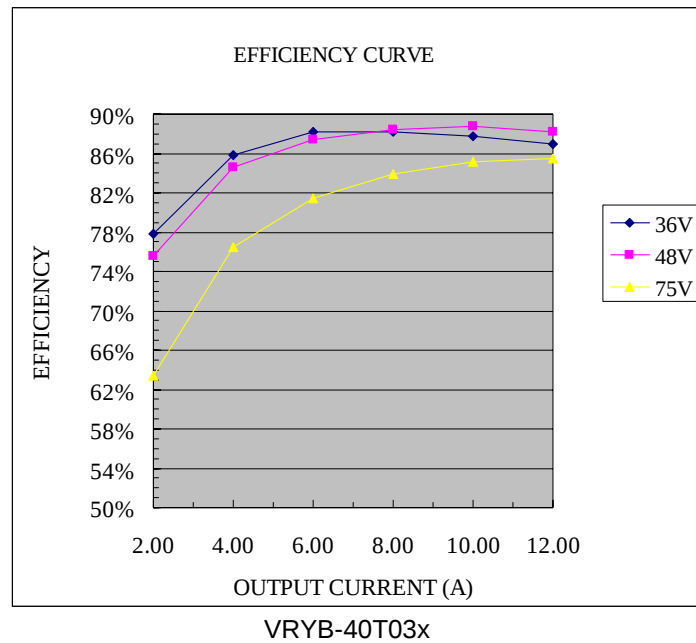

Thermal Derating Curve

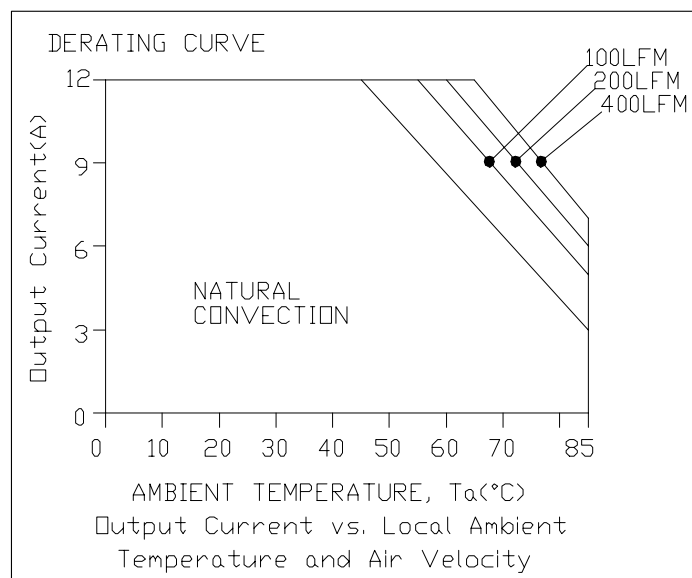


ISOLATED DC/DC CONVERTERS

48 Vdc Input


3.3 Vdc /12 A Output

bel
POWER PRODUCTS

Transient Response Waveforms

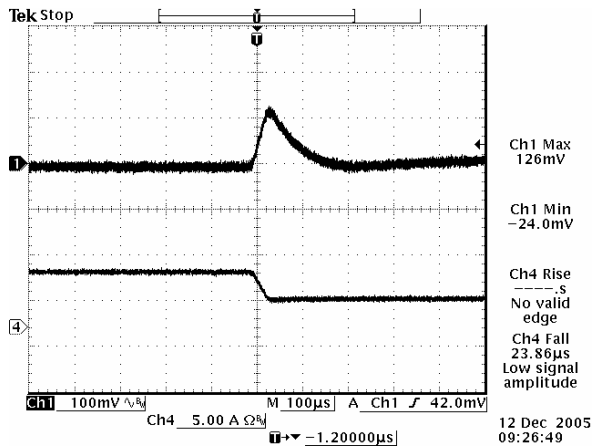


Vout=3.3 V 50% to 25% Load Transients

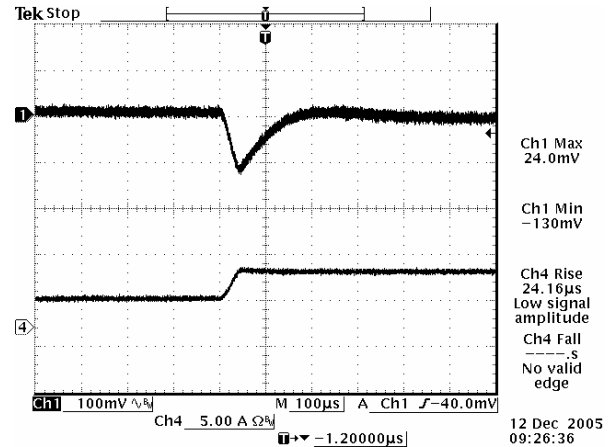

Vout=3.3 V 25% to 50% Load Transients

Note: Transient Response at Vin=48 V, di/dt=0.1 A/uS, with external 220 uF tantalum capacitor and 1 uF ceramic capacitor at the output, Ta=25 deg C.

Ripple and Noise Waveform

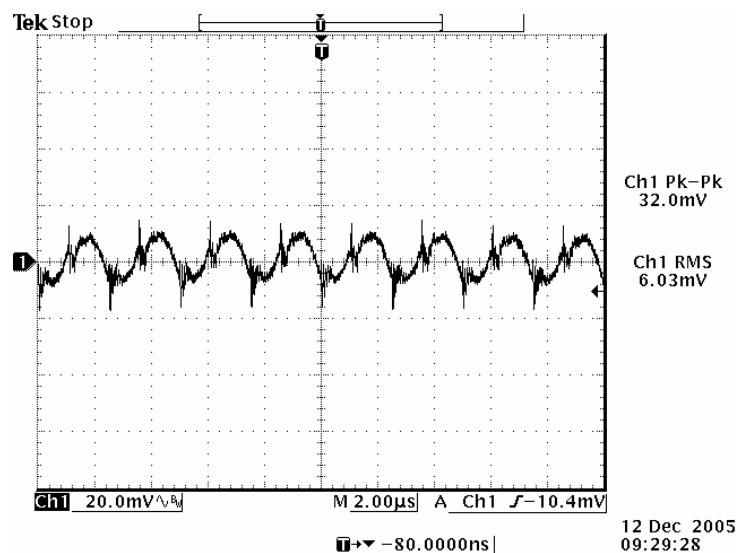

Note: Ripple and noise at full load, 48 Vdc input, 3.3 Vdc/12 A output and Ta=25 deg C, and with a 1uF ceramic capacitor and a 220 uF tantalum capacitor at the output.



ISOLATED DC/DC CONVERTERS

48 Vdc Input

3.3 Vdc /12 A Output

bel
POWER PRODUCTS

Mechanical Outline

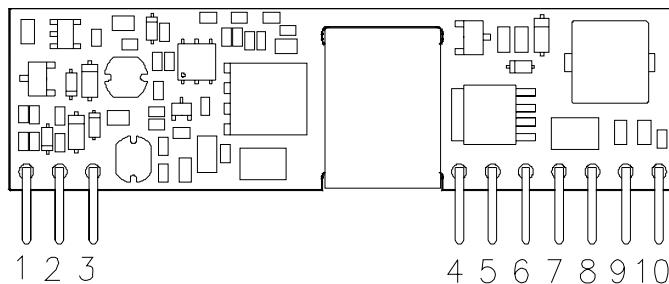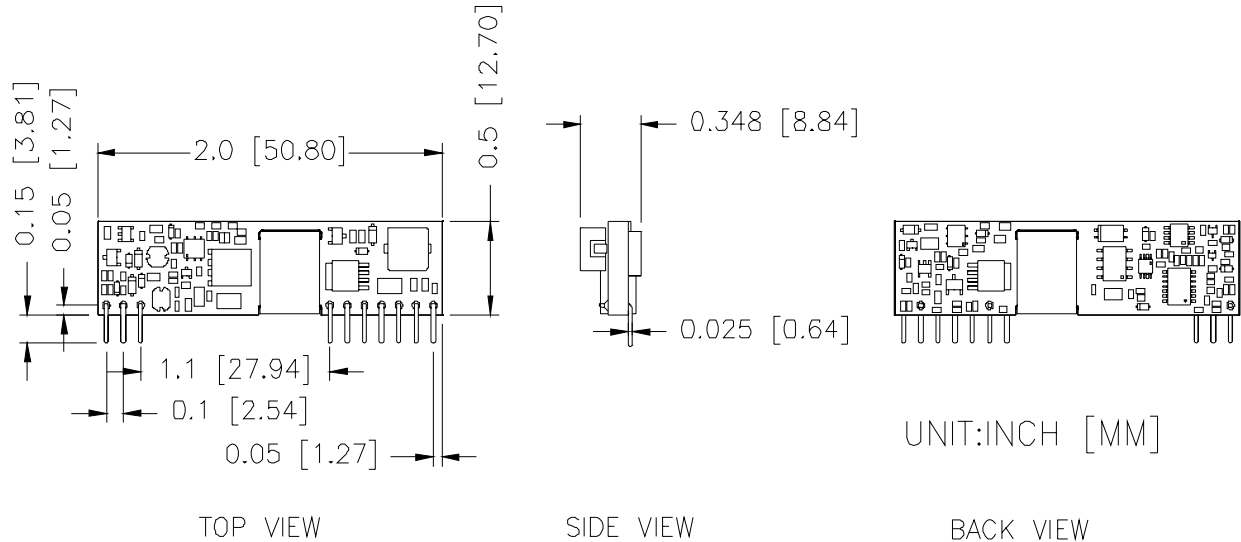

Pin Connections

Pin	Function
1	Vin(+)
2	On/Off
3	Vin(-)
4	Sense(-)
5	Vout(-)
6	Vout(-)
7	Trim
8	Vout(+)
9	Vout(+)
10	Sense(+)

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 081007

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com