


1.8V Operate PWM control Step-Up / Flyback switching regulator IC

■GENERAL DESCRIPTION

NJU7677 is a high speed low voltage operation switching regulator control IC. It features a totem pole driver that can directly drive an external MOS-FET.

Internal soft-start function, dead time control and timer latch function are included, requiring no external components. All parameters can be optimized by additional external components for design flexibility.

■PACKAGE OUTLINE




NJU7677RB1


■FEATURES

- PWM switching control
- Operating Voltage 1.8V to 7V
- Wide Oscillator Range 300kHz to 1MHz
- Maximum Duty Cycle 90% typ.
- Quiescent Current 600 μ A typ.
- Soft-Start Function Internal : 4ms typ. or adjustable
- Dead Time Control
- Timer Latch for Short Circuit Protection
- C-MOS Technology
- Package Outline NJU7677RB1 : TVSP8

■PIN CONFIGURATION

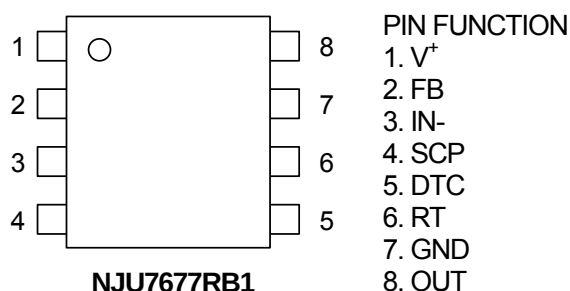

■BLOCK DIAGRAM

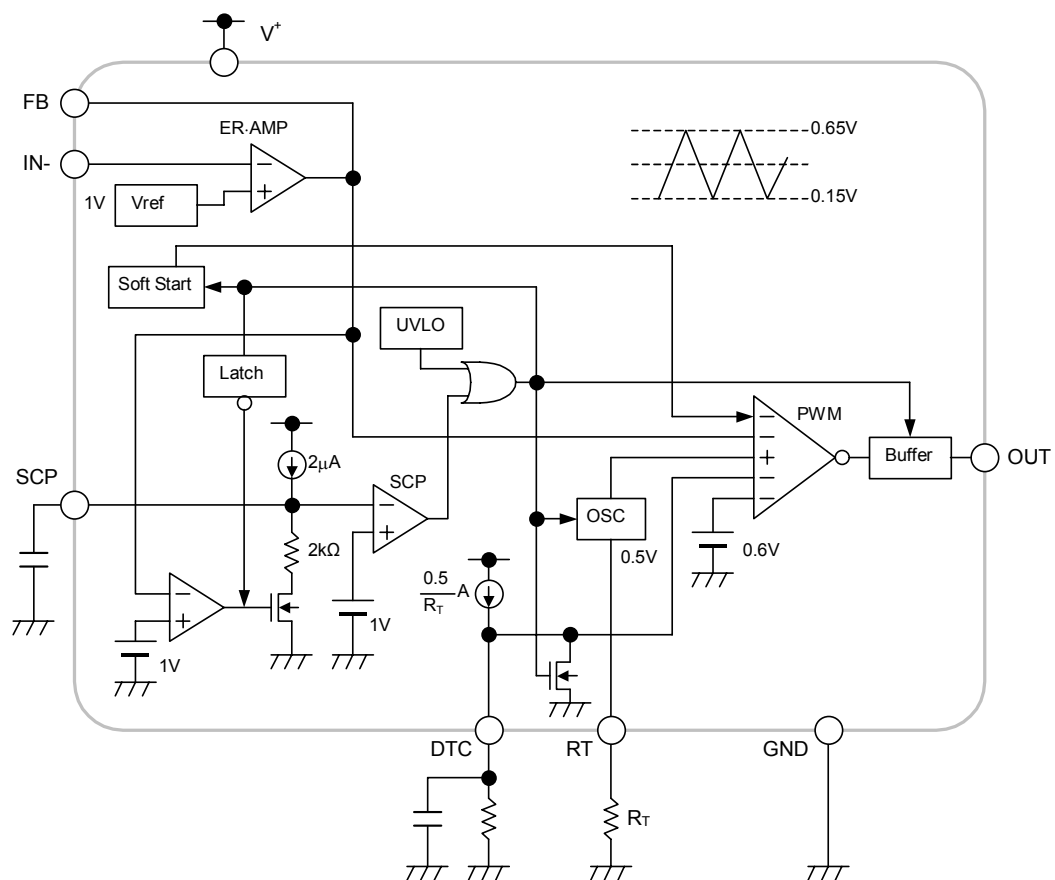

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	MAXIMUM RATINGS	UNIT
Supply Voltage	V ⁺	+8	V
Output Pin Current	I _O	±50	mA
Power Dissipation	P _D	320	mW
Operating Temperature Range	T _{OPR}	-40 ~ +85	°C
Storage Temperature Range	T _{STG}	-40 ~ +125	°C

■RECOMMENDED OPERATING CONDITIONS (Ta=25°C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V ⁺	1.8	—	7	V
Oscillator Timing Resistor	R _T	30	47	120	kΩ
Oscillation Frequency	f _{OSC}	300	700	1,000	kHz

■ELECTRICAL CHARACTERISTICS (V⁺=3.3V, R_T=47kΩ, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
-----------	--------	----------------	------	------	------	------

Under Voltage Lockout Block

ON Threshold Voltage	V _{T_ON}	V ⁺ = L → H	1.6	1.7	1.8	V
OFF Threshold Voltage	V _{T_OFF}	V ⁺ = H → L	1.5	1.6	1.7	V
Hysteresis Voltage	V _{HYS}		60	100	—	mV

Soft Start Block

Soft Start Time	T _{SS}	V _{T_ON} → Duty=80%	2	4	8	ms
-----------------	-----------------	------------------------------	---	---	---	----

Short Circuit Protection Block

Input Threshold Voltage	V _{T_PC}	FB Pin	0.95	1.00	1.05	V
Charge Current	I _{CHG}	V _{SCP} =0V	1.5	2	2.5	μA
Latch Mode ON Threshold Voltage	V _{T_LA}	SCP Pin	0.90	1.00	1.10	V
Latch Mode OFF Threshold Voltage	V _{T_LAOFF}	SCP Pin	0.35	0.6	0.85	V

Oscillator Block

RT Pin Voltage	V _{RT}		-8%	0.5	+8%	V
Oscillation Frequency	f _{OSC}		630	700	770	kHz
Oscillate Supply Voltage Fluctuations	f _{DV}	V ⁺ =1.8V ~ 7V	—	1	—	%
Oscillate Temperature Fluctuations	f _{DT}	Ta=-40°C ~ +85°C	—	3	—	%

■ELECTRICAL CHARACTERISTICS ($V^+=3.3V$, $R_T=47k\Omega$, $T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
-----------	--------	----------------	------	------	------	------

Error Amplifier Block

Reference Voltage	V_B		-1.0%	1.00	+1.0%	V
Input Bias Current	I_B		-0.1	—	0.1	μA
Open Loop Gain	A_V		—	80	—	dB
Gain Bandwidth Product	G_B		—	1	—	MHz
Output Source Current	I_{OM+}	$V_{FB}=1V$, $V_{IN-}=0.9V$	20	35	50	μA
Output Sink Current	I_{OM-}	$V_{FB}=1V$, $V_{IN-}=1.1V$	1.0	4.0	12	mA

PWM Compare Block

Input Threshold Voltage	V_{T_0}	Duty=0%	0.10	0.16	0.22	V
	V_{T_50}	Duty=50%	0.36	0.42	0.48	V
Maximum Duty Cycle	$M_{AX}D_{UTY_1}$	$V_{FB}=0.9V$	85	90	95	%
	$M_{AX}D_{UTY_2}$	$V_{FB}=0.9V$, $R_{DTC}=43k\Omega$	45	55	65	%

Output Block


Output High Level ON Resistance	R_{OH}	$I_O=-20mA$	—	6	12	Ω
	$R_{OH_1.8}$	$I_O=-20mA$, $V^+=1.8V$	—	10	20	Ω
Output Low Level ON Resistance	R_{OL}	$I_O=+20mA$	—	4.5	9	Ω
	$R_{OL_1.8}$	$I_O=+20mA$, $V^+=1.8V$	—	8	16	Ω

General Characteristics


Quiescent Current	I_{DD}	$R_L=Non\ Load$	—	600	900	μA
-------------------	----------	-----------------	---	-----	-----	---------

■ TYPICAL APPLICATIONS

Step-Up Converter

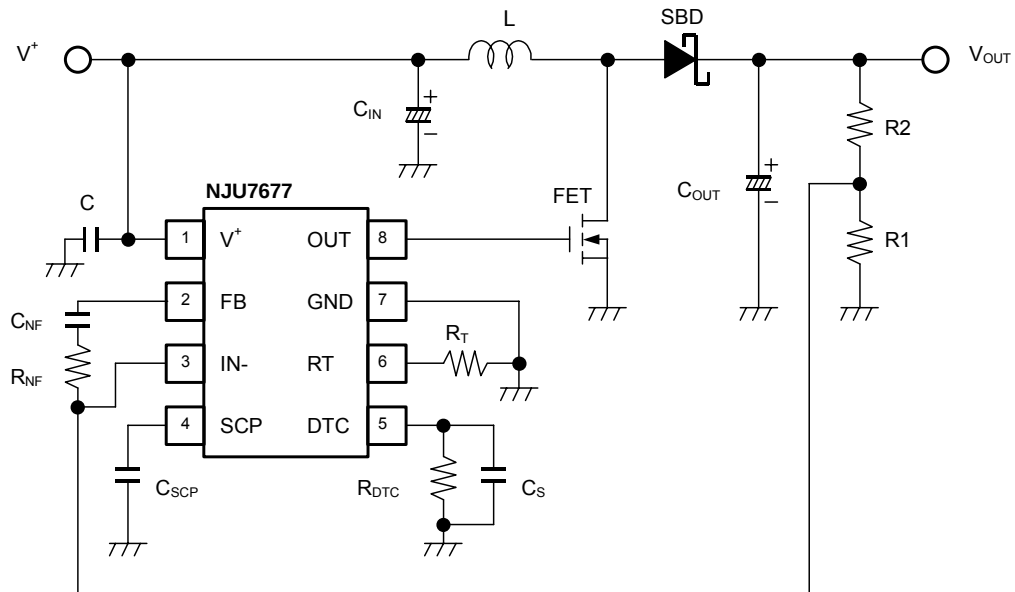


Flyback Converter

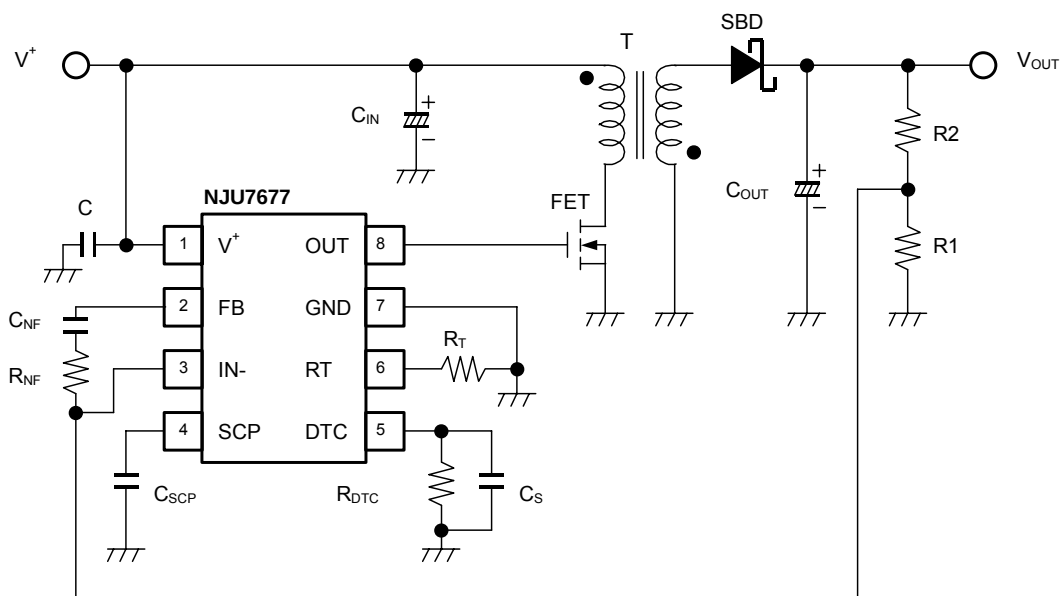


■ TYPICAL CHARACTERISTICS


Oscillation Frequency vs. Timing Resistance
($V^+ = 3.3\text{V}$, $T_a = 25^\circ\text{C}$)

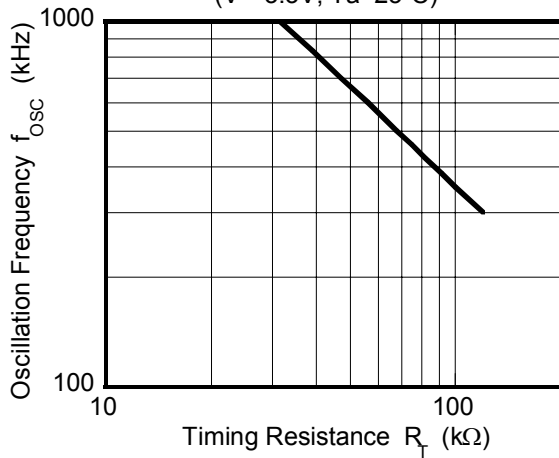


Maximum Duty Cycle vs. Oscillator Frequency
($V^+ = 3.3\text{V}$, $T_a = 25^\circ\text{C}$)

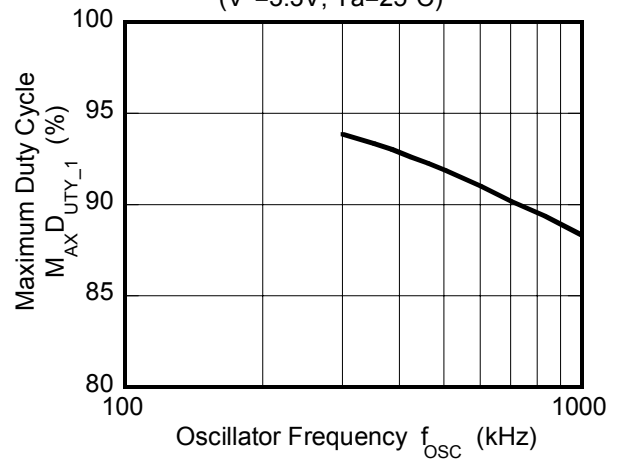


Oscillation Frequency vs. Operating Voltage
($R_T = 47\text{k}\Omega$, $T_a = 25^\circ\text{C}$)

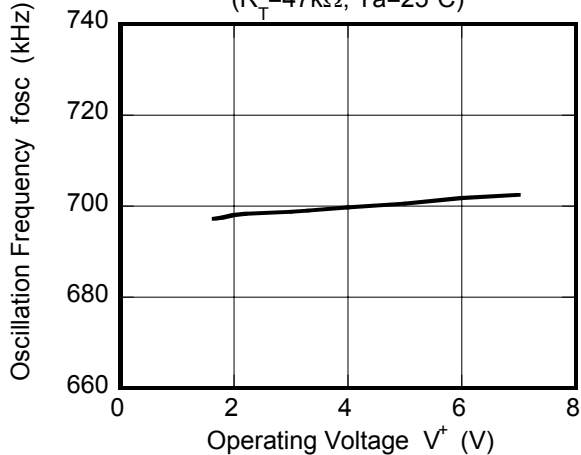


Duty Cycle vs. R_{DTC}

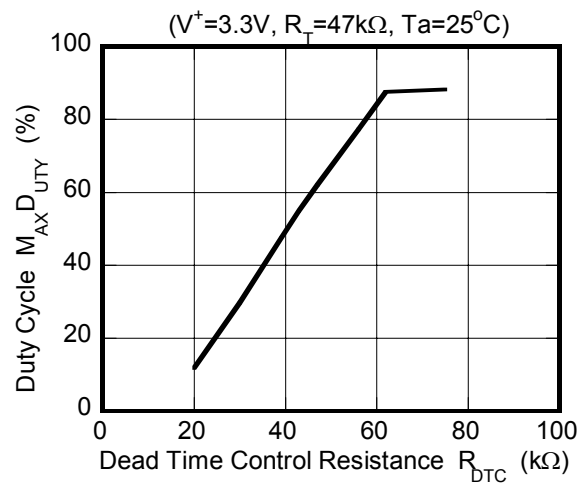




Reference Voltage vs. Operating Voltage
($T_a = 25^\circ\text{C}$)

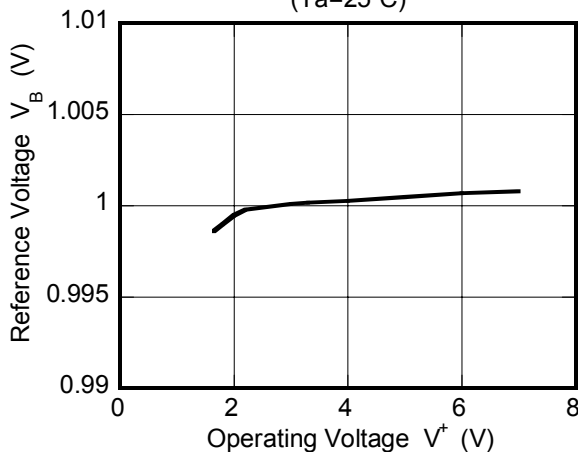







Quiescent Current vs. Operating Voltage
($R_T = 47\text{k}\Omega$, $R_L = \text{Non Load}$, $T_a = 25^\circ\text{C}$)

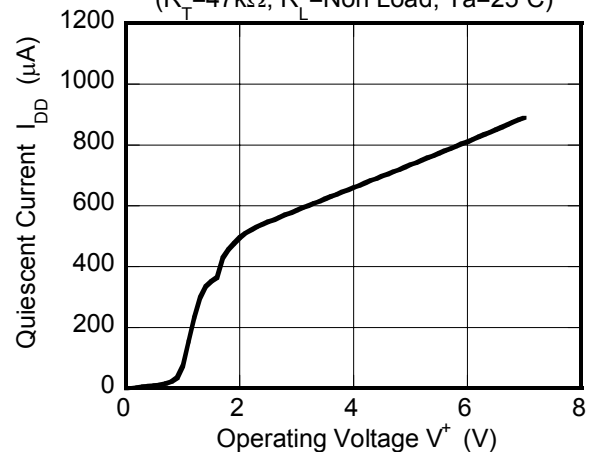

■ TYPICAL CHARACTERISTICS

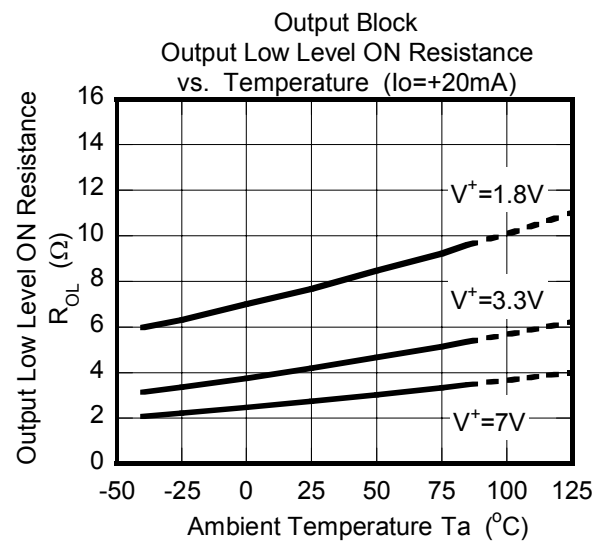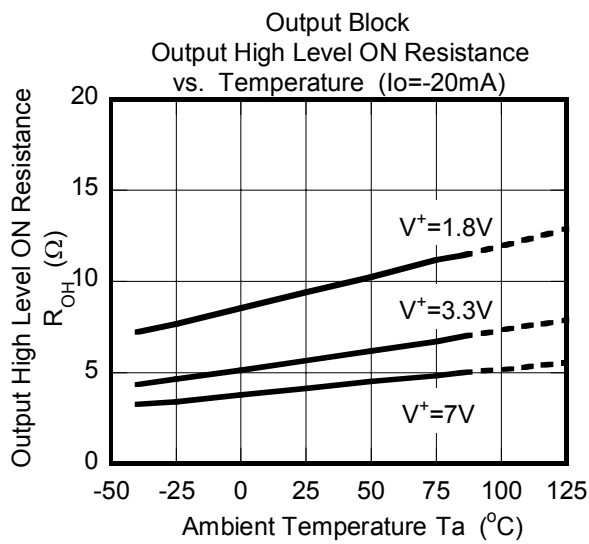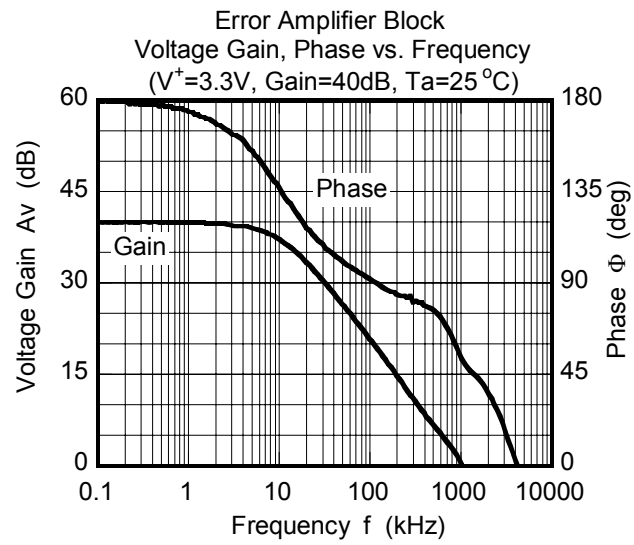

■ TYPICAL CHARACTERISTICS

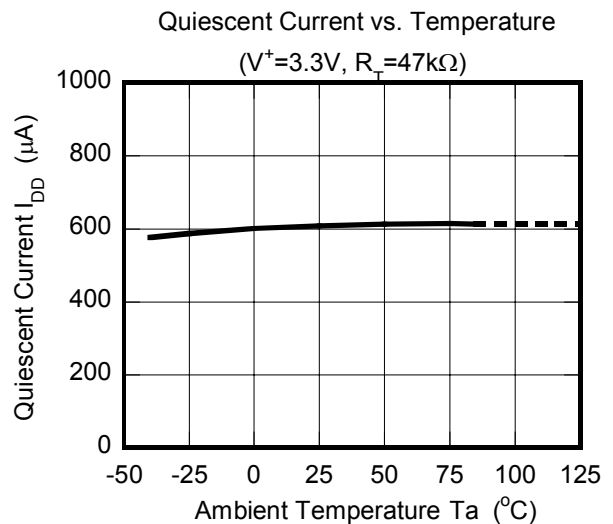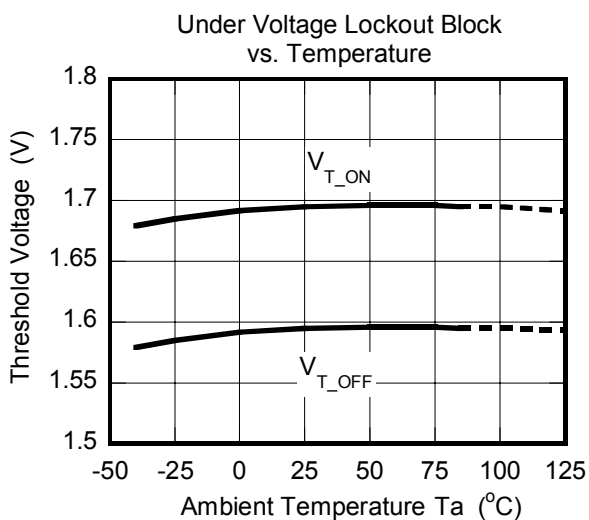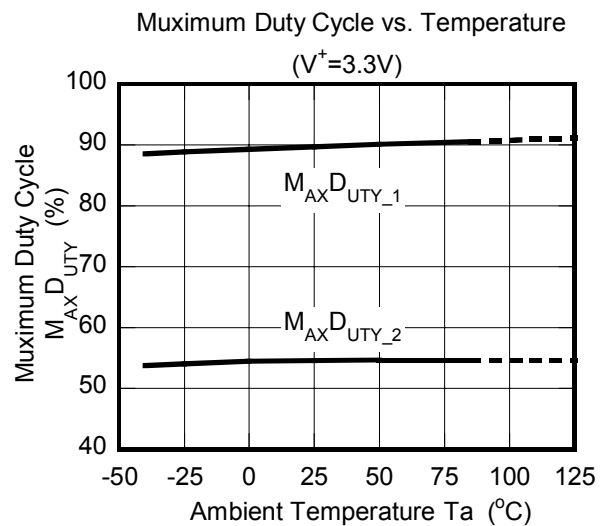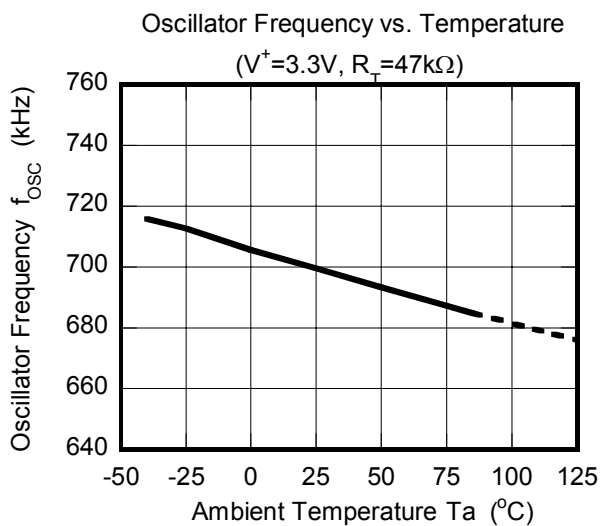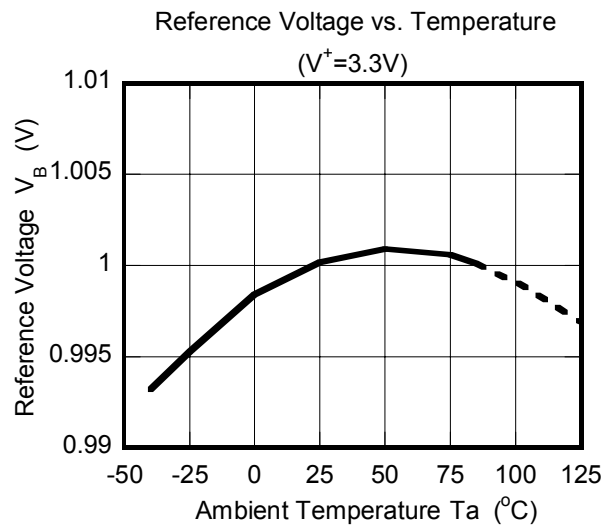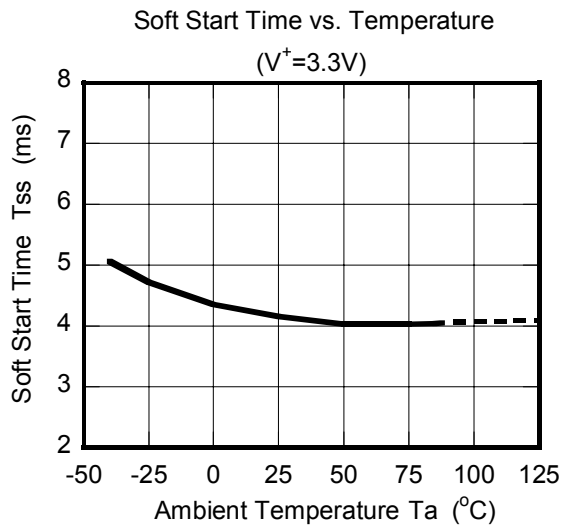

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.