

Specification

NT100C . NT110C . NT125C

All exposed cast aluminum components are made of non corrosive pure aluminum copper free (Aluminum is less than .1% copper content.#356 alloy.)

Finish: All polyester powder baked coatings preceded with a 5 baths preparation process. Meets military grade MIL-C781706 with a 2000 hours salt spray test.



- Pulse rated medium base porcelain socket.
- 75W/600V thermoplastic compact fluorescent socket.
- One-piece molded silicone gasket with memory retention.
- High power factor CWA ballast. Or 98% P.F.electronic smart ballast with end of life detection for compact fluorescent.
- All stainless steel hardware.
- All Moving and removable parts are sealed with a memory retention silicone gasket.

- 1- Closed cast aluminum housing.
- 2- Semi-specular aluminum reflector, with vertical lamp position to provide uniform light on the diffuser.
(Side lamp mount for H100 source.)
- 3- Borosilicate frosted glass diffuser with internal concentric reinforcement prismatic pattern.
- 4- Selection of two glass ring and glass shield.


NT100C: One piece cast aluminum cross cage.

NT110C: Full glass lens with cast aluminum retainer ring.

NT125C: One piece heavy cast aluminum star cage.

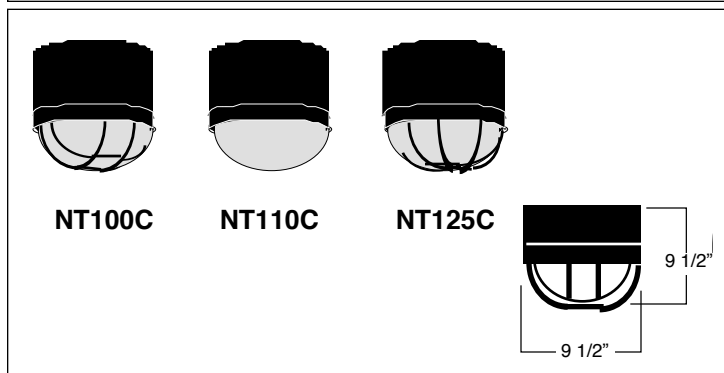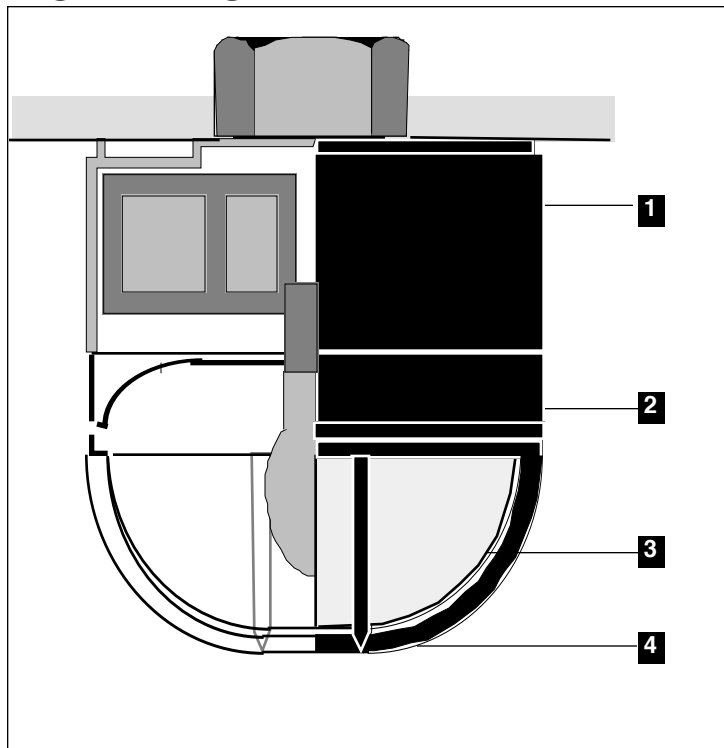

Photometry



Separate updated technical specification sheets with related models and light sources with I.E.S formatted photometry are available on www.luminis.com.

Certification

UL. Wet Location.

Mounting

Max. Max. weight: 19 lbs. Installation: Mounts over a standard 4" octagonal electrical box with 3 1/2" c/c mounting holes.

For options details and specifications, please refer to page 72

Model#	Light source selection	Voltage	Finish	Options
☐ NT100C ☐ NT110C ☐ NT125C	CF (Gx24q) Single lamp ☐ F118 ☐ F126 ☐ F132 ☐ F142 CF (Gx24q) Two lamps ☐ F218 ☐ F226 ☐ F232 INC. (A19) ☐ A100 MH (ED17) ☐ M50 HPS (ED17) ☐ H50	120 V Standard factory prewired (If no voltage is specified) For other voltages, please specify with catalog number. H.I.D. ☐ 208 V ☐ 240 V ☐ 277 V ☐ 347 V Note: 50W.HPS is available with 120/277V only. COMP. FLUO. Smart ballast 120/277 ☐ 347 V (To specify)	(Refer to color chart) Standard selection ☐ WHT: Snow white ☐ BKT: Jet black ☐ BZT: Bronze ☐ GRT: Titanium gray ☐ DGT: Gun metal ☐ CHT: Champagne ☐ MST: Matte silver ☐ GNT: Forest green Optional colors ☐ CS: Custom color ☐ RAL: RAL# color	Accessories ☐ PC1: Polycarbonate lens diffuser. (Max.50W) ☐ SWK: Surface mount connection box. Electrical ☐ EM42S: 1 lamp (26/32/42W) ☐ FS: Fuse ☐ QS: Standby lamp socket. ☐ QRS: H.I.D. lamp restrike Note: EM optional battery test switch and pilot lamp are remotely installed.

Luminaires may be altered for design improvements or discontinued without prior notice.


General notes:

Please specify selected option as a suffix to the specified model number. ex:NT100-M100-WHT-PC1

Each model is provided with a listing of compatible options. Some options may not be compatible when used in the same luminaire. This information is indicated when it is applicable.

Square lens Diffuser.


Option: **PC6**



High impact acrylic lens diffuser.
Max: 50W

Surface connection box

Option: **SWK**



1 1/2" deep luminaire matching
connection box for surface conduit
feed. (2) 7/8" dia. K.O. @ 180 deg.

White translucent round diffuser.


Option: **PC1**



Polycarbonate
lens diffuser
Max: 50W

Alternate regressed reflector.

Option: **R2**



Satin anodized
corrugated
reflector
surface.

Quartz lamp restrike

Option: **QRS**



Quartz restrike
standby lamp kit
max. 100w DC
bayonet type

Ceiling surface mounting

Option: **C**



Ceiling surface mount conversion kit.
Maximum wattage 2x32w compact
fluorescent. (factory installed.)

White translucent round diffuser.

Option: **PC2**



High impact acrylic lens diffuser.
Max: 50W

White translucent oblong diffuser.

Option: **PCO**



Polycarbonate
lens diffuser
Max: 50W

In line fuse

Option: **FS**

3 Amps. in line protection fuse,
factory installed with the pole
or inside fixture when pole is
not required.



Light photo sensor

Option: **PH1** -120V
PH2 - 208/277V

Photo electric sensor,
factory installed with the pole
or inside fixture when pole is
not required.



Emergency line quartz lamp

Option: **QS**



Quartz lamp socket for
separate emergency
line. Max. 100w DC
bayonet type

Emergency battery back-up

EM42 / EM42S


One lamp:

26w: 450 Lmns..
32w: 575 Lmns..
42w: 750 Lmns.

Time: 90 Mnts -120/277V / T 0° C

For 57w & 70w:
(Remote installation only) Consult factory

EM Ballast wiring
diagram for 120V
factory connection.

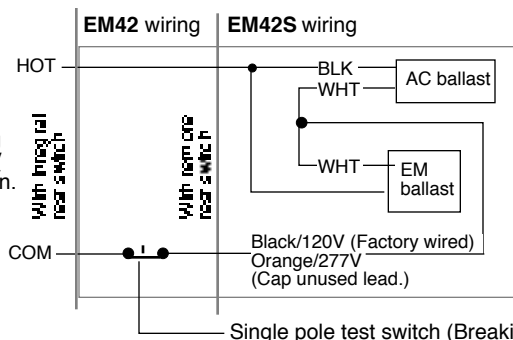

Note:

EM42 option is supplied
with integral test switch and
pilot light.

EM42S is supplied with
additional wiring for
external remotely installed
test switch and pilot light.

Please refer to luminaire
specification sheet option
listing.

Luminaires may be altered for design improvements or discontinued without prior notice.

LUMINIS [USA] - 3555 NW 53rd Court, Fort Lauderdale, FL.33309
LUMINIS [Canada] - 87 C Brunswick D.D.O. Q.C. Canada H9B 2J5

Tel: 954 .717 .4155 Fax: 954 . 717.4157
Toll free: 888 .401 .6999

Web: www.luminis.com
Sept. 2006 Rev. Feb.2008