

Silicon PNP Power Transistors

2SB1366

DESCRIPTION


- With TO-220F package
- Complement to type 2SD2058
- Low collector saturation voltage:
 $V_{CE(SAT)} = -1.0V(\text{Max})$ at $I_C = -2A, I_B = -0.2A$
- Collector power dissipation:
 $P_C = 25W(T_C = 25^\circ\text{C})$

APPLICATIONS

- With general purpose applications

PINNING

PIN	DESCRIPTION
1	Emitter
2	Collector
3	Base

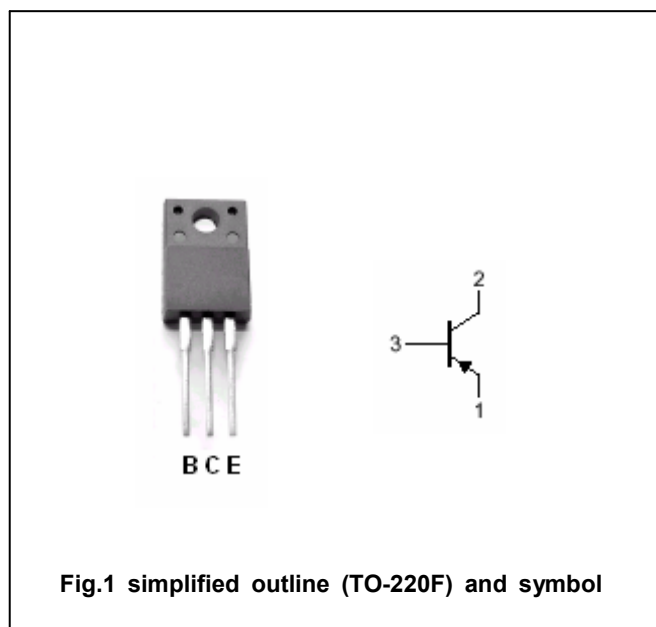Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-60	V
V_{CEO}	Collector-emitter voltage	Open base	-60	V
V_{EBO}	Emitter-base voltage	Open collector	-7	V
I_C	Collector current		-3	A
I_B	Base current		-0.5	A
P_C	Collector dissipation	$T_a = 25^\circ\text{C}$	2.0	W
		$T_C = 25^\circ\text{C}$	25	
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

Silicon PNP Power Transistors

2SB1366

CHARACTERISTICS

Tj=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=-50mA$; $I_B=0$	-60			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=-2A$; $I_B=-0.2A$			-1.0	V
V_{BE}	Base-emitter on voltage	$I_C=-0.5A$; $V_{CE}=-5V$			-1.0	V
I_{CBO}	Collector cut-off current	$V_{CB}=-60V$; $I_E=0$			-0.1	mA
I_{EBO}	Emitter cut-off current	$V_{EB}=-7V$; $I_C=0$			-0.1	mA
h_{FE-1}	DC current gain	$I_C=-0.5A$; $V_{CE}=-5V$	60		200	
h_{FE-2}	DC current gain	$I_C=-3A$; $V_{CE}=-5V$	20			
f_T	Transition frequency	$I_C=-0.5A$; $V_{CE}=-5V$		9.0		MHz
C_{OB}	Collector output capacitance	$f=1MHz$; $V_{CB}=-10V$		150		pF

Switching times

t_{on}	Turn-on time	$I_C=-2.0A$; $I_{B1}=-I_{B2}=-0.2A$ $V_{CC}=-30V$, $R_L=15\Omega$		0.4		μs
t_s	Storage time			1.7		μs
t_f	Fall time			0.5		μs


◆ h_{FE-1} Classifications

O	Y
60-120	100-200

Silicon PNP Power Transistors

2SB1366

PACKAGE OUTLINE

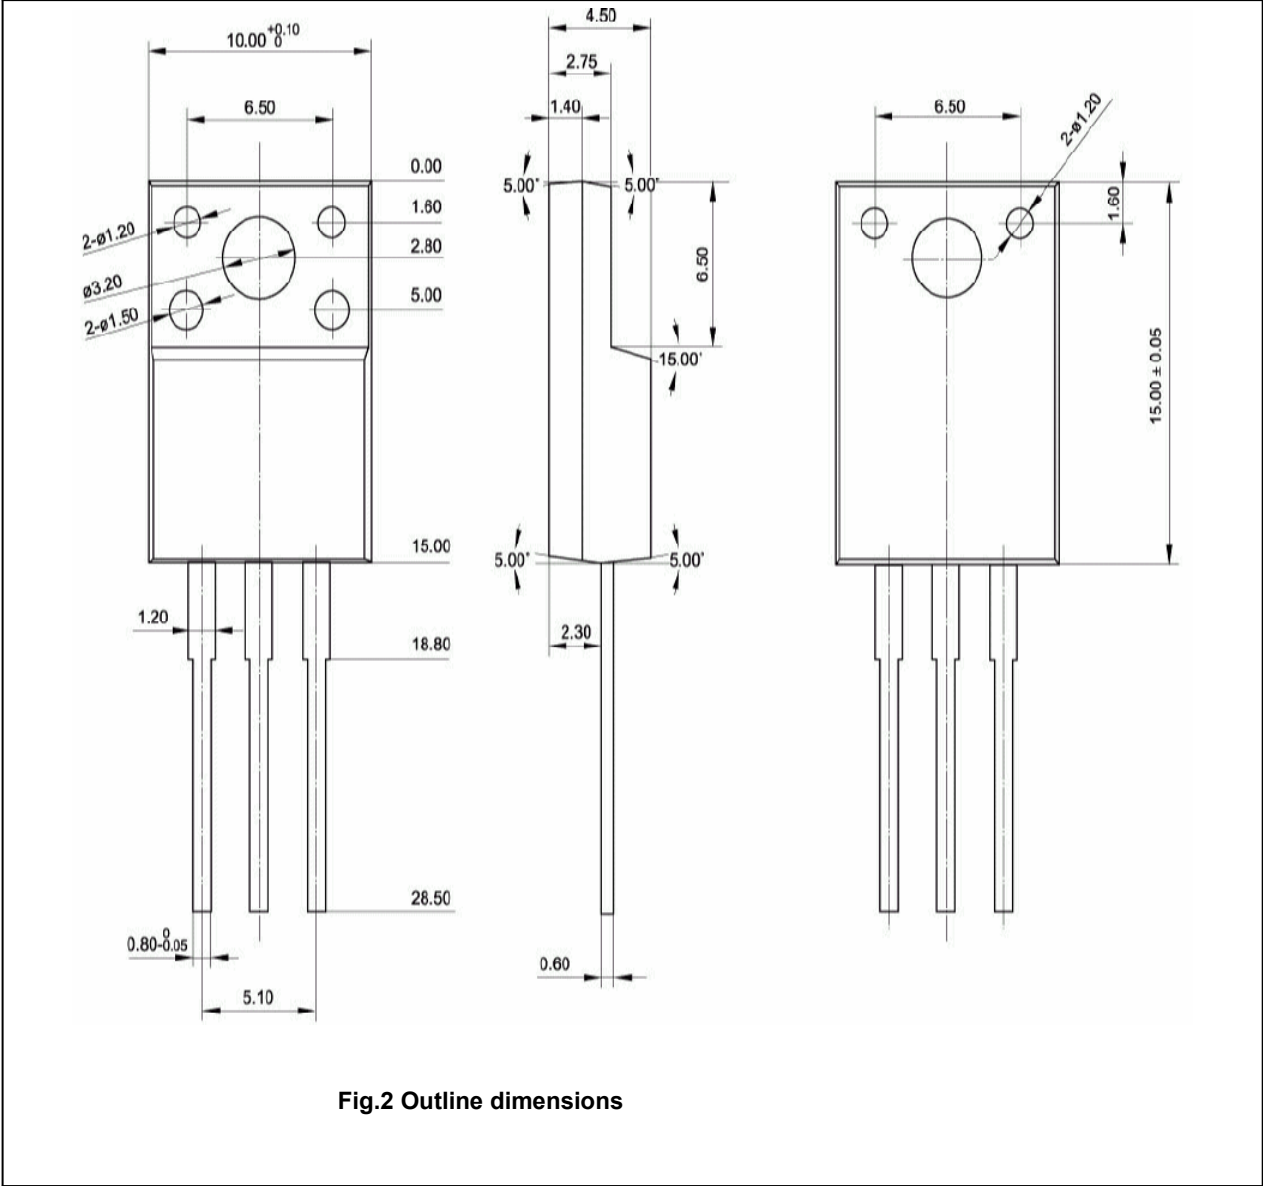

Silicon PNP Power Transistors

2SB1366

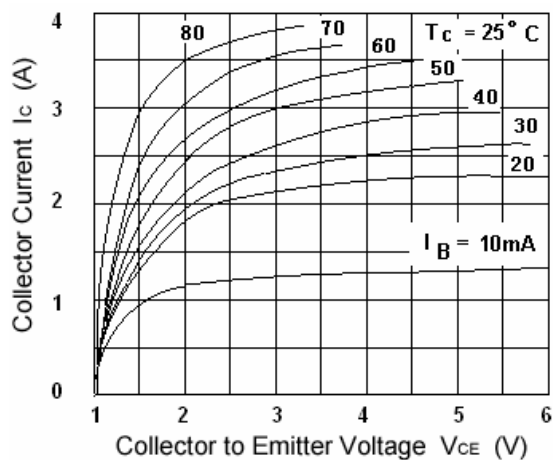


Fig.3 Static Characteristic

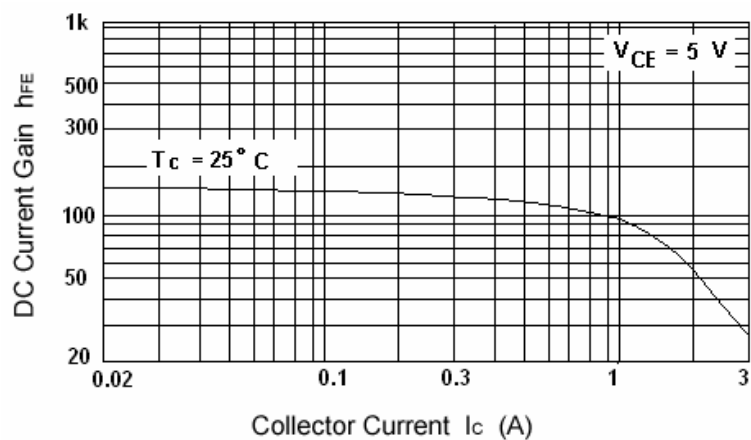


Fig.4 DC current Gain

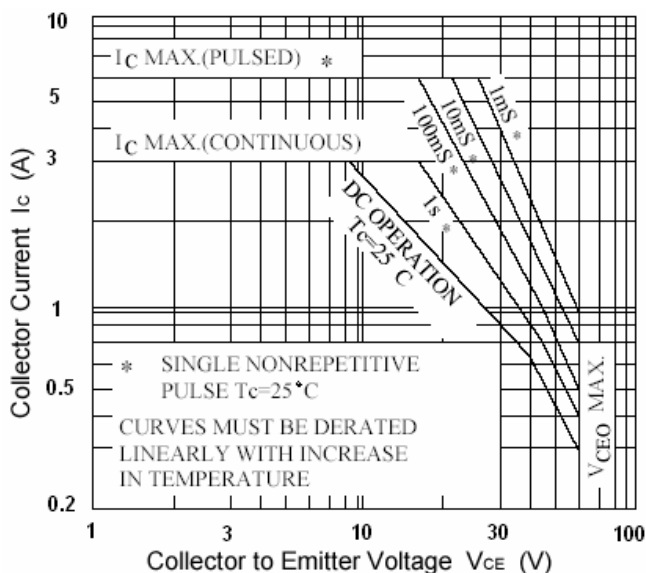


Fig.5 Safe Operating Area

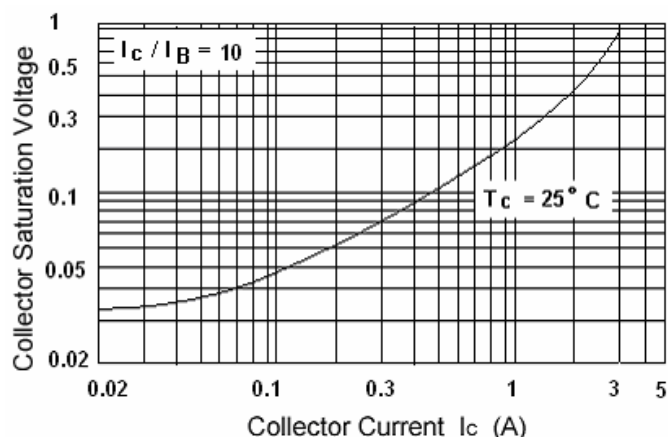


Fig.6 Collector-Emitter Saturation Voltage