

## Linear Systems replaces discontinued Siliconix PN5019

### The PN5019 is a single P-Channel JFET switch

This p-channel analog switch is designed to provide low on-resistance and fast switching.

The TO-92 provides a low cost option and ease of manufacturing.

(See Packaging Information).

#### PN5019 Benefits:

- Low Insertion Loss
- No offset or error voltage generated by closed switch
- Purely resistive

#### PN5019 Applications:

- Analog Switches
- Commutators
- Choppers

#### FEATURES

DIRECT REPLACEMENT FOR SILICONIX PN5019

ZERO OFFSET VOLTAGE

LOW ON RESISTANCE  $r_{DS(on)} \leq 150\Omega$

#### ABSOLUTE MAXIMUM RATINGS

@ 25°C (unless otherwise noted)

#### Maximum Temperatures

Storage Temperature -55°C to +200°C

Operating Junction Temperature -55°C to +200°C

#### Maximum Power Dissipation

Continuous Power Dissipation 500mW

#### MAXIMUM CURRENT

Gate Current (Note 1)  $I_G = -50\text{mA}$

#### MAXIMUM VOLTAGES

Gate to Drain Voltage  $V_{GDS} = 30\text{V}$

Gate to Source Voltage  $V_{GSS} = 30\text{V}$

#### PN5019 ELECTRICAL CHARACTERISTICS @ 25°C (unless otherwise noted)

| SYMBOL        | CHARACTERISTIC                              | MIN | TYP. | MAX  | UNITS         | CONDITIONS                                     |
|---------------|---------------------------------------------|-----|------|------|---------------|------------------------------------------------|
| $BV_{GSS}$    | Gate to Source Breakdown Voltage            | 30  | --   | --   | V             | $I_G = 1\mu\text{A}$ , $V_{DS} = 0\text{V}$    |
| $V_{GS(off)}$ | Gate to Source Cutoff Voltage               | --  | --   | 5    | V             | $V_{DS} = -15\text{V}$ , $I_D = -1\mu\text{A}$ |
| $V_{DS(on)}$  | Drain to Source On Voltage                  | --  | --   | -0.5 | V             | $V_{GS} = 0\text{V}$ , $I_D = -3\text{mA}$     |
| $I_{DSS}$     | Drain to Source Saturation Current (Note 2) | -5  | --   | --   | mA            | $V_{DS} = -20\text{V}$ , $V_{GS} = 0\text{V}$  |
| $I_{GSS}$     | Gate Reverse Current                        | --  | --   | 2    | nA            | $V_{GS} = 15\text{V}$ , $V_{DS} = 0\text{V}$   |
| $I_{D(off)}$  | Drain Cutoff Current                        | --  | --   | -10  | $\mu\text{A}$ | $V_{DS} = -15\text{V}$ , $V_{GS} = 12\text{V}$ |
| $I_{DGO}$     | Drain Reverse Current                       | --  | --   | -2   | nA            | $V_{DG} = -15\text{V}$ , $I_S = 0\text{A}$     |
| $r_{DS(on)}$  | Drain to Source On Resistance               | --  | --   | 150  | $\Omega$      | $I_D = -1\text{mA}$ , $V_{GS} = 0\text{V}$     |

#### PN5019 DYNAMIC ELECTRICAL CHARACTERISTICS @ 25°C (unless otherwise noted)

| SYMBOL       | CHARACTERISTIC                | MIN | TYP. | MAX | UNITS    | CONDITIONS                                                        |
|--------------|-------------------------------|-----|------|-----|----------|-------------------------------------------------------------------|
| $r_{DS(on)}$ | Drain to Source On Resistance | --  | --   | 150 | $\Omega$ | $I_D = 0\text{A}$ , $V_{GS} = 0\text{V}$ , $f = 1\text{kHz}$      |
| $C_{iss}$    | Input Capacitance             | --  | --   | 45  | pF       | $V_{DS} = -15\text{V}$ , $V_{GS} = 0\text{V}$ , $f = 1\text{MHz}$ |
| $C_{rss}$    | Reverse Transfer Capacitance  | --  | --   | 10  | pF       | $V_{DS} = 0\text{V}$ , $V_{GS} = 7\text{V}$ , $f = 1\text{MHz}$   |

#### PN5019 SWITCHING CHARACTERISTICS @ 25°C (unless otherwise noted)

| SYMBOL       | CHARACTERISTIC     | MIN | TYP. | MAX | UNITS | CONDITIONS                                         |
|--------------|--------------------|-----|------|-----|-------|----------------------------------------------------|
| $t_{d(on)}$  | Turn On Time       | 15  | --   | --  | ns    | $V_{GS(L)} = 7\text{V}$<br>$V_{GS(H)} = 0\text{V}$ |
| $t_r$        | Turn On Rise Time  | 75  | --   | --  | ns    | See Switching Circuit                              |
| $t_{d(off)}$ | Turn Off Time      | 25  | --   | --  | ns    |                                                    |
| $t_f$        | Turn Off Fall Time | 100 | --   | --  | ns    |                                                    |

Note 1 - Absolute maximum ratings are limiting values above which PN5019 serviceability may be impaired.

Note 2 - Pulse test:  $PW \leq 300\mu\text{s}$ , Duty Cycle  $\leq 3\%$

#### PN5019 SWITCHING CIRCUIT PARAMETERS


|             |               |
|-------------|---------------|
| $V_{DD}$    | -6V           |
| $V_{GG}$    | 8V            |
| $R_L$       | 1.8k $\Omega$ |
| $R_G$       | 390 $\Omega$  |
| $I_{D(on)}$ | -3mA          |

Available Packages:


PN5019 in TO-92  
PN5019 in bare die.

Please contact Micross for full package and die dimensions

TO-92 (Bottom View)



#### SWITCHING TEST CIRCUIT

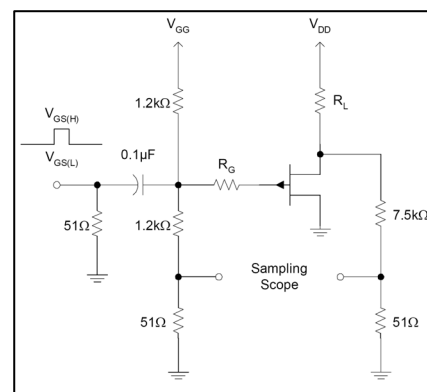

Micross Components Europe