

# PQ035ZN01ZPH

Low Voltage Operation, Compact Surface Mount type Low Power-Loss Voltage Regulator

## Features

1. Low voltage output  
( $V_O=0.8$  to  $1.2V$ )
2. Low voltage operation:  $V_{IN(MIN)}=1.7V$
3. Output current : 1A
4. Built-in overcurrent and overheat protection functions
5. Conform to Flow Soldering SC-63 package
6. Ceramic capacitor compatible
7. RoHS directive compliant

## Applications

1. AV equipment
2. OA equipment

## Absolute Maximum Ratings

( $T_a=25^{\circ}C$ )

| Parameter                             | Symbol    | Rating      | Unit        |
|---------------------------------------|-----------|-------------|-------------|
| *1 Input voltage                      | $V_{IN}$  | 5.5         | V           |
| *1 Bias supply voltage                | $V_B$     | 7           | V           |
| *1 Output adjustment terminal voltage | $V_{adj}$ | 5           | V           |
| Output current                        | $I_O$     | 1           | A           |
| *2 Power dissipation                  | $P_D$     | 8           | W           |
| *3 Junction temperature               | $T_j$     | 150         | $^{\circ}C$ |
| Operating temperature                 | $T_{opr}$ | -40 to +85  | $^{\circ}C$ |
| Storage temperature                   | $T_{stg}$ | -40 to +150 | $^{\circ}C$ |
| Soldering temperature                 | $T_{sol}$ | 260(10s)    | $^{\circ}C$ |


\*1 All are open except GND and applicable terminals.

\*2  $P_D$ : With infinite heat sink

\*3 There is case that over heat protection function operates at the temperature  $T_j=125^{\circ}C$  to  $150^{\circ}C$ , this item cannot be used in this temperature range.

## Outline Dimensions

(Unit : mm)

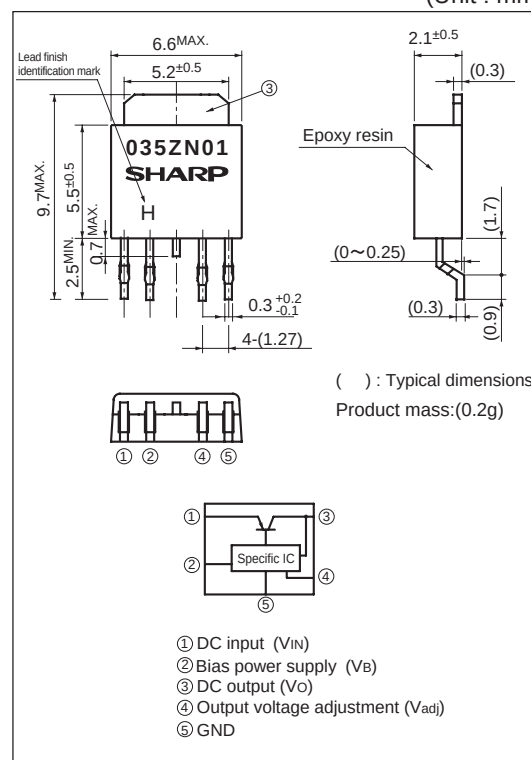

Lead finish: Lead-free solder plating  
(Composition: Sn2Cu)

Notice The content of data sheet is subject to change without prior notice.

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

### Electrical Characteristics

Unless otherwise specified, condition shall be  $V_{IN}=1.8V, V_B=3.3V, V_O=1.2V(R_1=1k\Omega), I_O=0.5A, T_a=25^\circ C$

| Parameter                                    | Symbol        | Conditions                                         | MIN.      | TYP.      | MAX. | Unit |
|----------------------------------------------|---------------|----------------------------------------------------|-----------|-----------|------|------|
| Input voltage                                | $V_{IN}$      | $0.8V \leq V_O \leq 1.2V$                          | 1.7       | -         | 5.5  | V    |
|                                              |               | $1.2V < V_O \leq 3.5V$                             | $V_O+0.5$ | -         | 5.5  | V    |
| Bias supply voltage                          | $V_B$         | -                                                  | 2.35      | -         | 7.0  | V    |
| Output voltage                               | $V_O$         | -                                                  | 0.8       | -         | 3.5  | V    |
| Load regulation                              | $Reg_L$       | $I_O=5mA$ to 1A                                    | -         | 0.2       | 0.5  | %    |
| Line regulation                              | $Reg_I$       | $V_{IN}=1.7V$ to 5.5V, $V_B=2.35$ to 7V, $I_O=5mA$ | -         | 0.3       | 0.7  | %    |
| Reference voltage                            | $V_{ref}$     | -                                                  | 0.57      | 0.6       | 0.63 | V    |
| Temperature coefficient of reference voltage | $T_C V_{ref}$ | $T_j=0$ to $+125^\circ C, I_O=5mA$                 | -         | $\pm 0.5$ | -    | %    |
| Ripple rejection                             | RR1           | Refer to Fig.2                                     | -         | 65        | -    | dB   |
|                                              | RR2           | Refer to Fig.3                                     | -         | 53        | -    | dB   |
| Bias power supply input current              | $I_B$         | $I_O=0A$                                           | -         | 1.5       | 2    | mA   |

Fig.1 Test Circuit

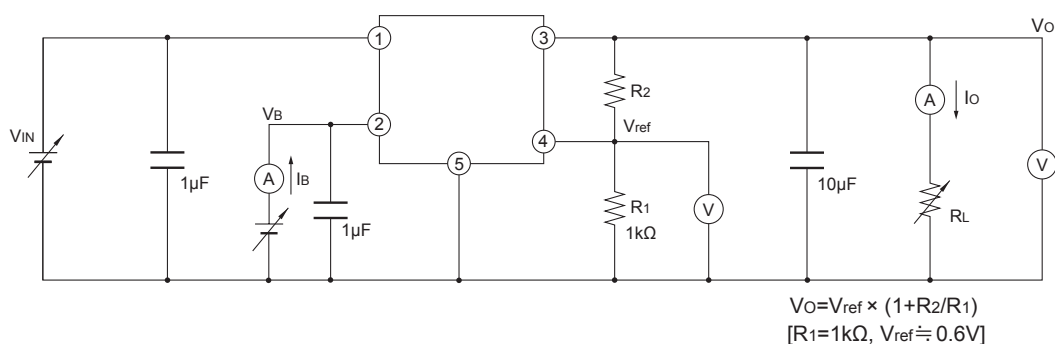


Fig.2 Test Circuit for Ripple Rejection (1)

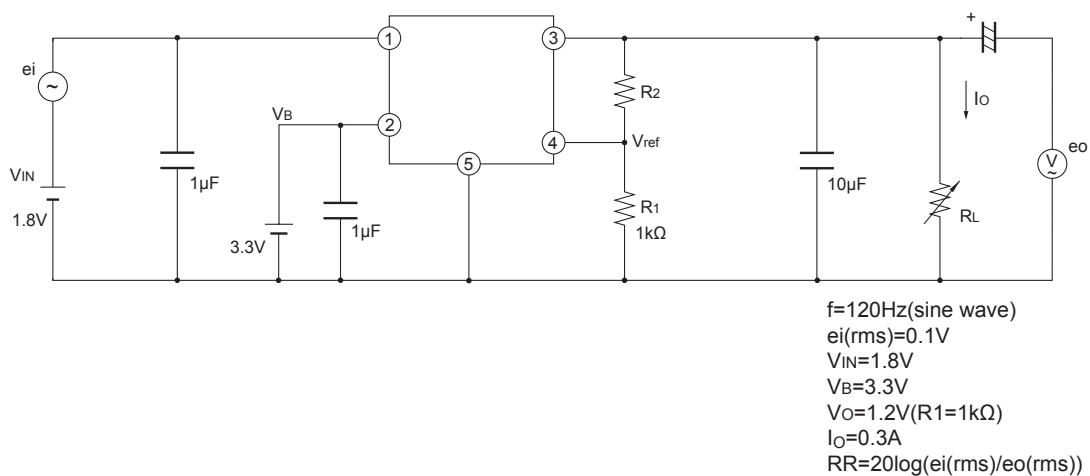


Fig.3 Test Circuit for Ripple Rejection (2)

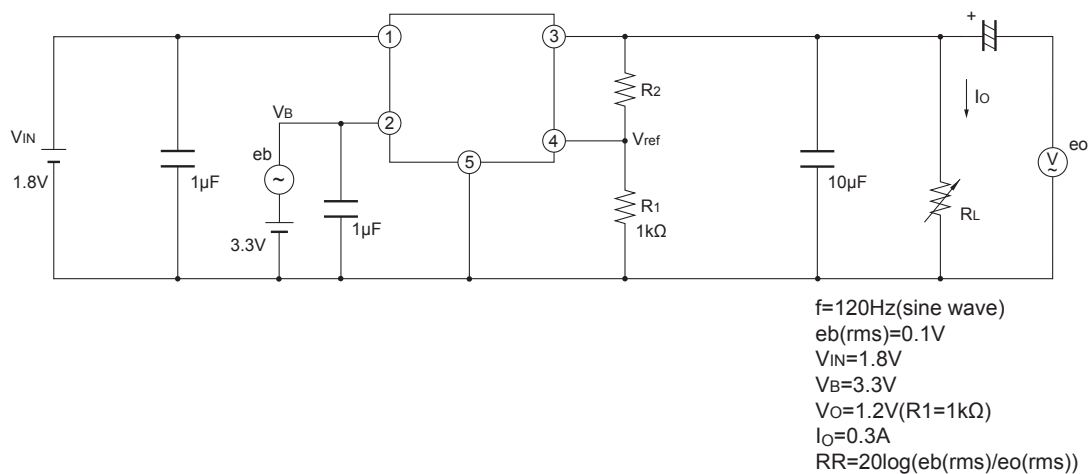


Fig.4 Power Dissipation vs. Ambient Temperature

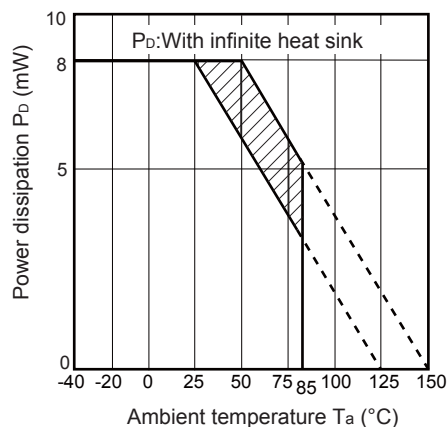


Fig.5 Overcurrent Protection Characteristics

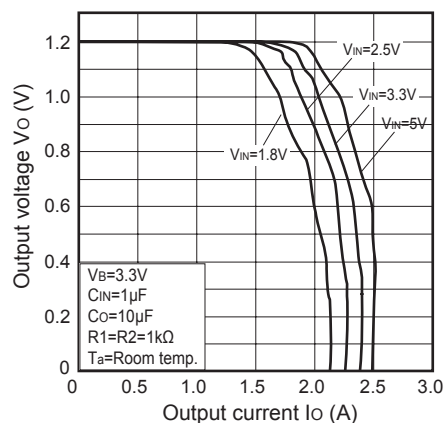


Fig.6 Reference Voltage vs. Ambient Temperature

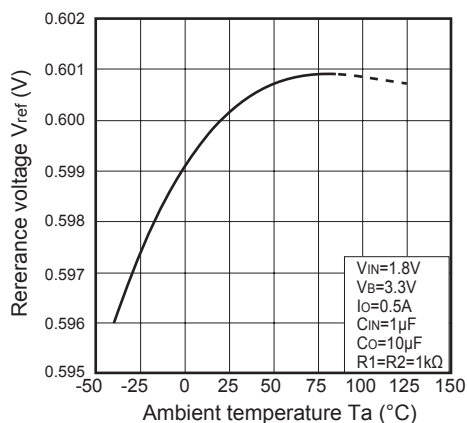


Fig.7 Load Regulation vs. Ambient Temperature

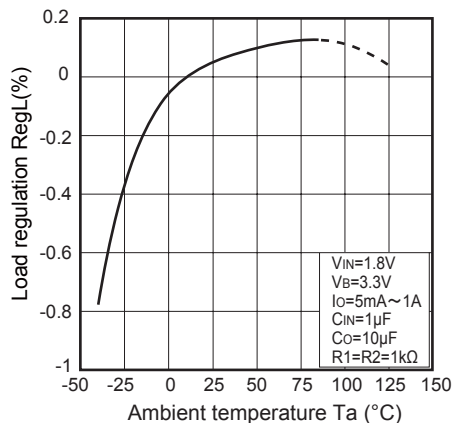


Fig.8 Line Regulation vs. Ambient Temperature

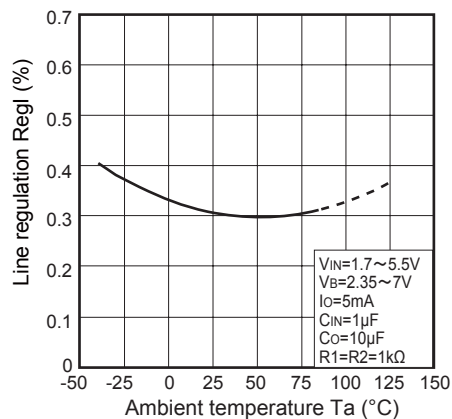


Fig.9 Bias Inflow Current vs. Ambient Temperature

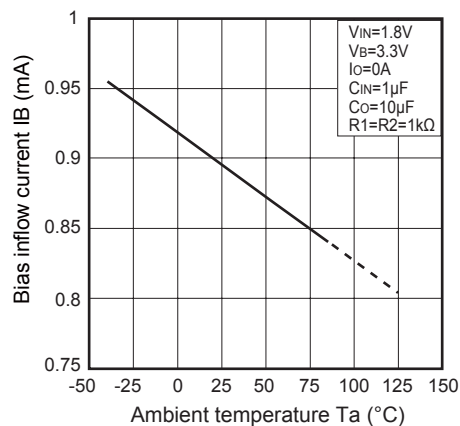


Fig.10 Short circuit Current vs. Ambient Temperature

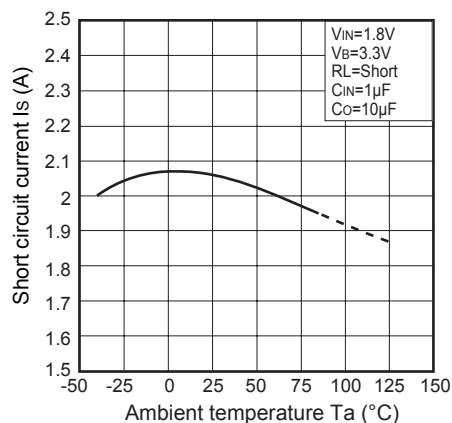


Fig.11 Output Voltage vs. Input Voltage

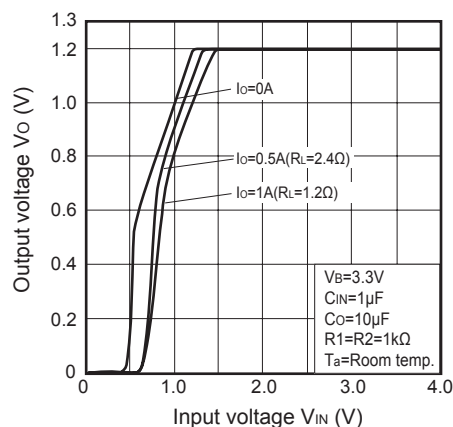


Fig.12 Output Voltage vs. Bias Supply Voltage

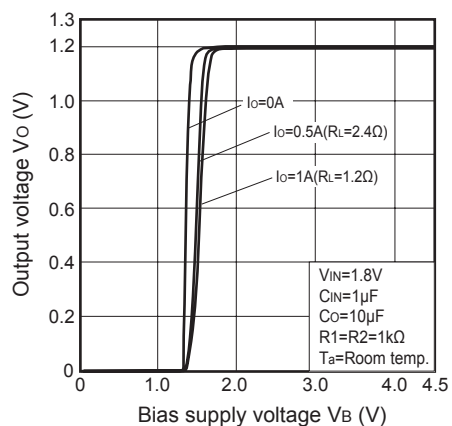


Fig.13 Dropout Voltage vs. Ambient Temperature

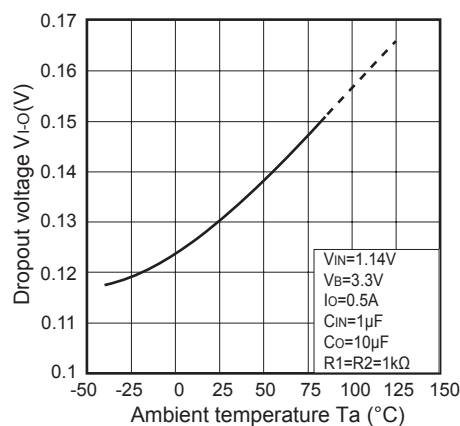


Fig.14 Output Voltage Deviation vs. Output Current

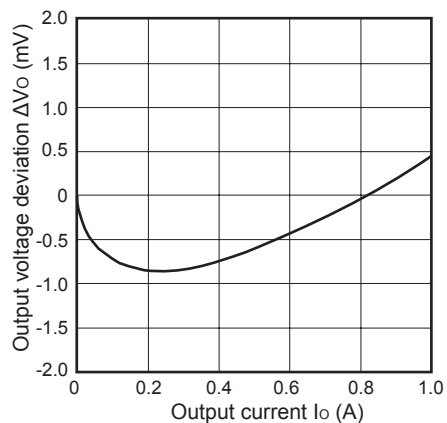


Fig.15 Output Voltage Deviation vs. Input Voltage / Bias Supply Voltage

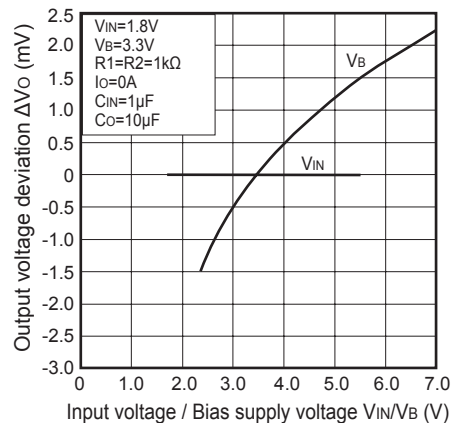


Fig.16 Input Current vs. Input Voltage

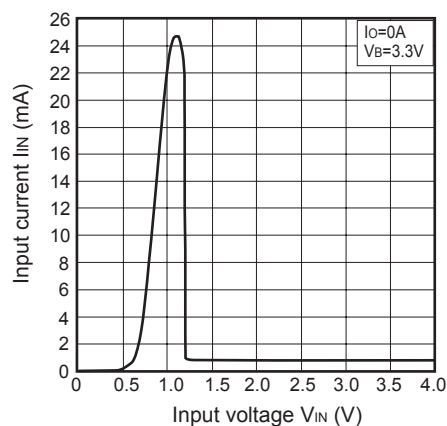


Fig.17 Bias Inflow Current vs. Input Voltage

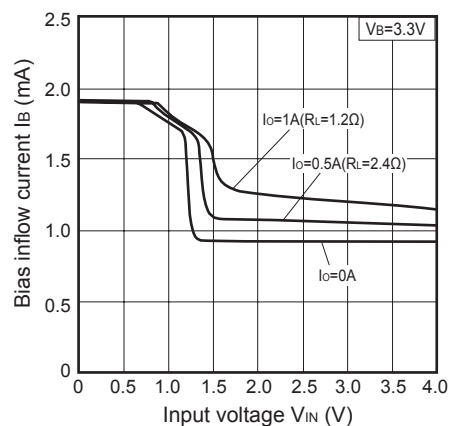


Fig.18 Bias Inflow Current vs. Bias Supply Voltage

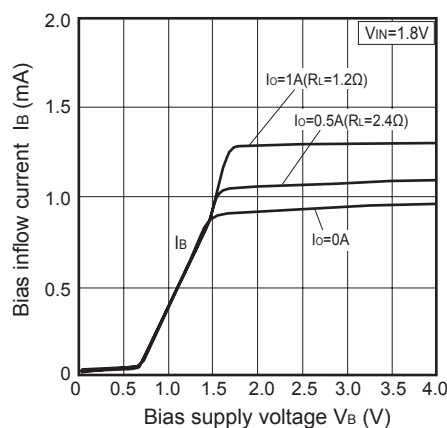


Fig.19 Output Voltage Adjustment Characteristics(Typical Value)



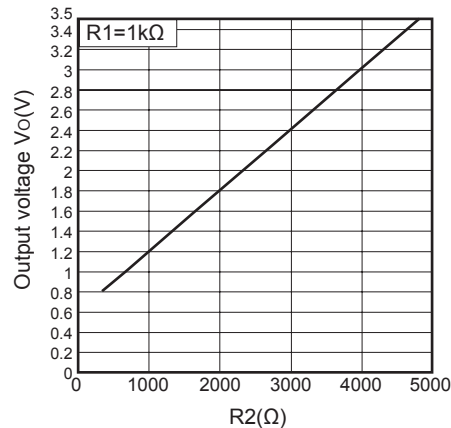


Fig.20 Power Dissipation vs. Ambient Temperature (Typical Value)

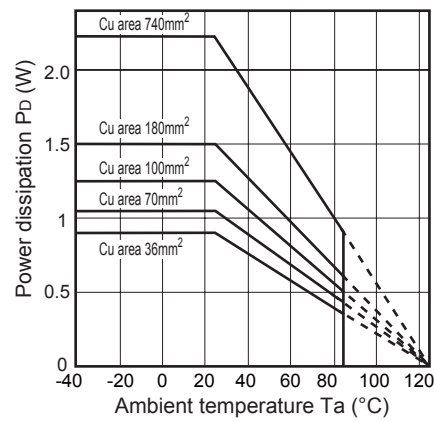

Mounting PCB



Material : Glass-cloth epoxy resin  
Size : 50×50×1.6mm  
Cu thickness : 35μm