

# XC62K

## Series

### Negative Voltage Regulators



- ◆CMOS Low Power Consumption
- ◆Small Input-Output Voltage Differential
  - : 0.12V @ 50mA,
  - 0.38V @ 100mA
- ◆Maximum Output Current : 100mA ( $V_{OUT}=-5.0V$ )
- ◆Highly Accurate :  $\pm 2\%$  ( $\pm 1\%$ )
- ◆Output Voltage Range : -2.1V ~ -6.0V
- ◆Supply Current : 3.0 $\mu$ A ( $V_{OUT}=-5.0V$ )
- ◆SOT-23/SOT-89/TO-92 Package

### General Description

The XC62K series are highly precise, low power consumption, negative voltage regulators, manufactured using CMOS and laser trimming technologies. The series achieves high output currents with small input-output voltage differentials, and consists of a high precision voltage reference, an error correction circuit, and an output driver with current limitation.

SOT-23 (150mW), SOT-89 (500mW) and TO-92 (300mW) packages are available.


### Applications

- Battery Powered Equipment
- Portable & Cellular Phones
- Various Portable Equipment
- Power Supply for GaAs Applications


### Features

- Ultra Small Input-Output Voltage Differential** : 50mA output possible with a 0.12V differential ( $V_{OUT}=-5.0V$ ).
- Maximum Output Current** : 100mA (within max. power dissipation,  $V_{OUT}=-5.0V$ )
- Output Voltage Range** : -2.1V ~ -6.0V in 0.1V increments.  
-5.0, -4.0, -3.0V, -2.5V standard.  
(All other voltages are semi-custom)
- Highly Accurate** : Output voltage  $\pm 2\%$   
( $\pm 1\%$  for semi-custom products)
- Low Power Consumption** : Typ. 3.0 $\mu$ A @  $V_{OUT}=-5.0V$
- Output Voltage Temperature Characteristics** : Typ.  $\pm 100$ ppm/ $^{\circ}$ C
- Input Stability** : Typ. 0.1%/V
- Ultra Small Packages** : SOT-23 (150mW) mini-mold,  
SOT-89 (500mW) mini-power mold  
TO-92 (300mW)


### Typical Application Circuit

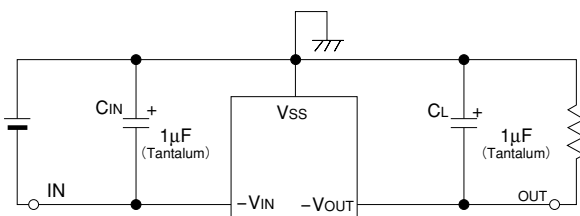

### Typical Performance Characteristic

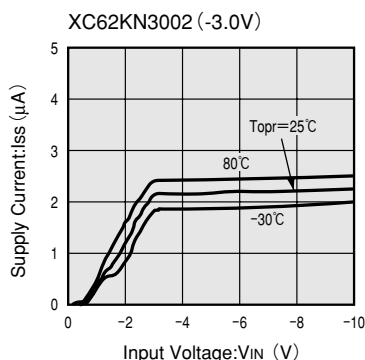

Pin Configuration

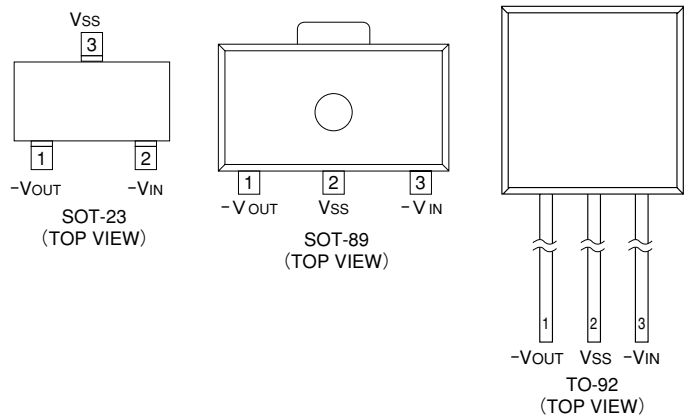

Pin Assignment

| PIN NUMBER |        |       | PIN NAME | FUNCTION           |
|------------|--------|-------|----------|--------------------|
| SOT-23     | SOT-89 | TO-92 |          |                    |
| 2          | 3      | 3     | -VIN     | Power Supply Input |
| 3          | 2      | 2     | VSS      | Ground             |
| 1          | 1      | 1     | -VOUT    | Output             |

Product Classification


Ordering Information

X C 6 2 K X X X X X X X  
          ↑    ↑    ↑    ↑    ↑  
          a   b   c   d   e   f


| DESIGNATOR | DESCRIPTION                                                 | DESIGNATOR | DESCRIPTION                                                       |
|------------|-------------------------------------------------------------|------------|-------------------------------------------------------------------|
| a          | <u>Polarity of Output Voltage</u><br>N=Negative             | e          | <u>Package Type</u><br>M=SOT-23<br>P=SOT-89<br>T=TO-92 (Standard) |
| b          | <u>Output Voltage</u><br>30=3.0V<br>50=5.0V                 |            | f                                                                 |
| c          | <u>Temperature Characteristics</u><br>0=±100ppm/°C(typical) |            |                                                                   |
| d          | <u>Accuracy</u><br>1=±1.0%(Semi-custom products)<br>2=±2.0% |            |                                                                   |

## ■ Packaging Information

### ● SOT-23

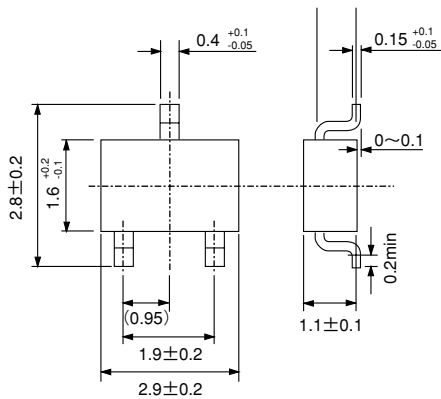


### ● SOT-89

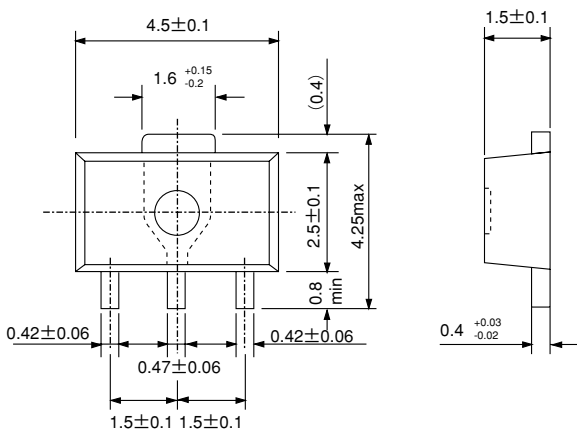


●TO-92

3

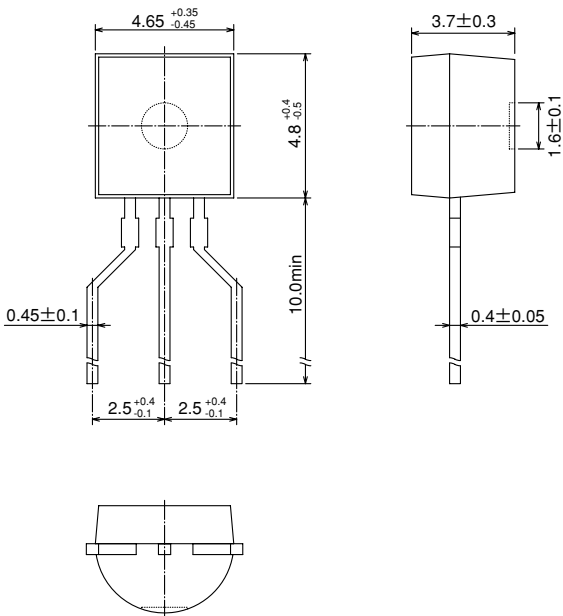

■Marking

●SOT-23, SOT-89

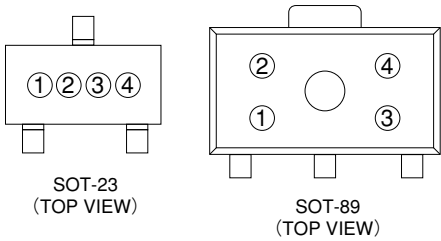

① Integral Number of Output Voltage

| DESIGNATOR | VOLTAGE(V) | DESIGNATOR | VOLTAGE(V) |
|------------|------------|------------|------------|
| 2          | 2.②        | 5          | 5.②        |
| 3          | 3.②        | 6          | 6.②        |
| 4          | 4.②        |            |            |

② Decimal number of Output Voltage


| DESIGNATOR | VOLTAGE(V) | DESIGNATOR | VOLTAGE(V) |
|------------|------------|------------|------------|
| A          | ①.0        | F          | ①.5        |
| B          | ①.1        | H          | ①.6        |
| C          | ①.2        | K          | ①.7        |
| D          | ①.3        | L          | ①.8        |
| E          | ①.4        | M          | ①.9        |

③ Polarity of Output Voltage

| DESIGNATOR | POLARITY |
|------------|----------|
| 5          | Negative |

④ Assembly Lot Number  
Based on internal standards.

●TO-92

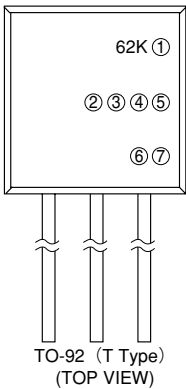

① Represents the Polarity of Output Voltage

| DESIGNATOR | OUTPUT CONFIGURATION |
|------------|----------------------|
| N          | —                    |

④ Represents the temperature Characteristics

| DESIGNATOR | TEMPERATURE CHARACTERISTICS |
|------------|-----------------------------|
| 0          | TPY $\pm$ 100ppm            |

⑤ Represents the Detect Voltage Accuracy

| DESIGNATOR | DETECT VOLTAGE ACCURACY        |
|------------|--------------------------------|
| 1          | within $\pm 1\%$ (semi-custom) |
| 2          | within $\pm 2\%$               |

⑥ Represents a least significant digit of the produced year

| DESIGNATOR | PRODUCED YEAR |
|------------|---------------|
| 0          | 2000          |
| 1          | 2001          |


⑦ Denotes the production lot number  
0 to 9, A to Z repeated(G.I.J.O.Q.W excepted)

②③ Represents the Detect Voltage

| DESIGNATOR |   | VOLTAGE (V) |
|------------|---|-------------|
| ②          | ③ |             |
| 3          | 3 | 3.3         |
| 5          | 0 | 5.0         |

3

■Block Diagram

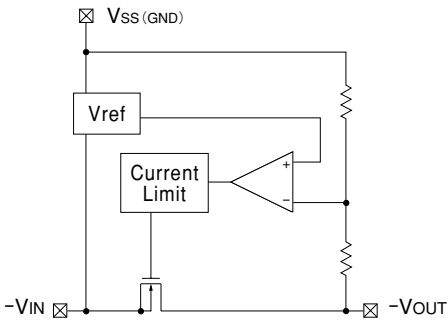

■Absolute Maximum Ratings

Ta=25°C

| PARAMETER                          |        | SYMBOL           | RATINGS                                      | UNITS |
|------------------------------------|--------|------------------|----------------------------------------------|-------|
| Input Voltage                      |        | V <sub>IN</sub>  | -12                                          | V     |
| Output Current                     |        | I <sub>OUT</sub> | 200                                          | mA    |
| Output Voltage                     |        | V <sub>OUT</sub> | -V <sub>DD</sub> -0.3 ~ V <sub>IN</sub> +0.3 | V     |
| Continuous Total Power Dissipation | SOT-23 | P <sub>d</sub>   | 150                                          | mW    |
|                                    | SOT-89 |                  | 500                                          |       |
|                                    | TO-92  |                  | 300                                          |       |
| Operating Ambient Temperature      |        | T <sub>opr</sub> | -30 ~ +80                                    | °C    |
| Storage Temperature                |        | T <sub>stg</sub> | -40 ~ +125                                   | °C    |

Note: Please ensure that I<sub>OUT</sub> is less than P<sub>d</sub> ÷ (V<sub>OUT</sub> - V<sub>IN</sub>)

## Electrical Characteristics

XC62KN5002

$V_{OUT}(T) = -5.0V$

$T_a = 25^\circ C$

| PARAMETER                                  | SYMBOL                                                | CONDITIONS                                                     | MIN                      | TYP                    | MAX                      | UNITS           |
|--------------------------------------------|-------------------------------------------------------|----------------------------------------------------------------|--------------------------|------------------------|--------------------------|-----------------|
| Output Voltage                             | $V_{OUT}(E)$                                          | $I_{OUT} = 20mA$<br>$V_{IN} = -6.0V$                           | $\times 0.98$<br>$-4.90$ | $V_{OUT}(T)$<br>$-5.0$ | $\times 1.02$<br>$-5.10$ | V               |
| Maximum Output Current                     | $I_{OUT \text{ max.}}$                                | $V_{IN} = -6.0V$ , $V_{OUT}(E) \geq -4.5V$                     | 100                      |                        |                          | mA              |
| Load Stability                             | $\Delta V_{OUT}$                                      | $V_{IN} = -6.0V$<br>$1mA \leq I_{OUT} \leq 50mA$               |                          | 40                     | 80                       | mV              |
| Input/Output Voltage Differential          | $V_{dif}$                                             | $I_{OUT} = 50mA$<br>$I_{OUT} = 100mA$                          |                          | 120<br>380             | 300<br>600               | mV              |
| Supply Current                             | $I_{SS}$                                              | $V_{IN} = -6.0V$                                               |                          | 3.0                    | 7.0                      | $\mu A$         |
| Input Stability                            | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$  | $I_{OUT} = 20mA$<br>$-6.0V \leq V_{IN} \leq -10.0V$            |                          | 0.1                    | 0.3                      | %/V             |
| Input Voltage                              | $V_{IN}$                                              |                                                                |                          |                        | -10.0                    | V               |
| Output Voltage Temperature Characteristics | $\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$ | $I_{OUT} = 20mA$<br>$-30^\circ C \leq T_{opr} \leq 80^\circ C$ |                          | $\pm 100$              |                          | ppm/ $^\circ C$ |

XC62KN4002

$V_{OUT}(T) = -4.0V$

$T_a = 25^\circ C$

| PARAMETER                                  | SYMBOL                                                | CONDITIONS                                                     | MIN                      | TYP                    | MAX                      | UNITS           |
|--------------------------------------------|-------------------------------------------------------|----------------------------------------------------------------|--------------------------|------------------------|--------------------------|-----------------|
| Output Voltage                             | $V_{OUT}(E)$                                          | $I_{OUT} = 20mA$<br>$V_{IN} = -5.0V$                           | $\times 0.98$<br>$-3.92$ | $V_{OUT}(T)$<br>$-4.0$ | $\times 1.02$<br>$-4.08$ | V               |
| Maximum Output Current                     | $I_{OUT \text{ max.}}$                                | $V_{IN} = -5.0V$ , $V_{OUT}(E) \geq -3.6V$                     | 80                       |                        |                          | mA              |
| Load Stability                             | $\Delta V_{OUT}$                                      | $V_{IN} = -5.0V$<br>$1mA \leq I_{OUT} \leq 45mA$               |                          | 40                     | 80                       | mV              |
| Input/Output Voltage Differential          | $V_{dif}$                                             | $I_{OUT} = 45mA$<br>$I_{OUT} = 90mA$                           |                          | 120<br>380             | 300<br>600               | mV              |
| Supply Current                             | $I_{SS}$                                              | $V_{IN} = -5.0V$                                               |                          | 3.0                    | 6.5                      | $\mu A$         |
| Input Stability                            | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$  | $I_{OUT} = 20mA$<br>$-5.0V \leq V_{IN} \leq -10.0V$            |                          | 0.1                    | 0.3                      | %/V             |
| Input Voltage                              | $V_{IN}$                                              |                                                                |                          |                        | -10.0                    | V               |
| Output Voltage Temperature Characteristics | $\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$ | $I_{OUT} = 20mA$<br>$-30^\circ C \leq T_{opr} \leq 80^\circ C$ |                          | $\pm 100$              |                          | ppm/ $^\circ C$ |

Note: 1.  $V_{OUT}(T)$ =Specified output voltage  
 2.  $V_{OUT}(E)$ =Effective output voltage (i.e. the output voltage when " $V_{OUT}(T) - 1.0V$ " is provided at the  $V_{IN}$  pin while maintaining a certain  $I_{OUT}$  value).  
 3.  $V_{dif} = \{V_{IN1} - V_{OUT1}\}$   
 4.  $V_{OUT1}$ =A voltage equal to 98% of the Output Voltage whenever an amply stabilised  $I_{OUT}$  ( $V_{OUT}(T) - 1.0V$ ) is input.  
 5.  $V_{IN1}$ =The Input Voltage when a voltage equal to 98% of  $V_{OUT}(E)$  appears. (Input Voltage is gradually decreased.)  
 6.  $I_{OUT \text{ max.}}$ =Please ensure that output current is within the values given for power dissipation.

XC62KN3002

$V_{OUT}(T) = -3.0V$


$T_a = 25^{\circ}C$

| PARAMETER                                  | SYMBOL                                                | CONDITIONS                                                       | MIN                      | TYP                    | MAX                      | UNITS            |
|--------------------------------------------|-------------------------------------------------------|------------------------------------------------------------------|--------------------------|------------------------|--------------------------|------------------|
| Output Voltage                             | $V_{OUT}(E)$                                          | $I_{OUT} = 20mA$<br>$V_{IN} = -4.0V$                             | $\times 0.98$<br>$-2.94$ | $V_{OUT}(T)$<br>$-3.0$ | $\times 1.02$<br>$-3.06$ | V                |
| Maximum Output Current                     | $I_{OUT\ max.}$                                       | $V_{IN} = -4.0V$ , $V_{OUT}(E) \geq -2.7V$                       | 60                       |                        |                          | mA               |
| Load Stability                             | $\Delta V_{OUT}$                                      | $V_{IN} = -4.0V$<br>$1mA \leq I_{OUT} \leq 40mA$                 |                          | 40                     | 80                       | mV               |
| Input/Output Voltage Differential          | $V_{dif}$                                             | $I_{OUT} = 40mA$<br>$I_{OUT} = 80mA$                             |                          | 120<br>380             | 300<br>600               | mV               |
| Supply Current                             | $I_{SS}$                                              | $V_{IN} = -4.0V$                                                 |                          | 2.5                    | 6.0                      | $\mu A$          |
| Input Stability                            | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$  | $I_{OUT} = 20mA$<br>$-4.0V \leq V_{IN} \leq -10.0V$              |                          | 0.1                    | 0.3                      | %/V              |
| Input Voltage                              | $V_{IN}$                                              |                                                                  |                          |                        | -10.0                    | V                |
| Output Voltage Temperature Characteristics | $\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$ | $I_{OUT} = 20mA$<br>$-30^{\circ}C \leq T_{opr} \leq 80^{\circ}C$ |                          | $\pm 100$              |                          | ppm/ $^{\circ}C$ |

Note: 1.  $V_{OUT}(T)$ =Specified output voltage  
2.  $V_{OUT}(E)$ =Effective output voltage (i.e. the output voltage when " $V_{OUT}(T) - 1.0V$ " is provided at the  $V_{IN}$  pin while maintaining a certain  $I_{OUT}$  value).  
3.  $V_{dif} = \{V_{IN1} - V_{OUT1}\}$   
4.  $V_{OUT1}$  =A voltage equal to 98% of the Output Voltage whenever an amply stabilised  $I_{OUT}$  ( $V_{OUT}(T) - 1.0V$ ) is input.  
5.  $V_{IN1}$ =The Input Voltage when a voltage equal to 98% of  $V_{OUT}(E)$  appears. (Input Voltage is gradually decreased.)  
6.  $I_{OUTmax}$ =Please ensure that output current is within the values given for power dissipation.

## ■ Typical Application Circuit

### ● Standard Circuit

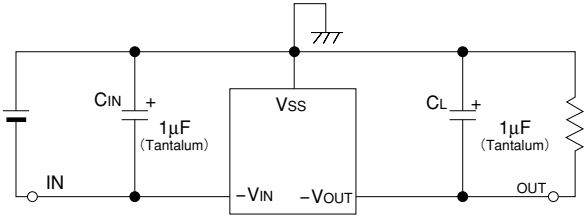


## ■ Directions for use

### ● Notes on Use


Please ensure that values for  $C_{IN}$  and  $C_L$  are more than  $1\mu F$  (Tantalum).

## Test Circuits


### 1. Supply Current

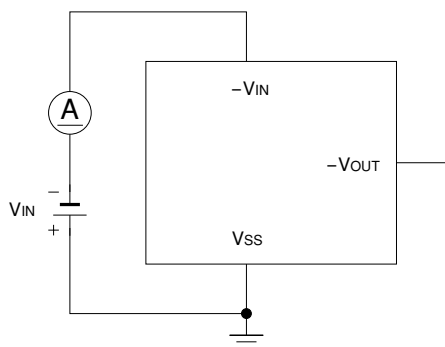


### 2. Output Voltage

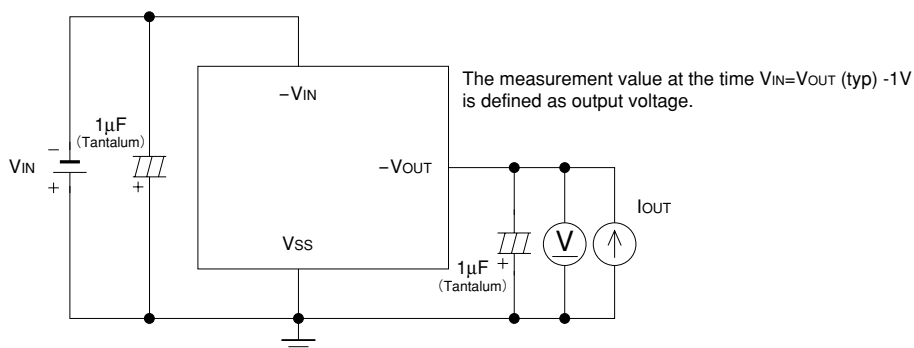

### 3. Input stability, Input/Output voltage differential

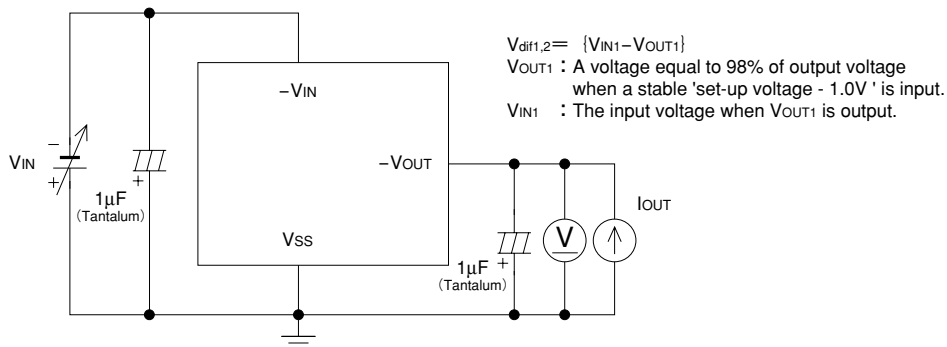







### 4. Load stability, Maximum output current

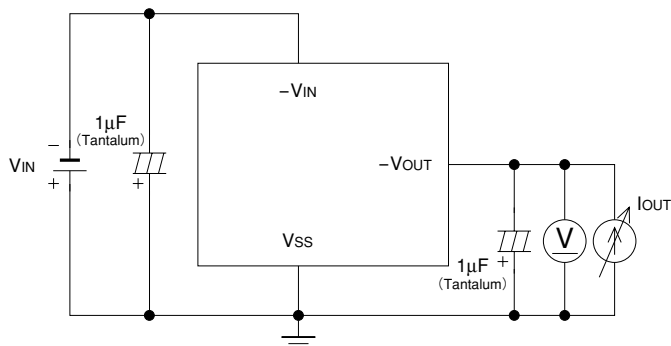









# Typical Performance Characteristics

## (1) OUTPUT VOLTAGE vs. OUTPUT CURRENT

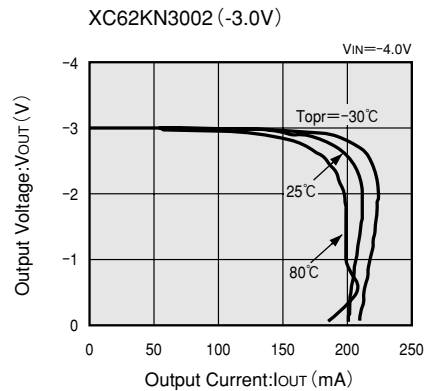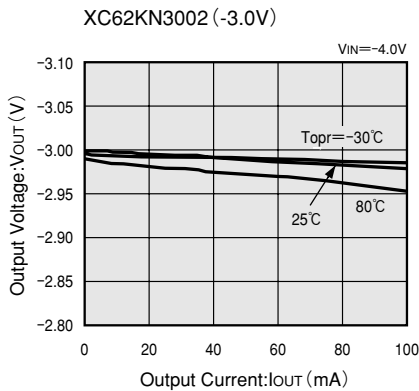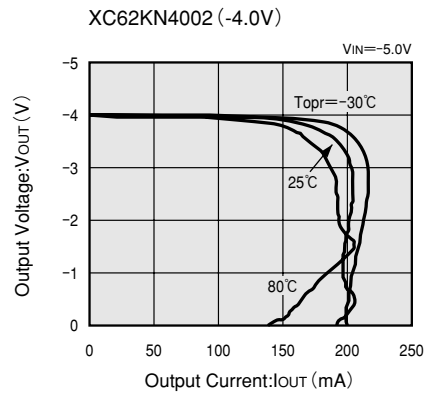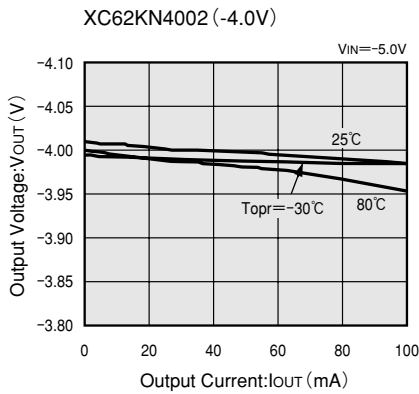
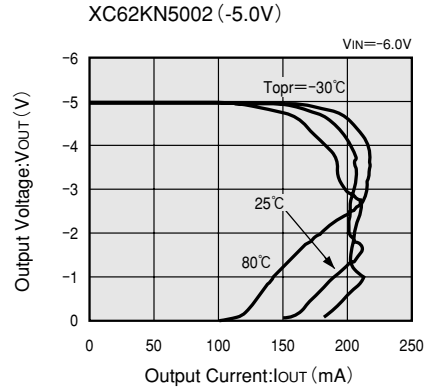
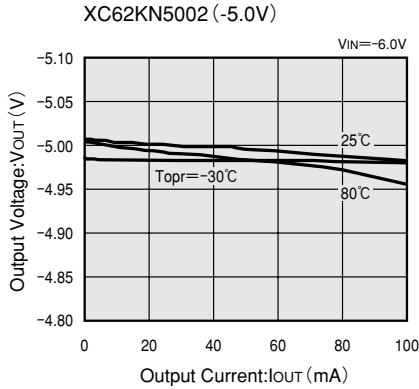


3







(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE

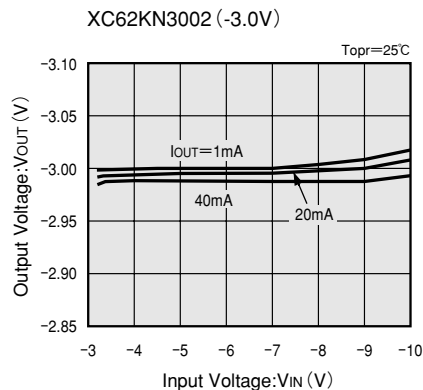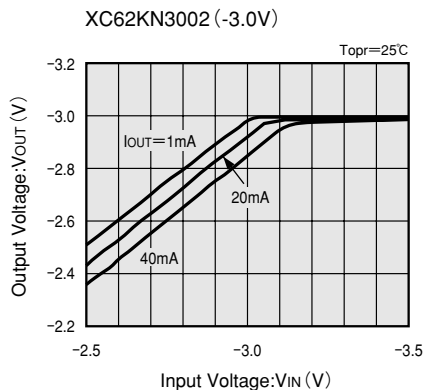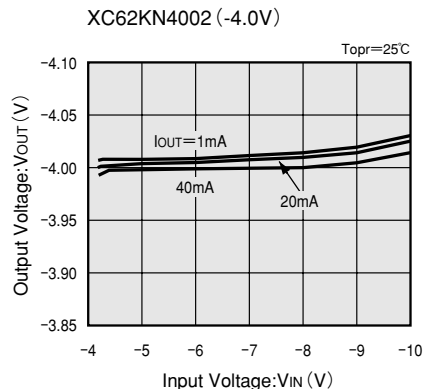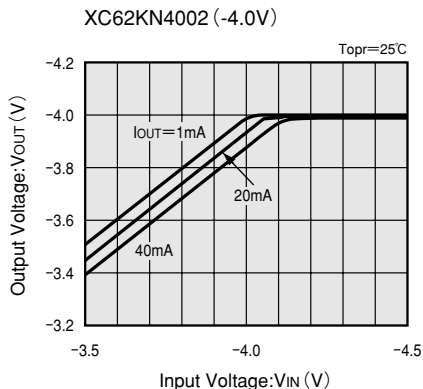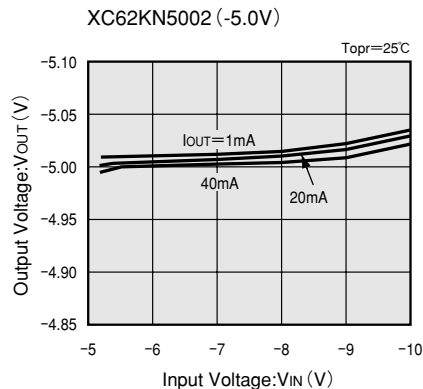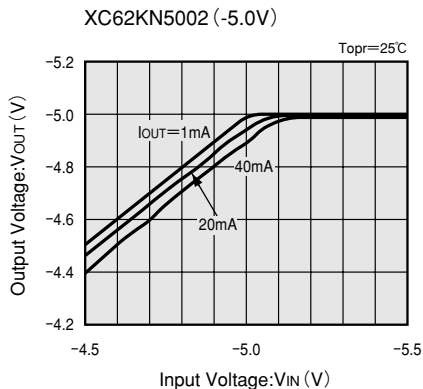

**(3) INPUT/OUTPUT VOLTAGE DIFFERENTIAL vs. OUTPUT CURRENT**

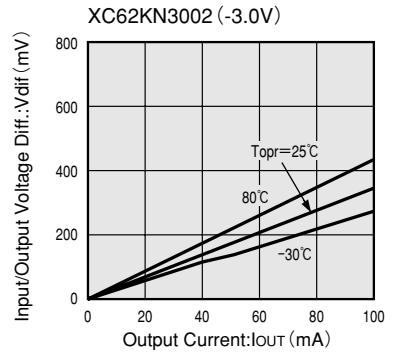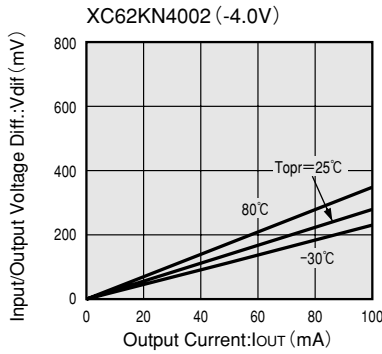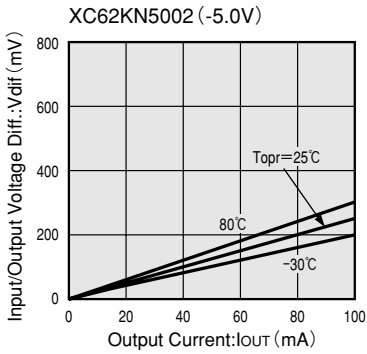


**(4) SUPPLY CURRENT vs. INPUT VOLTAGE**

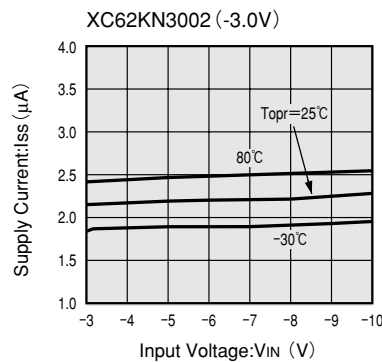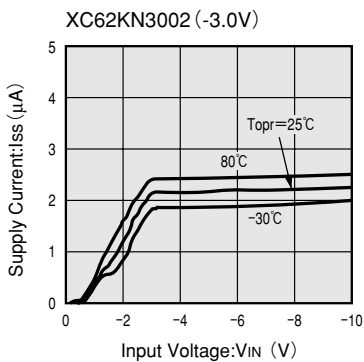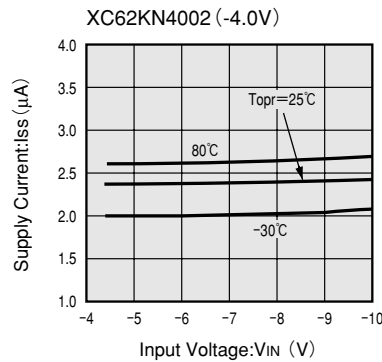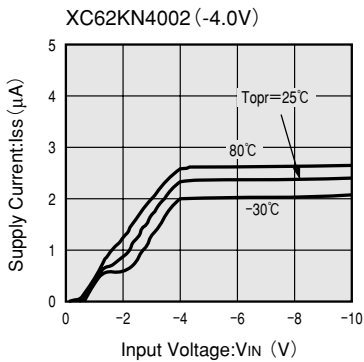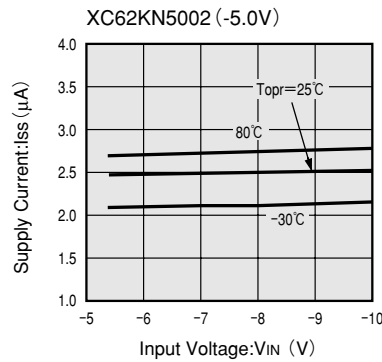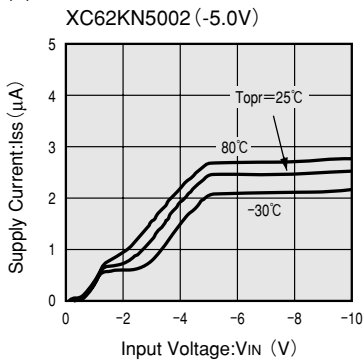


## (5) OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE


XC62KN5002 (-5.0V)

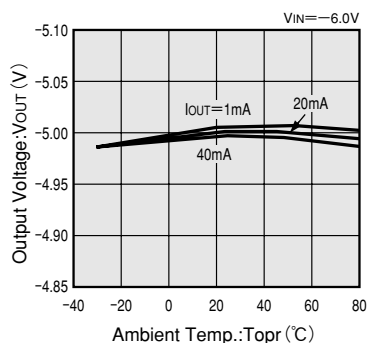

XC62KN4002 (-4.0V)

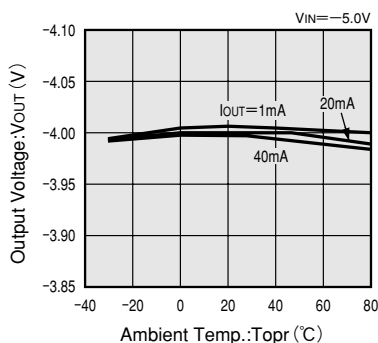


XC62KN3002 (-3.0V)

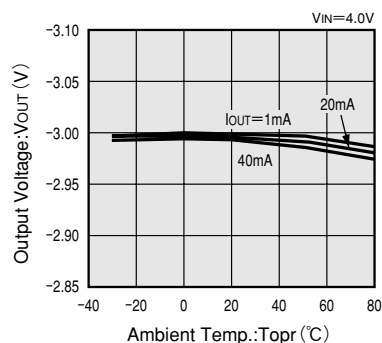


## (6) SUPPLY CURRENT vs. AMBIENT TEMPERATURE


XC62KN5002 (-5.0V)

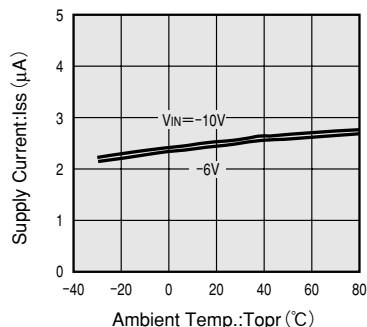

XC62KN4002 (-4.0V)

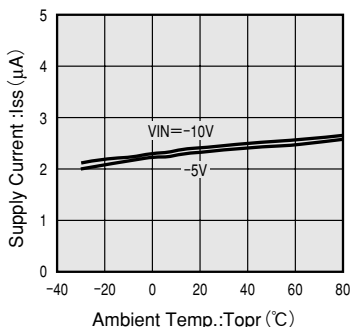


XC62KN3002 (-3.0V)

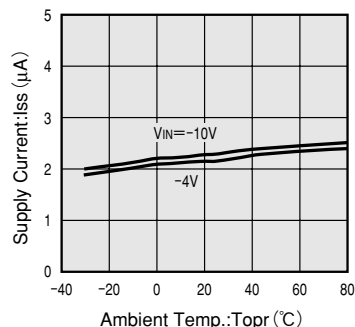


## (7) INPUT TRANSIENT RESPONSE 1


XC62KN5002 (-5.0V)

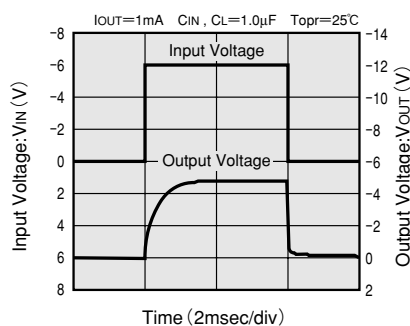


XC62KN5002 (-5.0V)

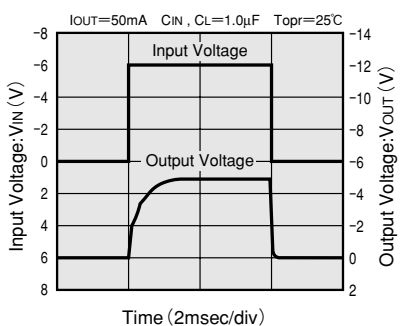


XC62KN5002 (-5.0V)

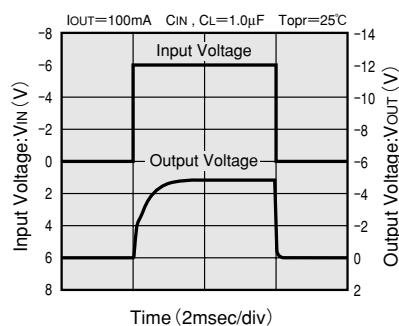


XC62KN4002 (-4.0V)

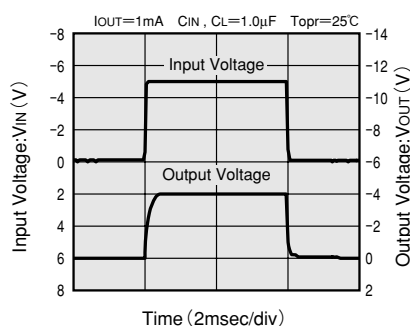


XC62KN4002 (-4.0V)

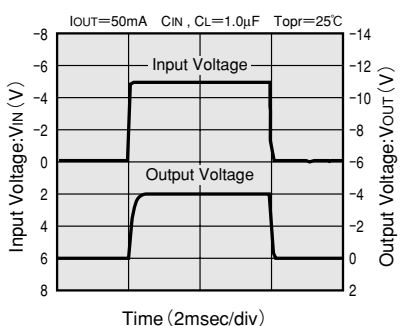


XC62KN4002 (-4.0V)

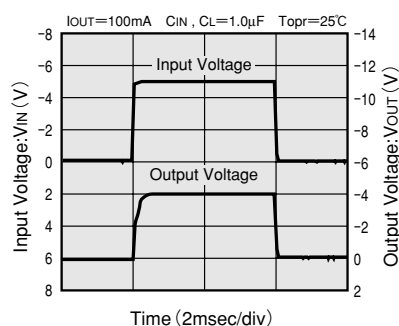


(7) INPUT TRANSIENT RESPONSE 1

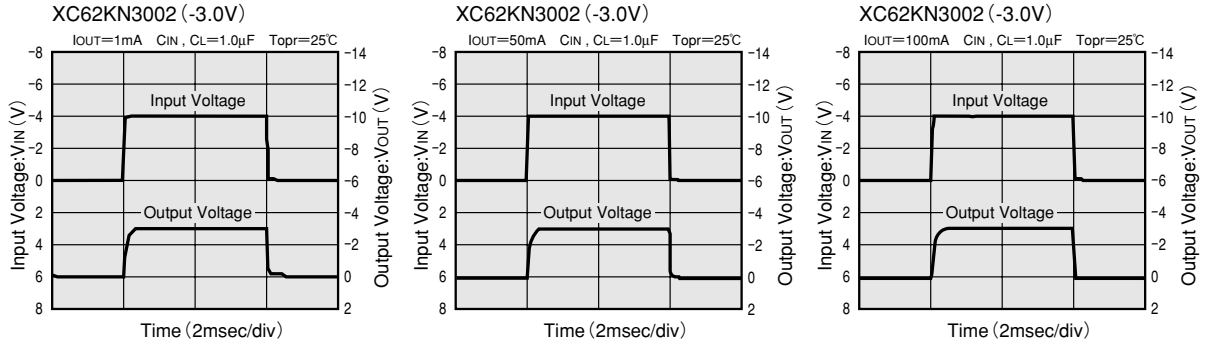

(8) INPUT TRANSIENT RESPONSE 2

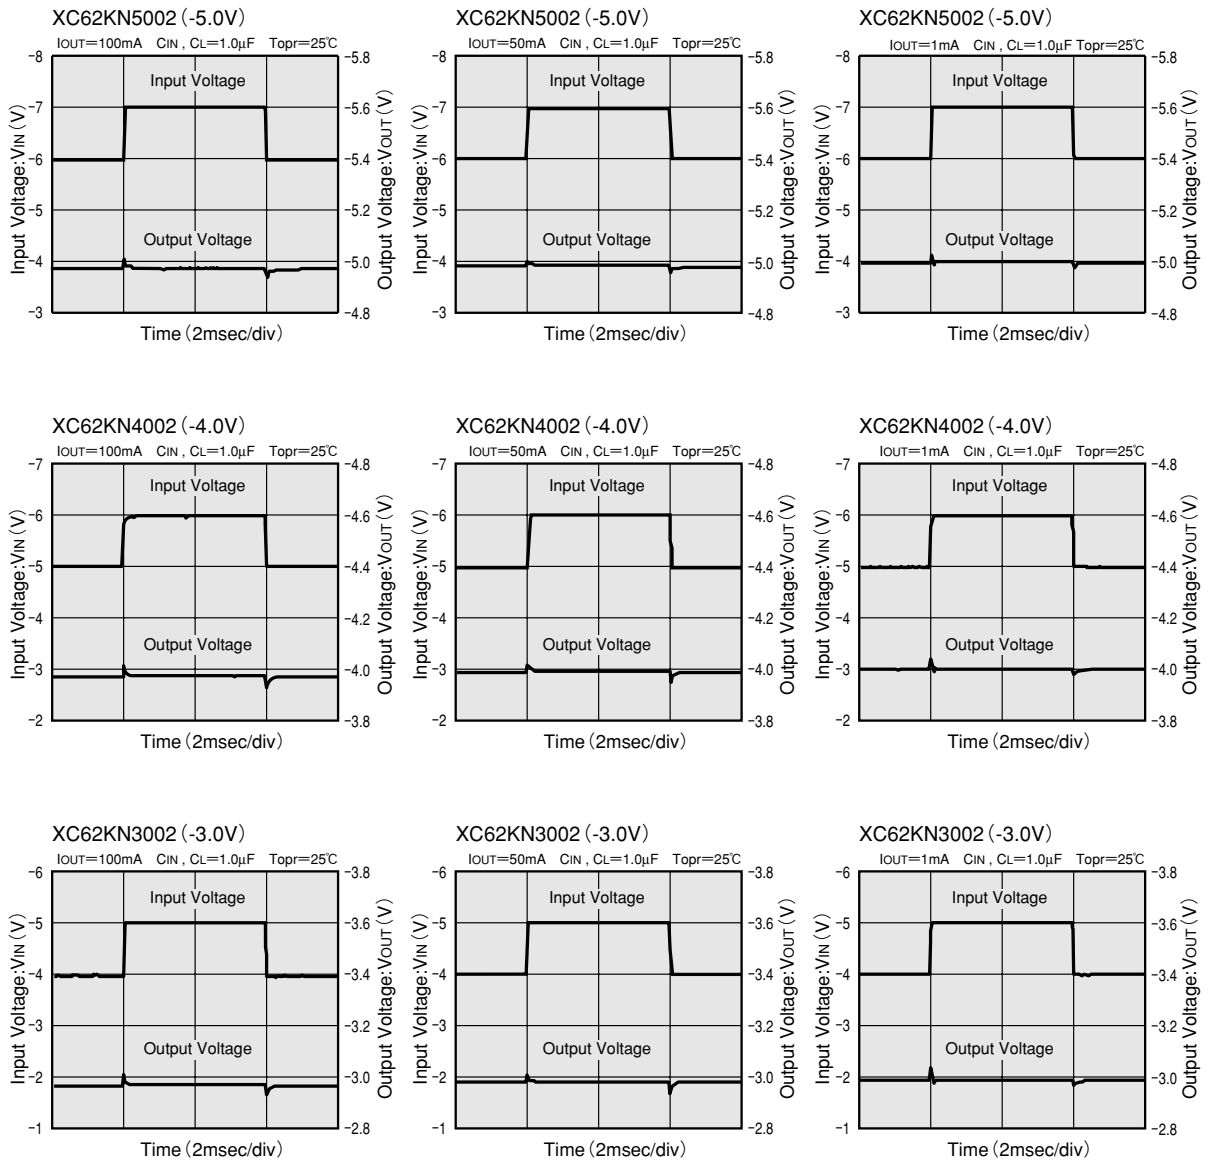

## (9) LOAD TRANSIENT RESPONSE

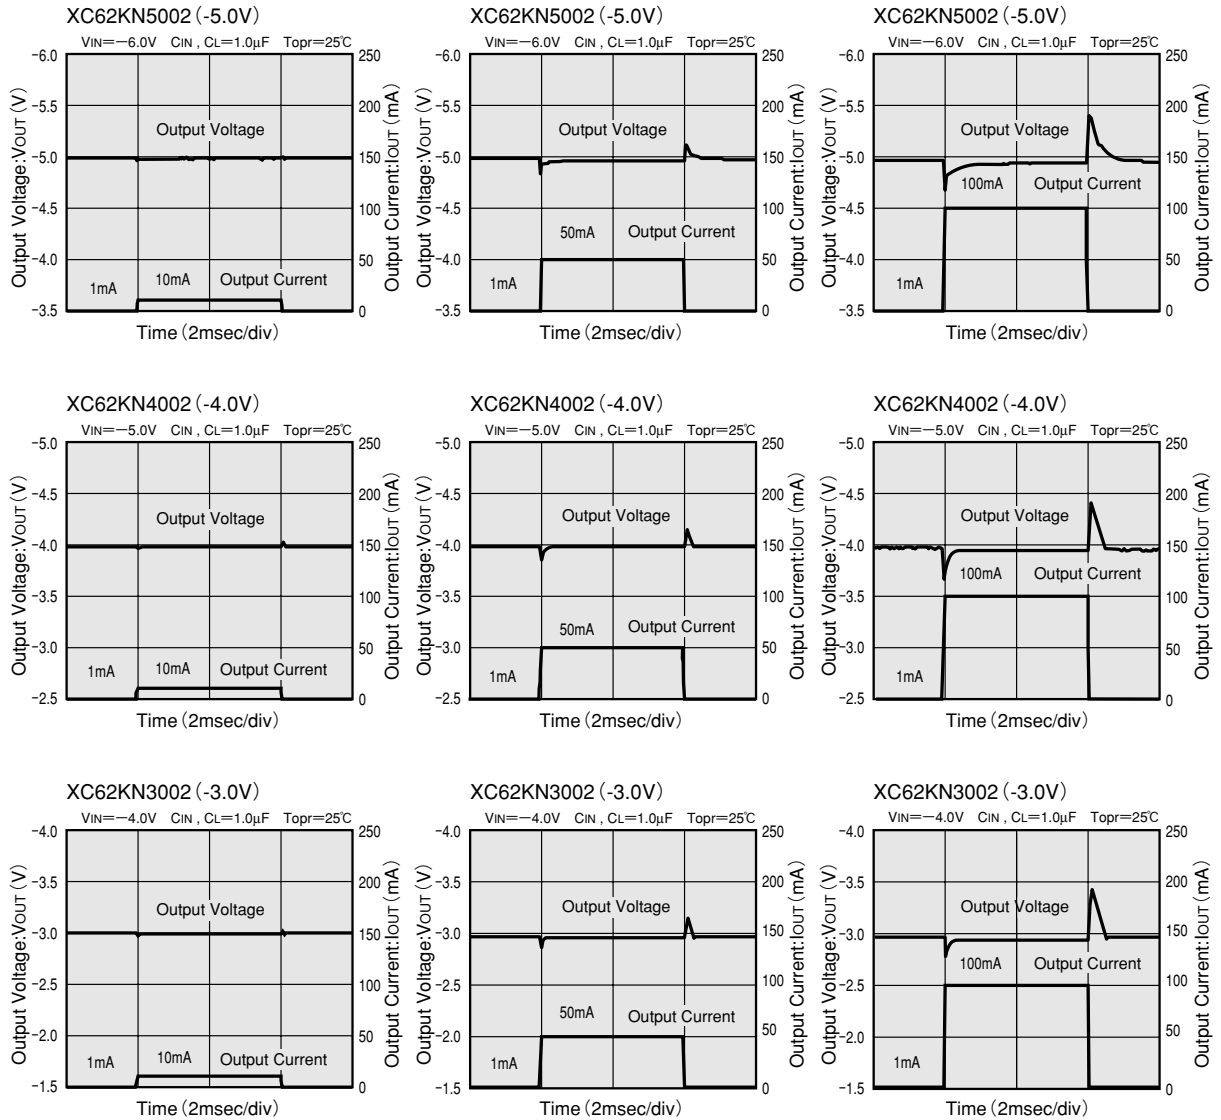

## (10) RIPPLE REJECTION RATE

