

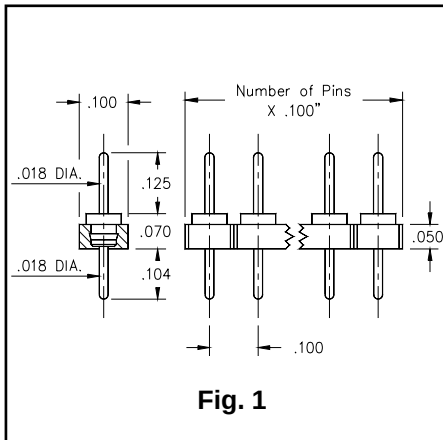
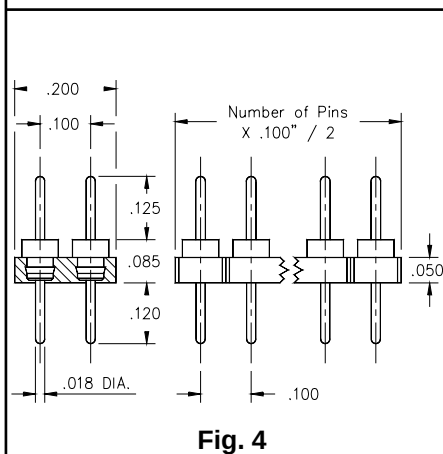
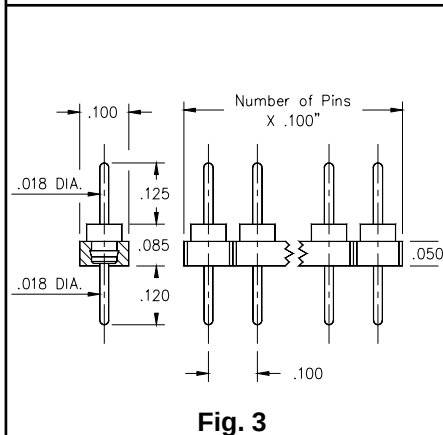


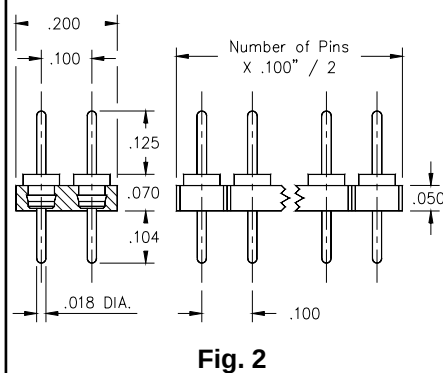

- Series 335 and 435 single and double row PCB interconnects offer lowest profile available .070".
- Series 364 and 464 single and double row PCB interconnects offer .085" profile above board.
- Series 335 and 435 use M-M# 3516 pins. (See page 170 for details)
- Series 364 and 464 use MM# 6458 pins. (See page 171 for details)
- Insulators are high temp. thermo-plastic.

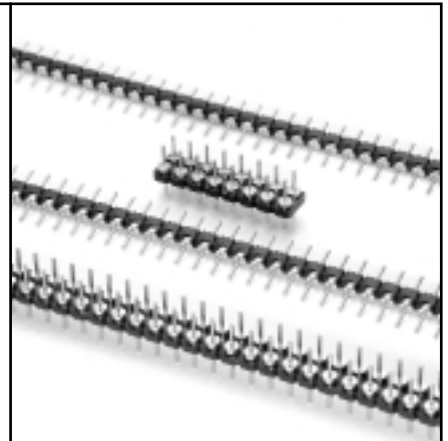

Ordering Information

Fig. 1	Single Row	.070" Profile Pin Header
	335-XX-1 _ _ -00-160 Specify # of pins → 01-32	
Fig. 2	Double Row	.070" Profile Pin Header
	435-XX-2 _ _ -00-160 Specify # of pins → 02-72	
Fig. 3	Single Row	.085" Profile Pin Header
	364-XX-1 _ _ -00-580 Specify # of pins → 01-32	
Fig. 4	Double Row	.085" Profile Pin Header
	464-XX-2 _ _ -00-580 Specify # of pins → 02-72	

XX= Plating Code
See Below

SPECIFY PLATING CODE XX=	10	90		
Pin Plating	10μ" Au	200μ" Sn/Pb		