

[illegible]

Operating temperature range at case, T_C -40°C to 85°C
Storage temperature range, T_{stg} -40°C to 85°C
Soldering temperature $t_{\text{max}}=10\text{ s}$,
2 mm distance from bottom edge of case, T_S 260°C

| | |
|---------------------------------------------|--------|
| Direct forward current, I_F max | 120 mA |
| Radiant power CW, $P_{F, \text{rad}}$ | 1 mW |
| Reverse Voltage, V_R | 2 V |

Reverse Voltage, V_R 10 V
Forward Current, I_F 2 mA

| | |
|-------------------------------------------------------|--------|
| Reverse Voltage, V_R | 10 V |
| Forward Current, I_F | 2 mA |
| Optical power into the optical port, P_{port} | 1.5 mW |

- Designed for application in passive-optical networks
- Integrated Wavelength Division Multiplexer (WDM)
- Bi-Directional Transmission in 2nd and 3rd optical window
- Single fiber solution
- FP-Laser Diode with Multi-Quantum Well structure
- Class 3B Laser Product
- Suitable for bit rates up to 1.25 Gbit/s
- Ternary Photodiode at rear mirror for monitoring and control of radiant power
- Low noise / high bandwidth PIN diode
- Hermetically sealed subcomponents, similar to TO 46
- With singlemode fiber pigtail


DESCRIPTION

The Infineon module for bidirectional optical transmission has been designed for different optical networks structures:

In the last few years the structure has changed from point to point planned for Broad band ISDN to a point to multipoint passive optical network (PON) architecture for the optical network in the subscriber loop.

A transceiver can be realized with discrete elements (Fig. 1). Transmitter and receiver with pigtails are connected with a fiber-coupler (2:1 or 2:2, wavelength independent or WDM).

Figure 1. Realization with discrete elements

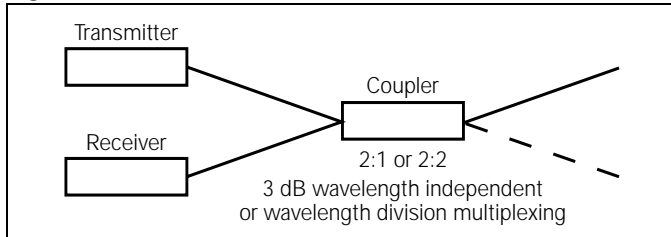


Infineon has realized this transceiver configuration in a compact module called a BIDI® (Fig. 2).

This module is especially suitable for separating the opposing signals at the ends of a link. It replaces a discrete solution with a transmitter, receiver and coupler.

The basic devices are a laser diode and a photodiode, each in a TO package, plus the filter in the beam path. A lens in the TO laser concentrates the light and enables it to be launched into the single-mode fiber of the module. In the same way the light from the fiber is focused onto the small, light-sensitive area of the photodiode to produce a high photo current. The mirror for coupling out the received signal is arranged in the beam so that the transmitter and receiver are at right angles to each other. This means the greatest possible degree of freedom in the layout of the electric circuit.

Figure 2. Compact realization of the transceiver in one module

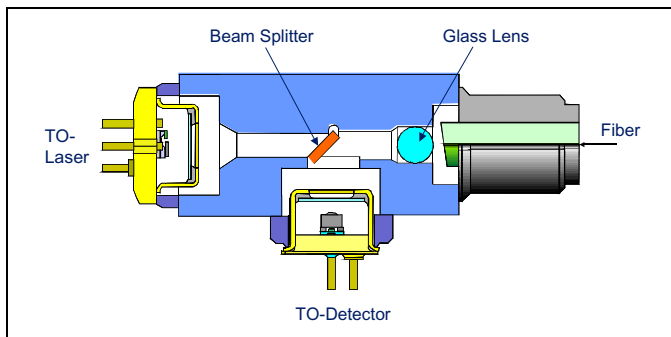

A decisive advantage of the module is its use of standard TO components. These devices, produced in large quantities, are hermetically sealed and tested before they are built in. This makes a very substantial contribution to the excellent reliability of the module. The solid metal package of the module serves the same purpose. It allows the use of modern laser welding techniques for reliable fixing of the different elements and the fiber holder.

TECHNICAL DATA

The electro-optical characteristics described in the following tables are only valid for use within the specified maximum ratings or under the recommended operating conditions.

Transmitter Electro-Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Units |
|--------------------------------------------------------------|--------------------------|------|------|------|---------------|
| Optical output power (maximum) | $P_{F, \max}$ | 0.4 | | | mW |
| Emission wavelength center of range $P_F=0.5 P_{F, \max}$ | λ_{trans} | 1270 | | 1350 | nm |
| Spectral width (RMS) | σ_λ | | | 5 | |
| Temperature coefficient of wavelength | TC | | | 0.5 | nm/K |
| Threshold current (whole temperature range) | I_{th} | 2 | | 45 | mA |
| Forward voltage $P_F=0.5 P_{F, \max}$ | V_F | | | 1.5 | V |
| Radiant power at I_{th} | P_{th} | | | 20 | μW |
| Slope efficiency (–40...85°C) | η | 8 | | 60 | mW/A |
| Variation of 1st derivative of P/I (0.05 to 0.4 mW) | S_{var} | –30 | | 30 | % |
| Differential series resistance | R_S | | | 8 | Ω |
| Rise time (10%–90%) | t_r | | 100 | 200 | ps |
| Fall time (10%–90%) | t_f | | 270 | 500 | |

Monitor Diode Electro-Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Units |
|----------------------------------------------------------------|--------|------|------|------|---------------|
| Dark current, $V_R=5 \text{ V}$, $P_F=0$, $T=T_{\text{max}}$ | I_R | | | 200 | nA |
| Photocurrent, $V_R=5 \text{ V}$, $P_F=0.5 P_{F, \max}$ | I_P | 50 | | 1500 | μA |
| Capacitance, $V_R=5 \text{ V}$, $f=1 \text{ MHz}$ | C_5 | | | 10 | pF |
| Tracking error ⁽¹⁾ , $V_R=5 \text{ V}$ | TE | –1 | | 1 | dB |

Note

- The tracking error TE is the maximum deviation of P_F at constant current I_{mon} over a specified temperature range and relative to the reference point: $I_{\text{mon,ref}}=I_{\text{mon}} (T=25^\circ\text{C}, P_F=0.5 P_{F, \max})$. Thus, TE is given by:

$$\text{TE [dB]} = 10 \times \log \frac{P_F [T_c]}{P_F [25^\circ\text{C}]}$$

Receiver Diode Electro-Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Units |
|----------------------------------------------------------------------------------|------------------|------|------|------|-------|
| Spectral sensitivity $V_R=5\text{ V}$, $\lambda=1550\text{ nm}$ | S_{rec} | 0.65 | | 1 | A/W |
| Rise and fall time (10%–90%) $R_L=50\ \Omega$, $V_R=5\text{ V}$ | t_r ; t_f | | | 1 | ns |
| Total capacitance $V_R=5\text{ V}$, $P_{\text{opt}}=0$, $f=1\text{ MHz}$ | C | | | 1.5 | pF |
| Dark current $V_R=5\text{ V}$, $P_{\text{opt}}=0$ | I_D | | | 50 | nA |

Module Electro-Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Units |
|----------------------------------|--------|------|------|------|-------|
| Optical Crosstalk ⁽¹⁾ | CRT | | | –47 | dB |

Note

- Optical Crosstalk is defined as

$$\text{CRT [dB]} = 10 \times \log \frac{I_{\text{Det},0}}{I_{\text{Det},1}}$$

with:

$I_{\text{Det},0}$: the photocurrent with $P_F=0.5\text{ P}_{F, \text{max.}}$ without optical input, CW laser operation, $V_R=2\text{ V}$ and

$I_{\text{Det},1}$: the photocurrent without P_F but $0.5\text{ P}_{F, \text{max.}}$ optical input power, $\lambda=1550\text{ nm}$.

End of Life Time Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Units |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------|------|------|---------------|
| Threshold current at $T=T_{\text{max}}$ | I_{th} | | | 60 | mA |
| Current above threshold, over full temperature range, at $I_{\text{mon,ref}}=I_{\text{mon}}$ ($T=25^\circ\text{C}$, $P_F=0.5\text{ P}_{F, \text{max.}}$ BOL) | ΔI_F | 7 | | 70 | |
| Tracking Error | TE | –1.5 | | 1.5 | dB |
| Detector Dark Current, $V_R=2\text{ V}$, $T=T_{\text{max}}$ | I_R | | | 400 | nA |
| Monitor Dark Current, $V_R=2\text{ V}$, $T=T_{\text{max}}$ | I_R | | | 1 | μA |

FIBER DATA

The mechanical fiber characteristics are described in the following table.

Fiber Characteristics

| Parameter | Min. | Typ. | Max. | Units |
|-----------------------------------------|------|------|------|---------------|
| Mode Field Diameter | 8 | 9 | 10 | μm |
| Cladding Diameter | 123 | 125 | 127 | |
| Mode Field/Cladding Concentricity Error | | | 1 | |
| Cladding Non-circularity | | | 2 | % |
| Mode Field Non-circularity | | | 6 | |
| Cut off Wavelength | 1270 | | | nm |
| Jacket Diameter | 0.8 | | 1 | mm |
| Bending Radius | 30 | | | |
| Tensile Strength Fiber Case | 5 | | | N |
| Length | 0.8 | | 1.2 | m |

Pin Description


| | Pinning (bottom view) | Pin Description |
|-------------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------|
| Transmitter | | |
| | | <p>Pinning 1 (on request)</p> <p>Pinning 2 (Standard)</p> |
| Receiver | | |
| | | <p>Pinning 1 (Standard)</p> <p>Pinning 2 (on request)</p> |
| Available Pinnings | | |
| Type | Transmitter | Receiver |
| SBL52414x | 2 (Standard) | 1 (Standard) |
| SBL51414x | 1 (on request) | 1 (on request) |
| Other Pinnings on request / different drawing set required for non standard pinning | | |

EYE SAFETY

Ensure to avoid exposure of human eyes to high power laser diode emitted laser beams. Especially do not look directly into the laser diode or the collimated laser beam when the diode is activated.

CLASS 3B LASER PRODUCT according to IEC 60825-1

Required Labels

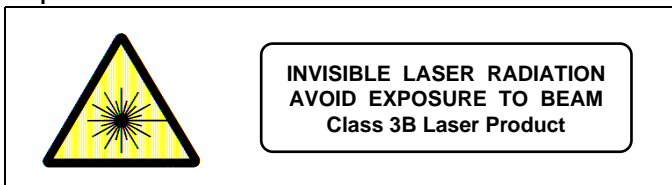

Class IIb LASER PRODUCT according to FDA Regulations
complies with 21 CFR 1040.10 and 1040.11

Required Label



Laser Data

| | |
|-------------------------------------|-----------------|
| Wavelength | 1310 nm |
| Maximum total output power | less than 50 mW |
| Beam divergence (1/e ²) | 10° |

CONNECTOR OPTIONS

| Model | Type |
|------------------------|----------------------|
| SBL52414G SBL51414G | SM FC/PC |
| SBL52414N SBL51414N | SM SC/PC 0° |
| SBL52414Z SBL51414Z | SM without connector |

Published by Infineon Technologies AG

© Infineon Technologies AG 2002
All Rights Reserved

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.
Terms of delivery and rights to technical change reserved.
We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.
Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact the Infineon Technologies offices or our Infineon Technologies Representatives worldwide - see our webpage at www.infineon.com/fiberoptics

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your Infineon Technologies offices.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.