

INTRODUCTION:

Adam Tech MHR Series .100" Latch Headers are dual row, PCB mounted, shrouded headers with latches for use with dual row IDC female socket connectors. In addition to providing a shock and vibration proof connection the locking latches also act as ejectors to remove the mating socket. Our low profile, space saving design has a center slot for the socket's polarization bump. Adam Tech's Latch Headers are available in Straight PCB Mount, Right Angle PCB and SMT Mounting. Plating options include choice of Gold, Tin or Selective Gold

FEATURES:

Integral Latches provide Shock and Vibration Proof connection
Slot for IDC socket Polarization bump
Straight PCB, Right Angle PCB and SMT versions
Gold, Tin or Selective Gold plating
Elevated option available
Hi-Temp insulator available

MATING SOCKETS:

.100" X .100" Dual row IDC sockets

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL94V-0

Insulator Color: Black (Gray optional)

Contacts: Brass

Plating:

U = Gold flash (30u" optional) over nickel underplate overall

SG = Gold flash (30u" optional) over nickel on contact area,
Tin over copper underplate on tails.

T = Tin over copper underplate overall

Electrical:

Operating voltage: 250V AC max.

Current rating: 3 Amps max

Contact resistance: 20 mΩ max. initial

Insulation resistance: 5000 MΩ min.

Dielectric withstanding voltage: 1000V AC for 1 minute

Mechanical:

Mating durability: 500 Cycles min.

Temperature Rating:

Operating temperature: -55°C to +105°C


PACKAGING:

Anti-ESD plastic trays


SAFETY AGENCY APPROVALS:

UL Recognized File No. E224053

CSA Certified File No. LR1578596

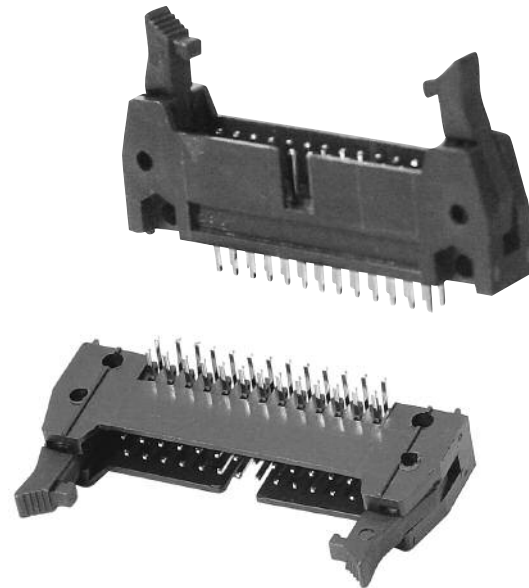

ORDERING INFORMATION

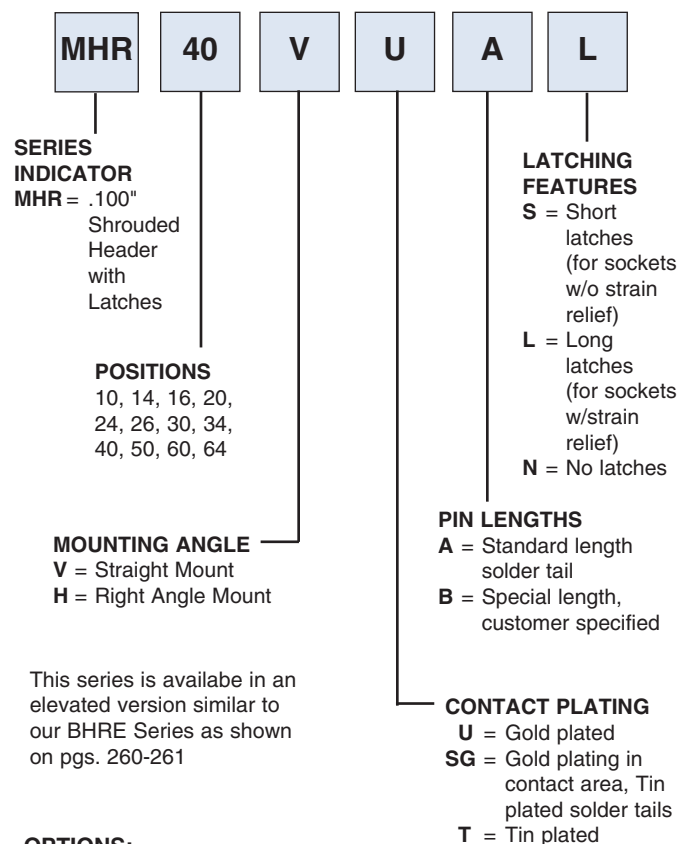

This series is available in an elevated version similar to our BHRE Series as shown on pgs. 260-261

OPTIONS:

Add designator(s) to end of part number

GY = Gray color insulator

HT = High-temp insulator for high-temp soldering processes