


## MECHANICAL DATA

Dimensions in mm

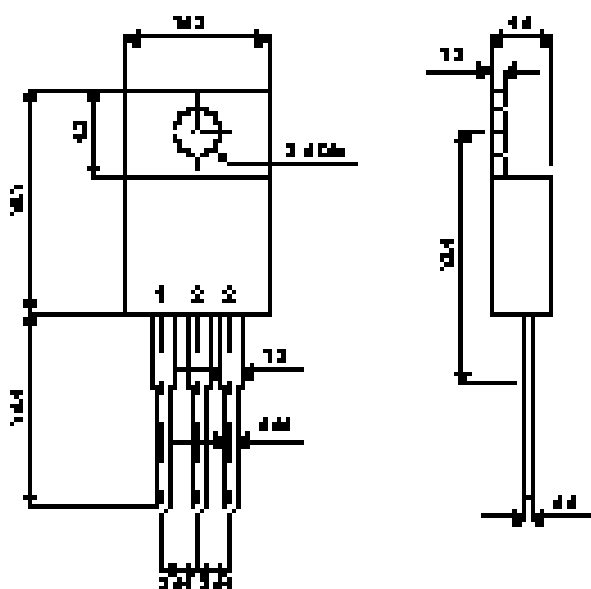

### TO220

Pin 1 – Base      Pad 2 – Collector      Pad 3 – Emitter

## NPN FAST SWITCHING TRANSISTOR

### FEATURES

- LOW SATURATION VOLTAGE
- ULTRA FAST TURN-ON AND TURN-OFF SWITCHING ( $t_r / t_f = 40\text{ns}$ )

### APPLICATIONS

- High speed TO220 transistor suited for low voltage applications.
- High frequency and high efficiency converters, switching regulators and motor controls.
- Ideally suited for 12V and 24V inverters.

## ABSOLUTE MAXIMUM RATINGS ( $T_{\text{case}} = 25^\circ\text{C}$ unless otherwise stated)

|                  |                                                           |                              |
|------------------|-----------------------------------------------------------|------------------------------|
| $V_{\text{CBO}}$ | Collector – Base Voltage                                  | 200V                         |
| $V_{\text{CEO}}$ | Collector – Emitter Voltage ( $I_B = 0$ )                 | 100V                         |
| $V_{\text{EBO}}$ | Emitter – Base Voltage ( $I_C = 0$ )                      | 7V                           |
| $I_C$            | Collector Current                                         | 14A                          |
| $I_B$            | Base Current                                              | 4A                           |
| $P_{\text{tot}}$ | Total Dissipation at $T_{\text{case}} = 25^\circ\text{C}$ | 85W                          |
| $T_{\text{stg}}$ | Storage Temperature Range                                 | $-55$ to $175^\circ\text{C}$ |
| $R_{\text{th}}$  | Thermal Resistance Junction – Case                        | $175^\circ\text{C/W}$        |

**ELECTRICAL CHARACTERISTICS** ( $T_{\text{case}} = 25^{\circ}\text{C}$  unless otherwise stated)

| Parameter                                                      | Test Conditions                                                          | Min.                                             | Typ. | Max. | Unit |    |
|----------------------------------------------------------------|--------------------------------------------------------------------------|--------------------------------------------------|------|------|------|----|
| ELECTRICAL CHARACTERISTICS                                     |                                                                          |                                                  |      |      |      |    |
| V <sub>CEO(sus)</sub> * Collector – Emitter Sustaining Voltage | I <sub>C</sub> = 200mA                                                   | 100                                              |      |      | V    |    |
| V <sub>(BR)EBO</sub> * Emitter – Base Breakdown Voltage        | I <sub>E</sub> = 1mA                                                     | 7                                                |      |      |      |    |
| I <sub>CER</sub> * Collector Cut–Off Current                   | I <sub>B</sub> = 0<br>R <sub>BE</sub> = 50Ω                              | V <sub>CE</sub> = 200V<br>T <sub>C</sub> = 125°C |      | 3    | mA   |    |
| I <sub>CBO</sub> * Collector – Base Cut–Off Current            | I <sub>E</sub> = 0<br>V <sub>BE</sub> = –1.5V                            | V <sub>CB</sub> = 200V<br>T <sub>C</sub> = 125°C |      | 1    | mA   |    |
| I <sub>EBO</sub> * Emitter Cut–Off Current                     | I <sub>C</sub> = 0                                                       | V <sub>EB</sub> = 5V                             |      | 1    | mA   |    |
| V <sub>CE(sat)</sub> * Collector – Emitter Saturation Voltage  | I <sub>C</sub> = 5A                                                      | I <sub>B</sub> = 500mA                           |      | 0.6  | V    |    |
|                                                                | I <sub>C</sub> = 10A                                                     | I <sub>B</sub> = 1A                              |      | 1.5  |      |    |
| V <sub>BE(sat)</sub> * Base – Emitter Saturation Voltage       | I <sub>C</sub> = 10A                                                     | I <sub>B</sub> = 1A                              |      | 2    | V    |    |
| SWITCHING CHARACTERISTICS (resistive load)                     |                                                                          |                                                  |      |      |      |    |
| t <sub>on</sub> Turn–On Time                                   | V <sub>CC</sub> = 50V                                                    | I <sub>C</sub> = 12A                             |      | 0.2  | 0.6  | μS |
| t <sub>s</sub> Storage Time                                    | V <sub>BE</sub> = –6V                                                    | I <sub>B1</sub> = 1.2A                           |      | 0.4  | 1    |    |
| t <sub>f</sub> Fall Time                                       | R <sub>BB</sub> = 2.5Ω                                                   |                                                  |      | 0.04 | 0.25 |    |
| SWITCHING CHARACTERISTICS (inductive load)                     |                                                                          |                                                  |      |      |      |    |
| t <sub>s</sub> Storage Time                                    | V <sub>CC</sub> = 50V<br>V <sub>BE</sub> = –5V<br>L <sub>B</sub> = 0.5μH | I <sub>C</sub> = 12A<br>I <sub>B1</sub> = 1.2A   |      | 0.5  |      | μS |
| t <sub>f</sub> Fall Time                                       |                                                                          |                                                  |      | 0.04 |      |    |
| t <sub>s</sub> Storage Time (T <sub>j</sub> = 125°C)           |                                                                          |                                                  |      |      | 2    |    |
| t <sub>f</sub> Fall Time (T <sub>j</sub> = 125°C)              |                                                                          |                                                  |      |      | 0.15 |    |

\* Pulse test  $t_{\text{p}} = 300\mu\text{s}$  ,  $\delta \leq 2\%$