

# TLC139, TLC339, TLC339Q LinCMOS™ MICROPOWER QUAD COMPARATORS

SLCS119 – DECEMBER 1986 – REVISED JANUARY 1991


- Very Low Power . . . 200  $\mu$ W Typ at 5 V
- Fast Response Time . . . 2.5  $\mu$ s Typ With 5-mV Overdrive
- Single Supply Operation:  
TLC139M . . . 4 V to 16 V  
TLC339M . . . 4 V to 16 V  
TLC339C . . . 3 V to 16 V  
TLC339I . . . 3 V to 16 V
- High Input Impedance . . .  $10^{12} \Omega$  Typ
- Input Offset Voltage Change at Worst Case Input at Condition Typically 0.23  $\mu$ V/Month Including the First 30 Days
- On-Chip ESD Protection

## description


The TLC139/TLC339 consists of four independent differential-voltage comparators designed to operate from a single supply. It is functionally similar to the LM139/LM339 family but uses 1/20th the power for similar response times. The open-drain MOS output stage interfaces to a variety of leads and supplies, as well as wired logic functions. For a similar device with a push-pull output configuration, see the TLC3704 data sheet.

The Texas Instruments LinCMOS™ process offers superior analog performance to standard CMOS processes. Along with the standard CMOS advantages of low power without sacrificing speed, high input impedance, and low bias currents, the LinCMOS™ process offers extremely stable input offset voltages, even with differential input stresses of several volts. This characteristic makes it possible to build reliable CMOS comparators.

D, J OR N PACKAGE  
(TOP VIEW)



FK PACKAGE  
(TOP VIEW)

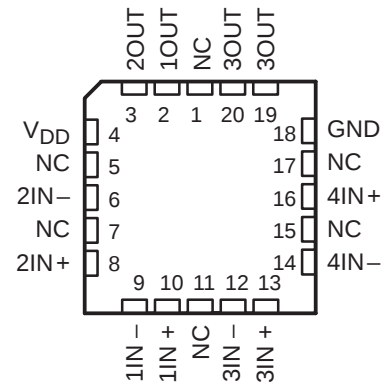

NC – No internal connection

## symbol (each comparator)



## AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGE              |                      |                    |                    |
|----------------|--------------------------------|----------------------|----------------------|--------------------|--------------------|
|                |                                | SMALL OUTLINE<br>(D) | CHIP CARRIER<br>(FK) | CERAMIC DIP<br>(J) | PLASTIC DIP<br>(P) |
| 0°C to 70°C    | 5 mV                           | TLC339CD             | —                    | —                  | TLC339CN           |
| –40°C to 85°C  | 5 mV                           | TLC339ID             | —                    | —                  | TLC339IN           |
| –40°C to 125°C | 5 mV                           | TLC339QD             | —                    | —                  | TLC339QN           |
| –55°C to 125°C | 5 mV                           | TLC339MD             | TLC139MFK            | TLC139MJ           | TLC339MN           |

The D package is available taped and reeled. Add the suffix R to the device type (e.g., TLC339CDR).

LinCMOS is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1991, Texas Instruments Incorporated


TLC139, TLC339, TLC339Q
LinCMOS™ MICROPOWER QUAD COMPARATORS

SLCS119 – DECEMBER 1986 – REVISED JANUARY 1991

description (continued)

The TLC139M and TLC339M are characterized for operation over the full military temperature range of –55°C to 125°C. The TLC339C is characterized for operation over the commercial temperature range of 0°C to 70°C. The TLC339I is characterized for operation over the industrial temperature range of –40°C to 85°C. The TLC339Q is characterized for operation over the extended industrial temperature range of –40°C to 125°C.

output schematic

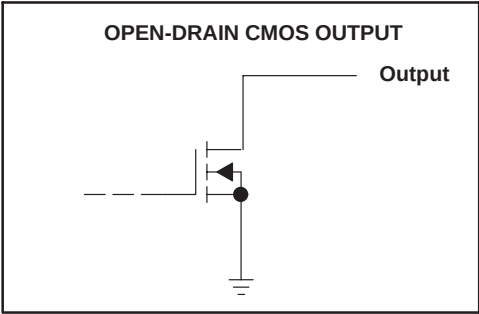

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Table with 2 columns: Parameter and Rating. Parameters include Supply voltage range, Differential input voltage, Input voltage range, Output voltage range, Input current, Output current, Total supply current into VDD, Total current out of GND, Continuous total dissipation, and Operating free-air temperature range for various device types (TLC139M, TLC339C, TLC339I, TLC339M, TLC339Q). Storage temperature range, Case temperature for 60 seconds, and Lead temperature for 10 and 60 seconds are also listed.

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential voltages, are with respect to network ground.
2. Differential voltages are at IN+ with respect to IN –.

DISSIPATION RATING TABLE

Table with 6 columns: PACKAGE, TA ≤ 25°C POWER RATING, DERATING FACTOR ABOVE TA = 25°C, TA = 70°C POWER RATING, TA = 85°C POWER RATING, TA = 125°C POWER RATING. Rows are listed for packages D, FK, J, and N.

# TLC139, TLC339, TLC339Q

## LinCMOS™ MICROPOWER QUAD COMPARATORS

SLCS119 – DECEMBER 1986 – REVISED JANUARY 1991

### recommended operating conditions

|                                       | TLC139M, TLC339M |     |              | UNIT |
|---------------------------------------|------------------|-----|--------------|------|
|                                       | MIN              | NOM | MAX          |      |
| Supply voltage, $V_{DD}$              | 4                | 5   | 16           | V    |
| Common-mode input voltage, $V_{IC}$   | 0                |     | $V_{DD}-1.5$ | V    |
| Low-level output current, $I_{OL}$    |                  |     | 20           | mA   |
| Operating free-air temperature, $T_A$ | -55              |     | 125          | °C   |

### electrical characteristics at specified operating free-air temperature, $V_{DD} = 5$ V (unless otherwise noted)

| PARAMETER |                                   | TEST CONDITIONS†                      | $T_A$          | TLC139M, TLC339M |                   |     | UNIT |
|-----------|-----------------------------------|---------------------------------------|----------------|------------------|-------------------|-----|------|
|           |                                   |                                       |                | MIN              | TYP               | MAX |      |
| $V_{IO}$  | Input offset voltage              | $V_{IC} = V_{ICRmin}$ ,<br>See Note 3 | 25°C           |                  | 1.4               | 5   | mV   |
|           |                                   |                                       | -55°C to 125°C |                  |                   | 10  |      |
| $I_{IO}$  | Input offset current              | $V_{IC} = 2.5$ V                      | 25°C           |                  | 1                 |     | pA   |
|           |                                   |                                       | 125°C          |                  |                   | 15  | nA   |
| $I_{IB}$  | Input bias current                | $V_{IC} = 2.5$ V                      | 25°C           |                  | 5                 |     | pA   |
|           |                                   |                                       | 125°C          |                  |                   | 30  | nA   |
| $V_{ICR}$ | Common-mode input voltage range   |                                       | 25°C           |                  | 0 to $V_{DD}-1$   |     | V    |
|           |                                   |                                       | -55°C to 125°C |                  | 0 to $V_{DD}-1.5$ |     |      |
| CMRR      | Common-mode rejection ratio       | $V_{IC} = V_{ICRmin}$                 | 25°C           |                  | 84                |     | dB   |
|           |                                   |                                       | 125°C          |                  | 84                |     |      |
|           |                                   |                                       | -55°C          |                  | 84                |     |      |
| $k_{SVR}$ | Supply-voltage rejection ratio    | $V_{DD} = 5$ V to 10 V                | 25°C           |                  | 85                |     | dB   |
|           |                                   |                                       | 125°C          |                  | 84                |     |      |
|           |                                   |                                       | -55°C          |                  | 84                |     |      |
| $V_{OL}$  | Low-level output voltage          | $V_{ID} = -1$ V, $I_{OL} = 6$ mA      | 25°C           |                  | 300               | 400 | mV   |
|           |                                   |                                       | 125°C          |                  |                   | 800 |      |
| $I_{OH}$  | High-level output current         | $V_{ID} = -1$ V, $V_O = 5$ V          | 25°C           |                  | 0.8               | 40  | nA   |
|           |                                   |                                       | 125°C          |                  |                   | 1   | μA   |
| $I_{DD}$  | Supply current (four comparators) | Outputs low, No load                  | 25°C           |                  | 44                | 80  | μA   |
|           |                                   |                                       | -55°C to 125°C |                  |                   | 175 |      |

† All characteristics are measured with zero common-mode voltage unless otherwise noted.

NOTE 3: The offset voltage limits given are the maximum values required to drive the output up to 4.5 V or down to 0.3 V with a 2.5-kΩ load to  $V_{DD}$ .

# TLC139, TLC339, TLC339Q

## LinCMOS™ MICROPOWER QUAD COMPARATORS

SLCS119 – DECEMBER 1986 – REVISED JANUARY 1991

### recommended operating conditions

|                                       | TLC339C |     |              | UNIT |
|---------------------------------------|---------|-----|--------------|------|
|                                       | MIN     | NOM | MAX          |      |
| Supply voltage, $V_{DD}$              | 3       | 5   | 16           | V    |
| Common-mode input voltage, $V_{IC}$   | -0.2    |     | $V_{DD}-1.5$ | V    |
| Low-level output current, $I_{OL}$    |         | 8   | 20           | mA   |
| Operating free-air temperature, $T_A$ | 0       |     | 70           | °C   |

### electrical characteristics at specified operating free-air temperature, $V_{DD} = 5$ V (unless otherwise noted)

| PARAMETER |                                   | TEST CONDITIONS†                      | $T_A$                                          | TLC339C |                   |     | UNIT |
|-----------|-----------------------------------|---------------------------------------|------------------------------------------------|---------|-------------------|-----|------|
|           |                                   |                                       |                                                | MIN     | TYP               | MAX |      |
| $V_{IO}$  | Input offset voltage              | $V_{IC} = V_{ICRmin}$ ,<br>See Note 3 | $V_{DD} = 5$ V to 10 V,<br>25°C<br>0°C to 70°C |         | 1.4               | 5   | mV   |
|           |                                   |                                       |                                                |         |                   | 6.5 |      |
| $I_{IO}$  | Input offset current              | $V_{IC} = 2.5$ V                      | 25°C                                           |         | 1                 |     | pA   |
|           |                                   |                                       | 70°C                                           |         |                   | 0.3 | nA   |
| $I_{IB}$  | Input bias current                | $V_{IC} = 2.5$ V                      | 25°C                                           |         | 5                 |     | pA   |
|           |                                   |                                       | 70°C                                           |         |                   | 0.6 | nA   |
| $V_{ICR}$ | Common-mode input voltage range   |                                       | 25°C                                           |         | 0 to $V_{DD}-1$   |     | V    |
|           |                                   |                                       | 0°C to 70°C                                    |         | 0 to $V_{DD}-1.5$ |     |      |
| CMRR      | Common-mode rejection ratio       | $V_{IC} = V_{ICRmin}$                 | 25°C                                           |         | 84                |     | dB   |
|           |                                   |                                       | 70°C                                           |         | 84                |     |      |
|           |                                   |                                       | 0°C                                            |         | 84                |     |      |
| $k_{SVR}$ | Supply-voltage rejection ratio    | $V_{DD} = 5$ V to 10 V                | 25°C                                           |         | 85                |     | dB   |
|           |                                   |                                       | 70°C                                           |         | 85                |     |      |
|           |                                   |                                       | 0°C                                            |         | 85                |     |      |
| $V_{OL}$  | Low-level output voltage          | $V_{ID} = -1$ V,<br>$I_{OL} = 6$ mA   | 25°C                                           |         | 300               | 400 | mV   |
|           |                                   |                                       | 70°C                                           |         |                   | 650 |      |
| $I_{OH}$  | High-level output current         | $V_{ID} = -1$ V,<br>$V_O = 5$ V       | 25°C                                           |         | 0.8               | 40  | nA   |
|           |                                   |                                       | 70°C                                           |         |                   | 1   | μA   |
| $I_{DD}$  | Supply current (four comparators) | Outputs low, No load                  | 25°C                                           |         | 44                | 80  | μA   |
|           |                                   |                                       | 0°C to 70°C                                    |         |                   | 100 |      |

† All characteristics are measured with zero common-mode voltage unless otherwise noted.

NOTE 4: The offset voltage limits given are the maximum values required to drive the output up to 4.5 V or down to 0.3 V with a 2.5-kΩ load to  $V_{DD}$ .

# TLC139, TLC339, TLC339Q

## LinCMOS™ MICROPOWER QUAD COMPARATORS

SLCS119 – DECEMBER 1986 – REVISED JANUARY 1991

### recommended operating conditions

|                                       | TLC339I |     |              | UNIT |
|---------------------------------------|---------|-----|--------------|------|
|                                       | MIN     | NOM | MAX          |      |
| Supply voltage, $V_{DD}$              | 3       | 5   | 16           | V    |
| Common-mode input voltage, $V_{IC}$   | -0.2    |     | $V_{DD}-1.5$ | V    |
| Low-level output current, $I_{OL}$    |         | 8   | 20           | mA   |
| Operating free-air temperature, $T_A$ | 0       |     | 70           | °C   |

### electrical characteristics at specified operating free-air temperature, $V_{DD} = 5$ V (unless otherwise noted)

| PARAMETER |                                   | TEST CONDITIONS†                      | $T_A$         | TLC339I |                   |     | UNIT |
|-----------|-----------------------------------|---------------------------------------|---------------|---------|-------------------|-----|------|
|           |                                   |                                       |               | MIN     | TYP               | MAX |      |
| $V_{IO}$  | Input offset voltage              | $V_{IC} = V_{ICRmin}$ ,<br>See Note 3 | 25°C          |         | 1.4               | 5   | mV   |
|           |                                   |                                       | -40°C to 85°C |         |                   | 7   |      |
| $I_{IO}$  | Input offset current              | $V_{IC} = 2.5$ V                      | 25°C          |         | 1                 |     | pA   |
|           |                                   |                                       | 85°C          |         |                   | 1   | nA   |
| $I_{IB}$  | Input bias current                | $V_{IC} = 2.5$ V                      | 25°C          |         | 5                 |     | pA   |
|           |                                   |                                       | 85°C          |         |                   | 2   | nA   |
| $V_{ICR}$ | Common-mode input voltage range   |                                       | 25°C          |         | 0 to $V_{DD}-1$   |     | V    |
|           |                                   |                                       | -40°C to 85°C |         | 0 to $V_{DD}-1.5$ |     |      |
| CMRR      | Common-mode rejection ratio       | $V_{IC} = V_{ICRmin}$                 | 25°C          |         | 84                |     | dB   |
|           |                                   |                                       | 85°C          |         | 84                |     |      |
|           |                                   |                                       | -40°C         |         | 84                |     |      |
| $k_{SVR}$ | Supply-voltage rejection ratio    | $V_{DD} = 5$ V to 10 V                | 25°C          |         | 85                |     | dB   |
|           |                                   |                                       | 85°C          |         | 85                |     |      |
|           |                                   |                                       | -40°C         |         | 84                |     |      |
| $V_{OL}$  | Low-level output voltage          | $V_{ID} = -1$ V, $I_{OL} = 6$ mA      | 25°C          |         | 300               | 400 | mV   |
|           |                                   |                                       | 85°C          |         |                   | 700 |      |
| $I_{OH}$  | High-level output current         | $V_{ID} = -1$ V, $V_O = 5$ V          | 25°C          |         | 0.8               | 40  | nA   |
|           |                                   |                                       | 85°C          |         |                   | 1   | μA   |
| $I_{DD}$  | Supply current (four comparators) | Outputs low, No load                  | 25°C          |         | 44                | 80  | μA   |
|           |                                   |                                       | -40°C to 85°C |         |                   | 125 |      |

† All characteristics are measured with zero common-mode voltage unless otherwise noted.

NOTE 3: The offset voltage limits given are the maximum values required to drive the output up to 4.5 V or down to 0.3 V with a 2.5-kΩ load to  $V_{DD}$ .

# TLC139, TLC339, TLC339Q

## LinCMOS™ MICROPOWER QUAD COMPARATORS

SLCS119 – DECEMBER 1986 – REVISED JANUARY 1991

### recommended operating conditions

|                                       | TLC339Q |     |              | UNIT |
|---------------------------------------|---------|-----|--------------|------|
|                                       | MIN     | NOM | MAX          |      |
| Supply voltage, $V_{DD}$              | 4       | 5   | 16           | V    |
| Common-mode input voltage, $V_{IC}$   | 0       |     | $V_{DD}-1.5$ | V    |
| Low-level output current, $I_{OL}$    |         |     | 20           | mA   |
| Operating free-air temperature, $T_A$ | -40     |     | 125          | °C   |

### electrical characteristics at specified operating free-air temperature, $V_{DD} = 5$ V (unless otherwise noted)

| PARAMETER |                                   | TEST CONDITIONS†                      | $T_A$          | TLC339Q |                   |     | UNIT |
|-----------|-----------------------------------|---------------------------------------|----------------|---------|-------------------|-----|------|
|           |                                   |                                       |                | MIN     | TYP               | MAX |      |
| $V_{IO}$  | Input offset voltage              | $V_{IC} = V_{ICRmin}$ ,<br>See Note 3 | 25°C           |         | 1.4               | 5   | mV   |
|           |                                   |                                       | -40°C to 125°C |         |                   | 10  |      |
| $I_{IO}$  | Input offset current              | $V_{IC} = 2.5$ V                      | 25°C           |         | 1                 |     | pA   |
|           |                                   |                                       | 125°C          |         |                   | 15  | nA   |
| $I_{IB}$  | Input bias current                | $V_{IC} = 2.5$ V                      | 25°C           |         | 5                 |     | pA   |
|           |                                   |                                       | 125°C          |         |                   | 30  | nA   |
| $V_{ICR}$ | Common-mode input voltage range   |                                       | 25°C           |         | 0 to $V_{DD}-1$   |     | V    |
|           |                                   |                                       | -40°C to 125°C |         | 0 to $V_{DD}-1.5$ |     |      |
| CMRR      | Common-mode rejection ratio       | $V_{IC} = V_{ICRmin}$                 | 25°C           |         | 84                |     | dB   |
|           |                                   |                                       | 125°C          |         | 84                |     |      |
|           |                                   |                                       | -40°C          |         | 84                |     |      |
| $k_{SVR}$ | Supply-voltage rejection ratio    | $V_{DD} = 5$ V to 10 V                | 25°C           |         | 85                |     | dB   |
|           |                                   |                                       | 125°C          |         | 84                |     |      |
|           |                                   |                                       | -40°C          |         | 84                |     |      |
| $V_{OL}$  | Low-level output voltage          | $V_{ID} = -1$ V, $I_{OL} = 6$ mA      | 25°C           |         | 300               | 400 | mV   |
|           |                                   |                                       | 125°C          |         |                   | 800 |      |
| $I_{OH}$  | High-level output current         | $V_{ID} = -1$ V, $V_O = 5$ V          | 25°C           |         | 0.8               | 40  | nA   |
|           |                                   |                                       | 125°C          |         |                   | 1   | μA   |
| $I_{DD}$  | Supply current (four comparators) | Outputs low, No load                  | 25°C           |         | 44                | 80  | μA   |
|           |                                   |                                       | -40°C to 125°C |         |                   | 125 |      |

† All characteristics are measured with zero common-mode voltage unless otherwise noted.

NOTE 4: The offset voltage limits given are the maximum values required to drive the output up to 4.5 V or down to 0.3 V with a 2.5-kΩ load to  $V_{DD}$ .

switching characteristics,  $V_{DD} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (see Figure 3)


| PARAMETER                                                  | TEST CONDITIONS                               | TLC139M, TLC339C<br>TLC339I, TLC339M<br>TLC339Q |      |     | UNIT          |
|------------------------------------------------------------|-----------------------------------------------|-------------------------------------------------|------|-----|---------------|
|                                                            |                                               | MIN                                             | TYP  | MAX |               |
| $t_{PLH}$ Propagation delay time, low-to-high output       | $f = 10\text{ kHz}$ ,<br>$C_L = 15\text{ pF}$ | Overdrive = 2 mV                                | 4.5  |     | $\mu\text{s}$ |
|                                                            |                                               | Overdrive = 5 mV                                | 2.5  |     |               |
|                                                            |                                               | Overdrive = 10 mV                               | 1.7  |     |               |
|                                                            |                                               | Overdrive = 20 mV                               | 1.2  |     |               |
|                                                            |                                               | Overdrive = 40 mV                               | 1.0  |     |               |
|                                                            | $V_I = 1.4\text{ V}$ step at $IN+$            |                                                 | 1.1  |     |               |
| $t_{PHL}$ Propagation delay time, high-to-low level output | $f = 10\text{ kHz}$ ,<br>$C_L = 15\text{ pF}$ | Overdrive = 2 mV                                | 3.6  |     | $\mu\text{s}$ |
|                                                            |                                               | Overdrive = 5 mV                                | 2.1  |     |               |
|                                                            |                                               | Overdrive = 10 mV                               | 1.3  |     |               |
|                                                            |                                               | Overdrive = 20 mV                               | 0.85 |     |               |
|                                                            |                                               | Overdrive = 40 mV                               | 0.55 |     |               |
|                                                            | $V_I = 1.4\text{ V}$ step at $IN+$            |                                                 | 0.10 |     |               |
| $t_{THL}$ Transition time, high-to-low level output        | $f = 10\text{ kHz}$ ,<br>$C_L = 15\text{ pF}$ | Overdrive = 50 mV                               | 20   |     | ns            |

### PARAMETER MEASUREMENT INFORMATION

The TLC139 and TLC339 contain a digital output stage that, if held in the linear region of the transfer curve, can cause damage to the device. Conventional operational amplifier/comparator testing incorporates the use of a servo-loop that is designed to force the device output to a level within this linear region. Since the servo-loop method of testing cannot be used, the following alternatives for testing parameters such as input offset voltage, common-mode rejection, etc., are suggested.

To verify that the input offset voltage falls within the limits specified, the limit value is applied to the input as shown in Figure 1(a). With the noninverting input positive with respect to the inverting input, the output should be high. With the input polarity reversed, the output should be low.

A similar test can be made to verify the input offset voltage at the common-mode extremes. The supply voltages can be slewed as shown in Figure 1(b) for the  $V_{ICR}$  test, rather than changing the input voltages, to provide greater accuracy.

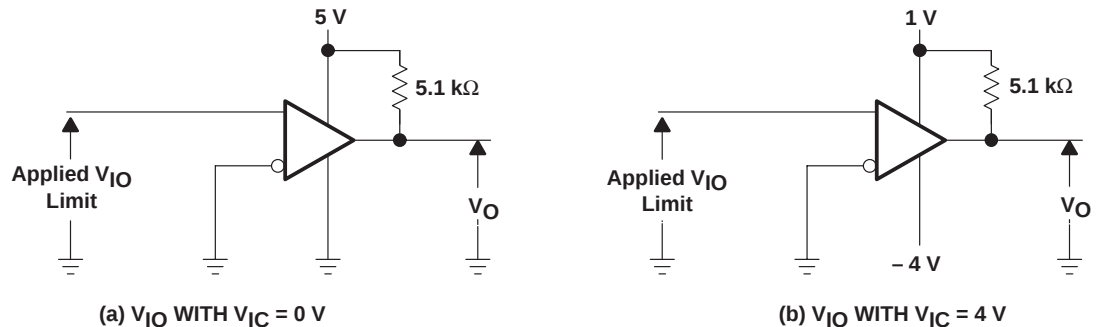


**Figure 1. Method for Verifying That Input Offset Voltage Is Within Specified Limits**

## PARAMETER MEASUREMENT INFORMATION

A close approximation of the input offset voltage can be obtained by using a binary search method to vary the differential input voltage while monitoring the output state. When the applied input voltage differential is equal but opposite in polarity to the input offset voltage, the output changes state.

Figure 2 illustrates a practical circuit for direct dc measurement of input offset voltage that does not bias the comparator into the linear region. The circuit consists of a switching mode servo loop in which U1A generates a triangular waveform of approximately 20-mV amplitude. U1B acts as a buffer, with C2 and R4 removing any residual dc offset. The signal is then applied to the inverting input of the comparator under test, while the noninverting input is driven by the output of the integrator formed by U1C through the voltage divider formed by R9 and R10. The loop reaches a stable operating point when the output of the comparator under test has a duty cycle of exactly 50%, which can only occur when the incoming triangle wave is sliced symmetrically or when the voltage at the noninverting input exactly equals the input offset voltage.

Voltage divider R9 and R10 provides a step-up of the input offset voltage by a factor of 100 to make measurement easier. The values of R5, R8, R9, and R10 can significantly influence the accuracy of the reading; therefore, it is suggested that their tolerance level be 1% or lower.

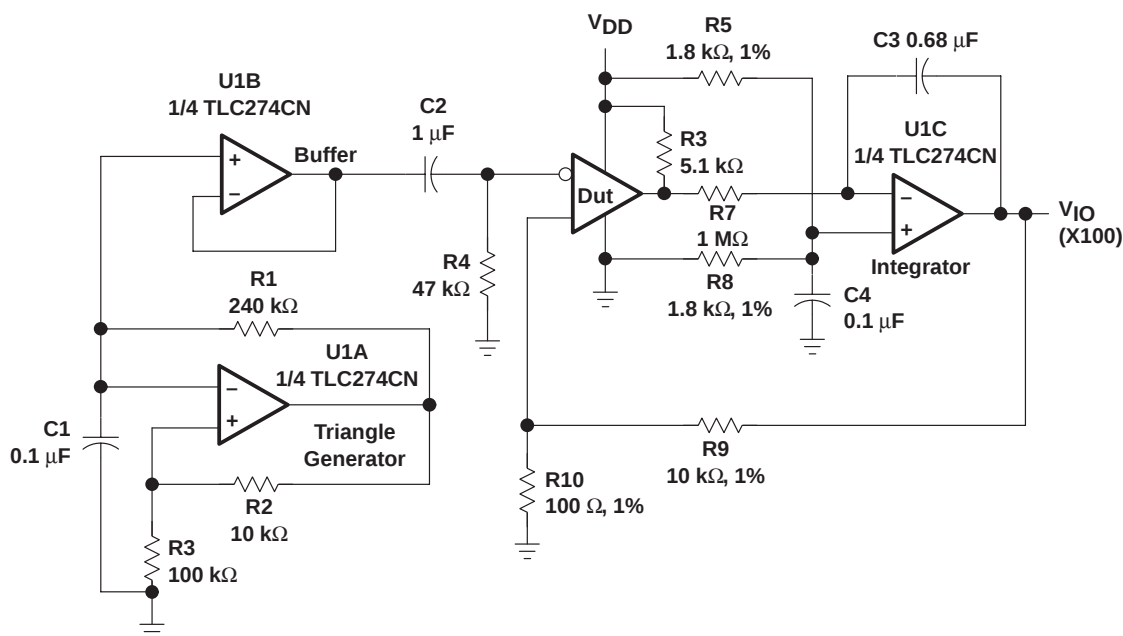


**Figure 2. Circuit for Input Offset Voltage Measurement**

Measuring the extremely low values of input current requires isolation from all other sources of leakage current and compensation for the leakage of the test socket and board. With a good picoammeter, the socket and board leakage can be measured with no device in the socket. Subsequently, this open socket leakage value can be subtracted from the measurement obtained, with a device in the socket to obtain the actual input current of the device.

## PARAMETER MEASUREMENT INFORMATION

Propagation delay time is defined as the interval between the application of an input step function and the instant when the output reaches 50% of its maximum value. Propagation delay time, low-to-high-level output, is measured from the leading edge of the input pulse, while propagation delay time, high-to-low-level output, is measured from the trailing edge of the input pulse. Propagation delay time measurement at low input signal levels can be greatly affected by the input offset voltage. The offset voltage should be balanced by the adjustment at the inverting input as shown in Figure 3, so that the circuit is just at the transition point. Then a low signal, for example 105-mV or 5-mV overdrive, causes the output to change state.

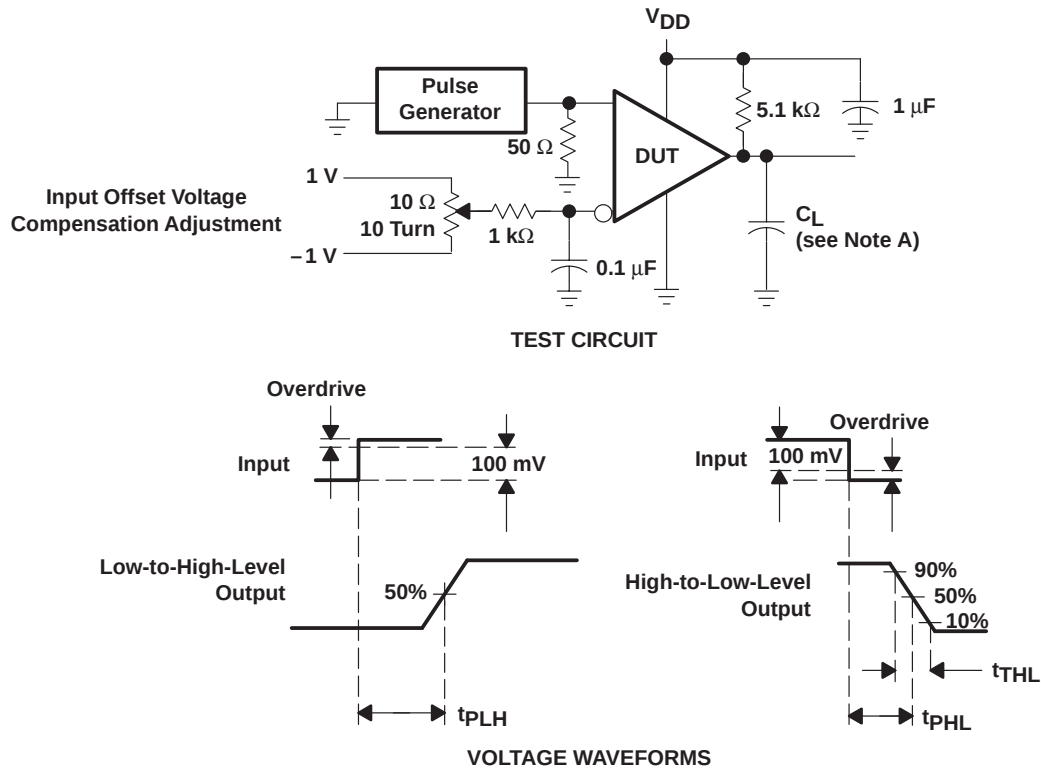

NOTE A:  $C_L$  includes probe and jig capacitance.

**Figure 3. Propagation Delay, Rise, and Fall Times Test Circuit and Voltage Waveforms**

# TLC139, TLC339, TLC339Q

## LinCMOS™ MICROPOWER QUAD COMPARATORS

SLCS119 – DECEMBER 1986 – REVISED JANUARY 1991

### TYPICAL CHARACTERISTICS

Table of Graphs

|           |                                                 |                                                         | FIGURE   |
|-----------|-------------------------------------------------|---------------------------------------------------------|----------|
| $V_{IO}$  | Input offset voltage                            | Distribution                                            | 4        |
| $I_{IB}$  | Input bias current                              | vs Free-air temperature                                 | 5        |
| CMRR      | Common-mode rejection ratio                     | vs Free-air temperature                                 | 6        |
| $k_{SVR}$ | Supply-voltage rejection ratio                  | vs Free-air temperature                                 | 7        |
| $I_{OH}$  | High-level output current                       | vs High-level output voltage<br>vs Free-air temperature | 8<br>9   |
| $V_{OL}$  | Low-level output voltage                        | vs Low-level output current<br>vs Free-air temperature  | 10<br>11 |
| $I_{DD}$  | Supply current                                  | vs Supply voltage<br>vs Free-air temperature            | 12<br>13 |
| $t_{PLH}$ | Low-to-high level output propagation delay time | vs Supply voltage                                       | 14       |
| $t_{PHL}$ | Low-to-high level output propagation delay time | vs Supply voltage                                       | 15       |
|           | Overdrive voltage                               | vs Low-to-high-level output propagation delay time      | 16       |
| $t_f$     | Output fall time                                | vs Supply voltage                                       | 17       |
|           | Overdrive voltage                               | vs High-to-low-level output propagation delay time      | 18       |



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

TYPICAL CHARACTERISTICS†

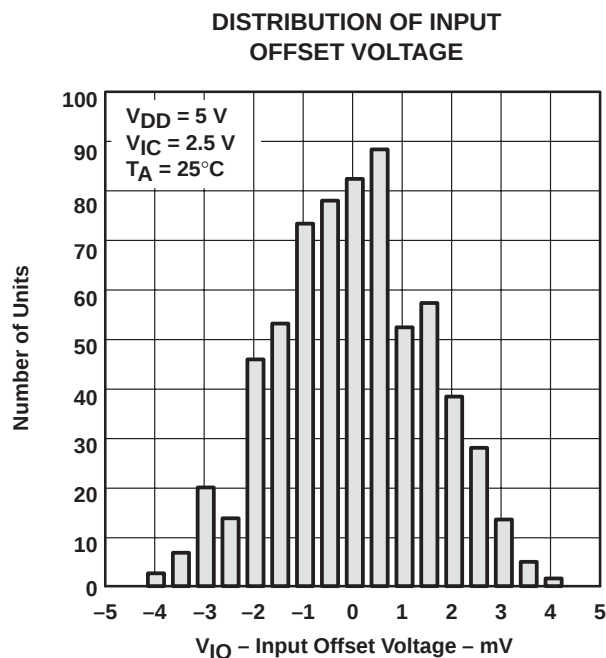


Figure 4

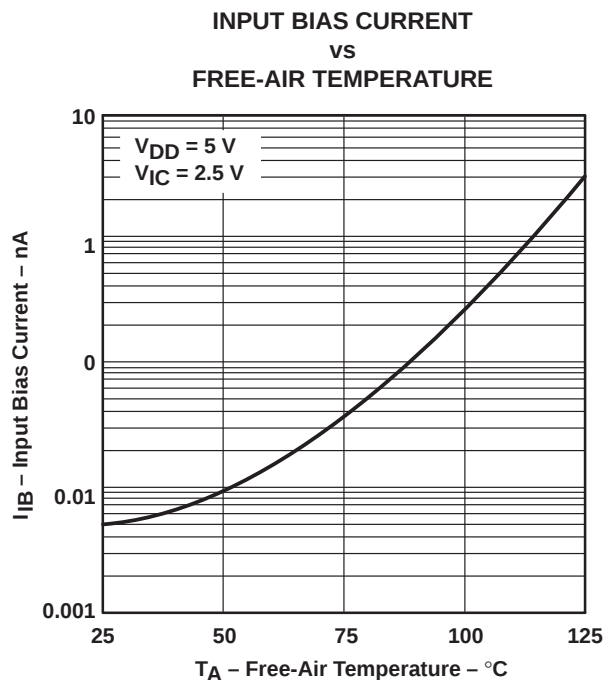


Figure 5

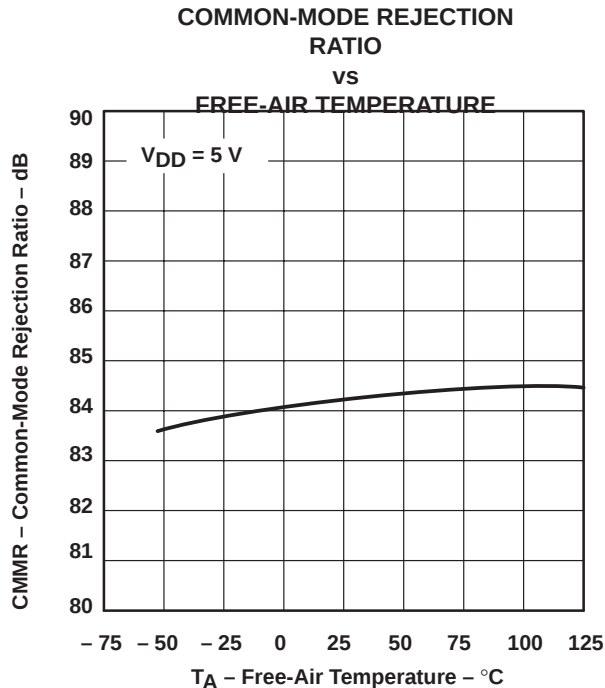


Figure 6

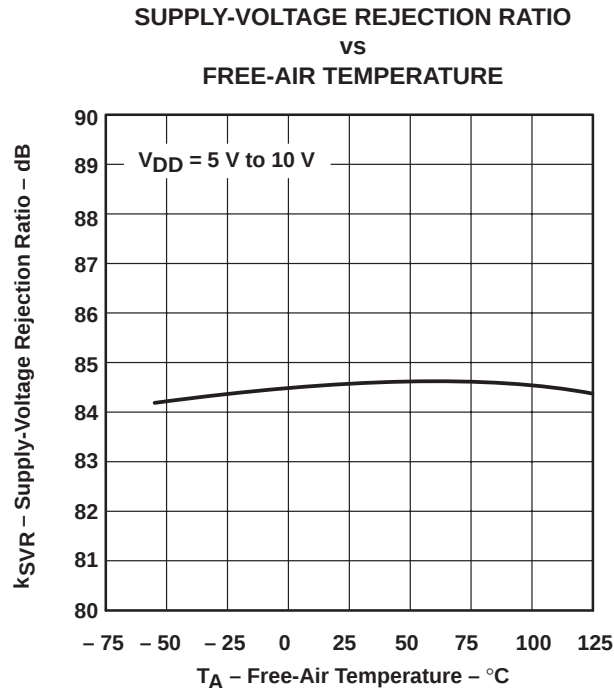


Figure 7

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC139, TLC339, TLC339Q LinCMOS™ MICROPOWER QUAD COMPARATORS

SLCS119 – DECEMBER 1986 – REVISED JANUARY 1991

## TYPICAL CHARACTERISTICS†

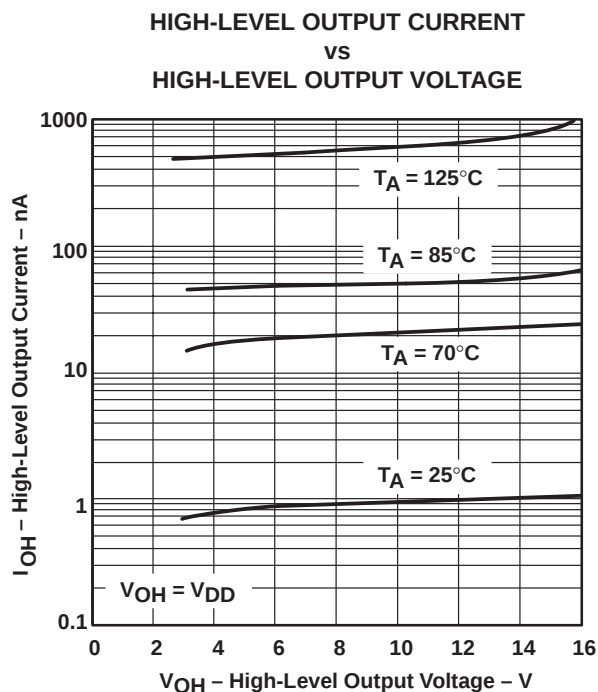


Figure 8

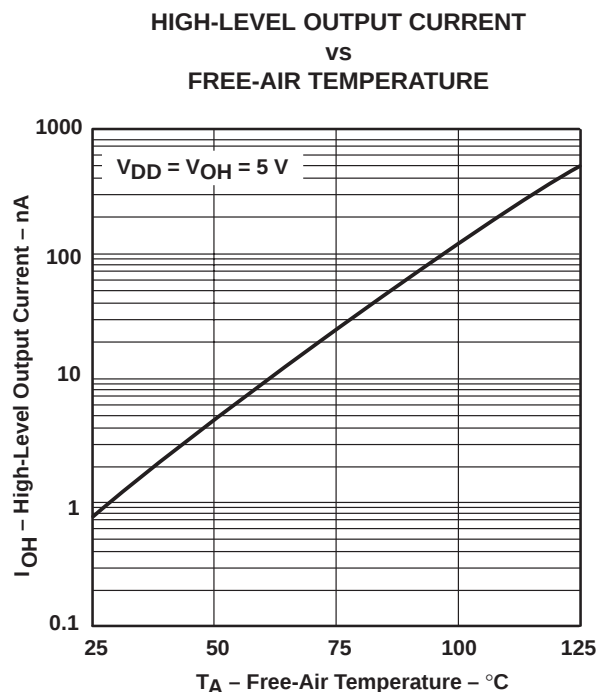


Figure 9

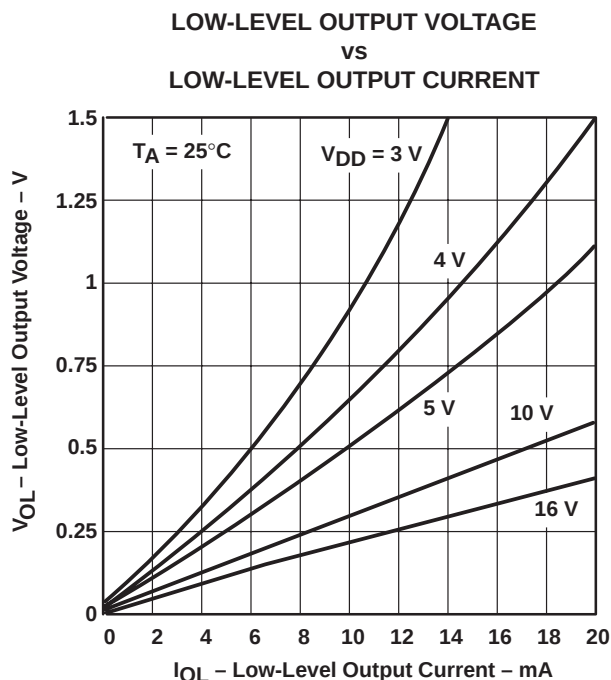


Figure 10





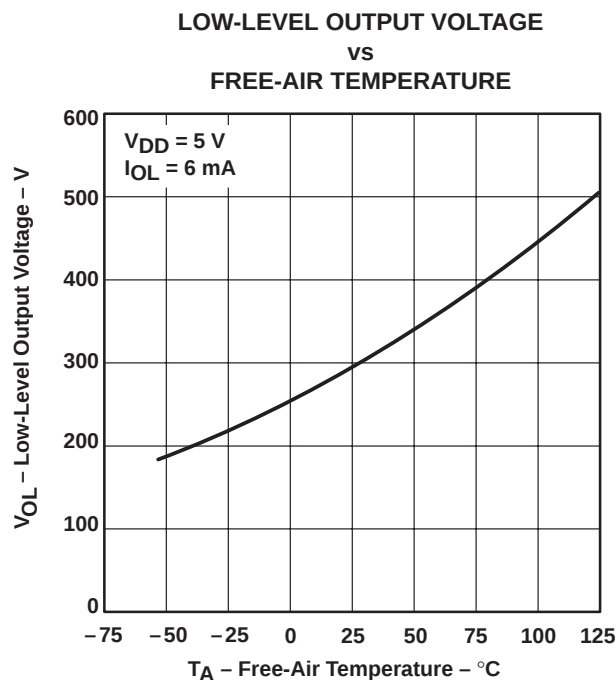


Figure 11

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS†

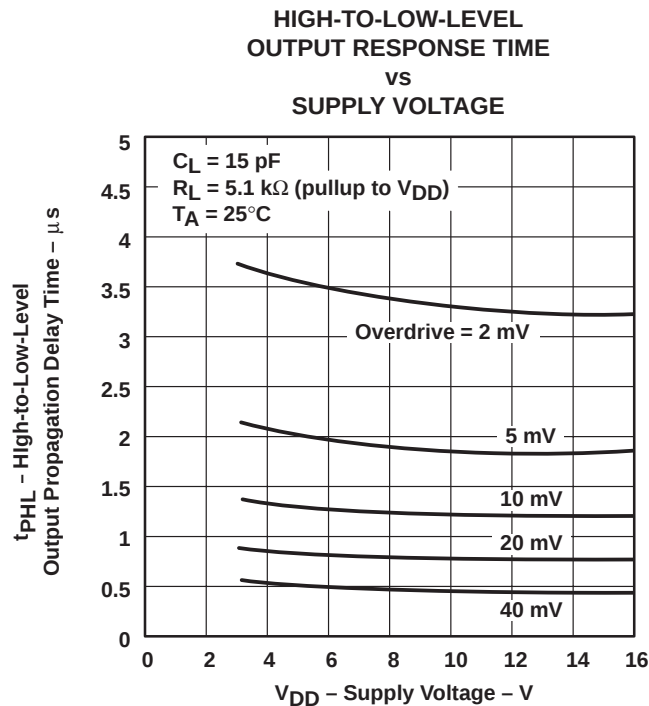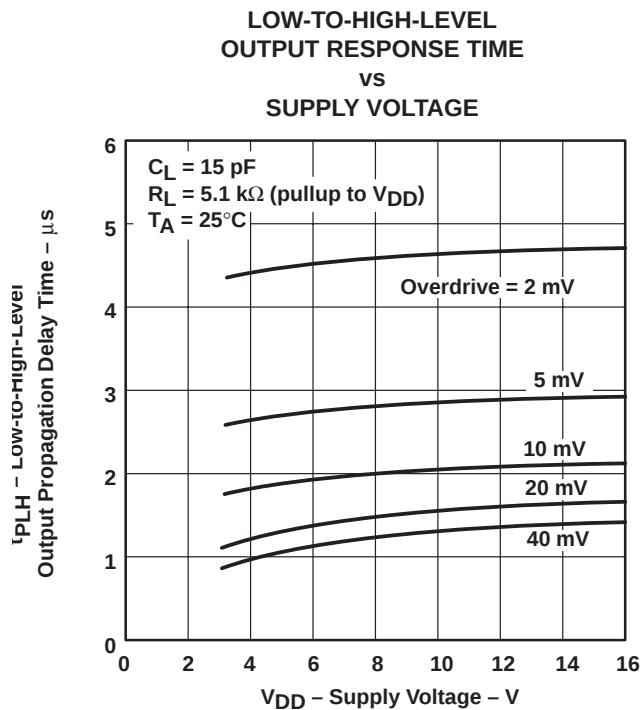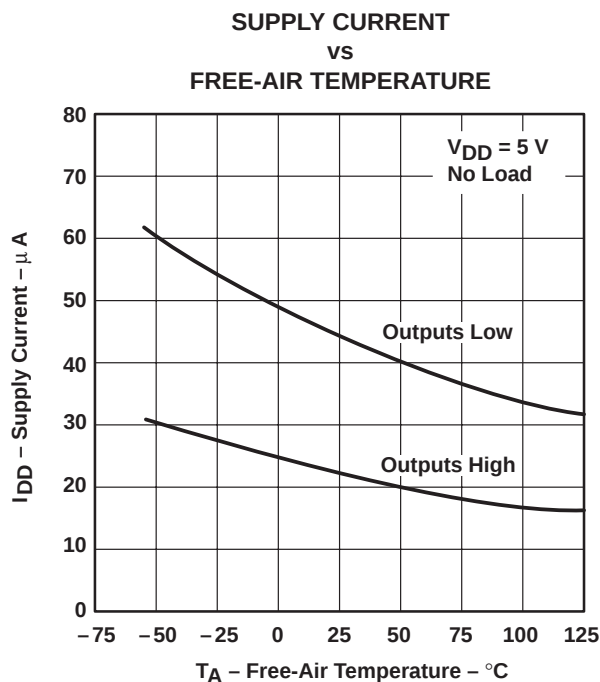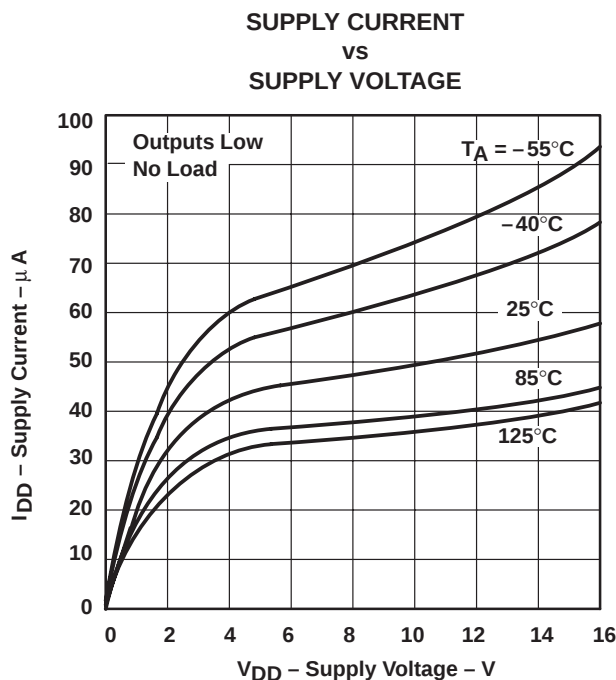

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS

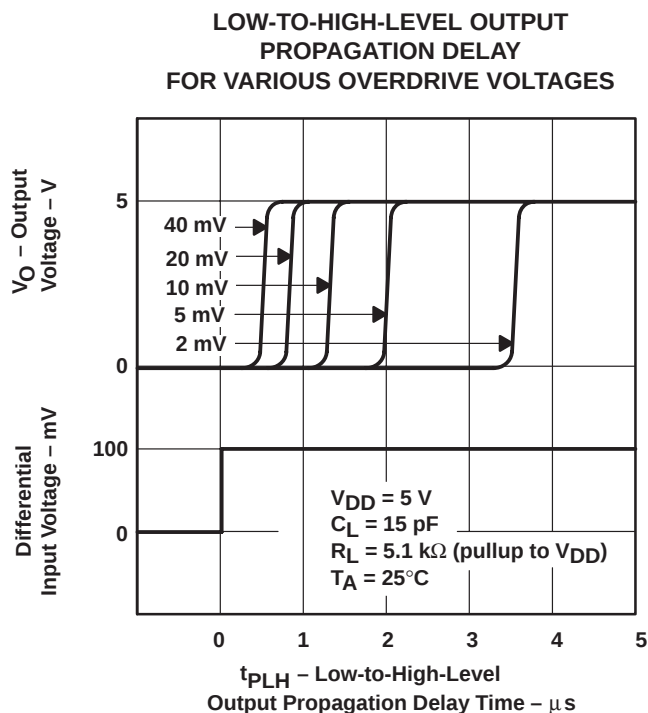


Figure 16

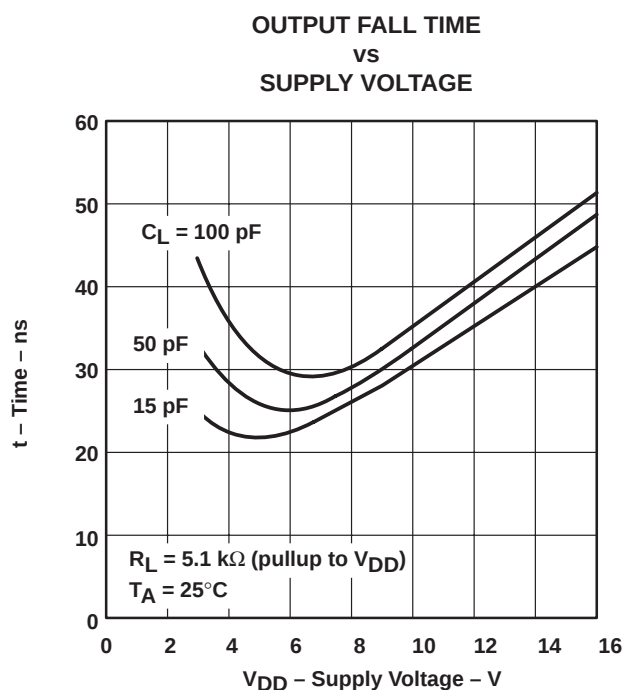


Figure 17

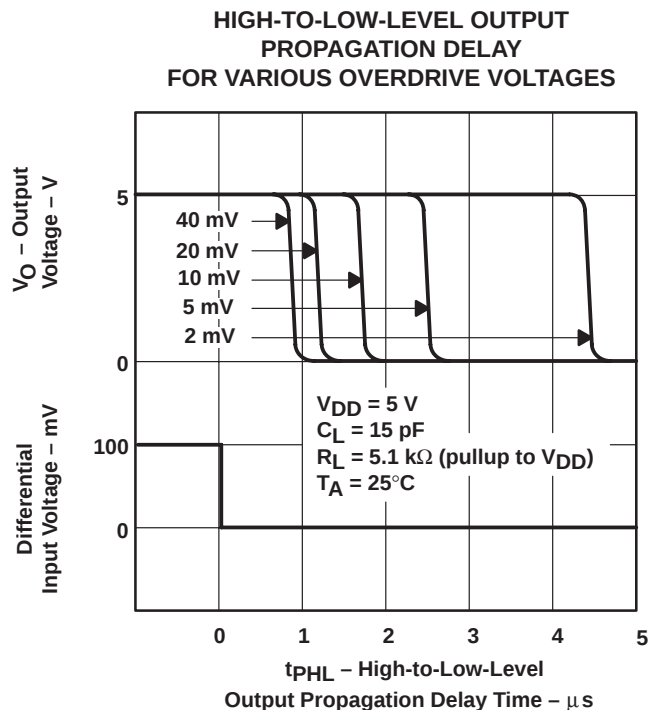


Figure 18

## APPLICATION INFORMATION


The inputs should always remain within the supply rails in order to avoid forward biasing the diodes in the electrostatic discharge (ESD) protection structure. If either input exceeds this range, the device is not damaged as long as the input current is limited to less than 5 mA. To maintain the expected output state, the inputs must remain within the common-mode range. For example, at 25°C with  $V_{DD} = 5\text{ V}$ , both inputs must remain between  $-0.2\text{ V}$  and  $4\text{ V}$  to assure proper device operation. To assure reliable operation, the supply should be decoupled with a capacitor (0.1  $\mu\text{F}$ ) positioned as close to the device as possible.

The output and supply currents require close observation since the TLC139/TLC339 does not provide current protection. For example, each output can source or sink a maximum of 20 mA; however, the total current to ground has an absolute maximum of 60 mA. This prohibits sinking 20 mA from each of the four outputs simultaneously since the total current to ground would be 80 mA.

The TLC139 and TLC339 have internal ESD-protection circuits that prevent functional failures at voltages up to 2000 V as tested under MIL-STD-883C, Method 3015.2; however, exercise care when handling these devices as exposure to ESD may result in the degradation of the device parametric performance.

Table of Applications

|                                              | FIGURE |
|----------------------------------------------|--------|
| Pulse-width-modulated motor speed controller | 19     |
| Enhanced supply supervisor                   | 20     |
| Two-phase nonoverlapping clock generator     | 21     |

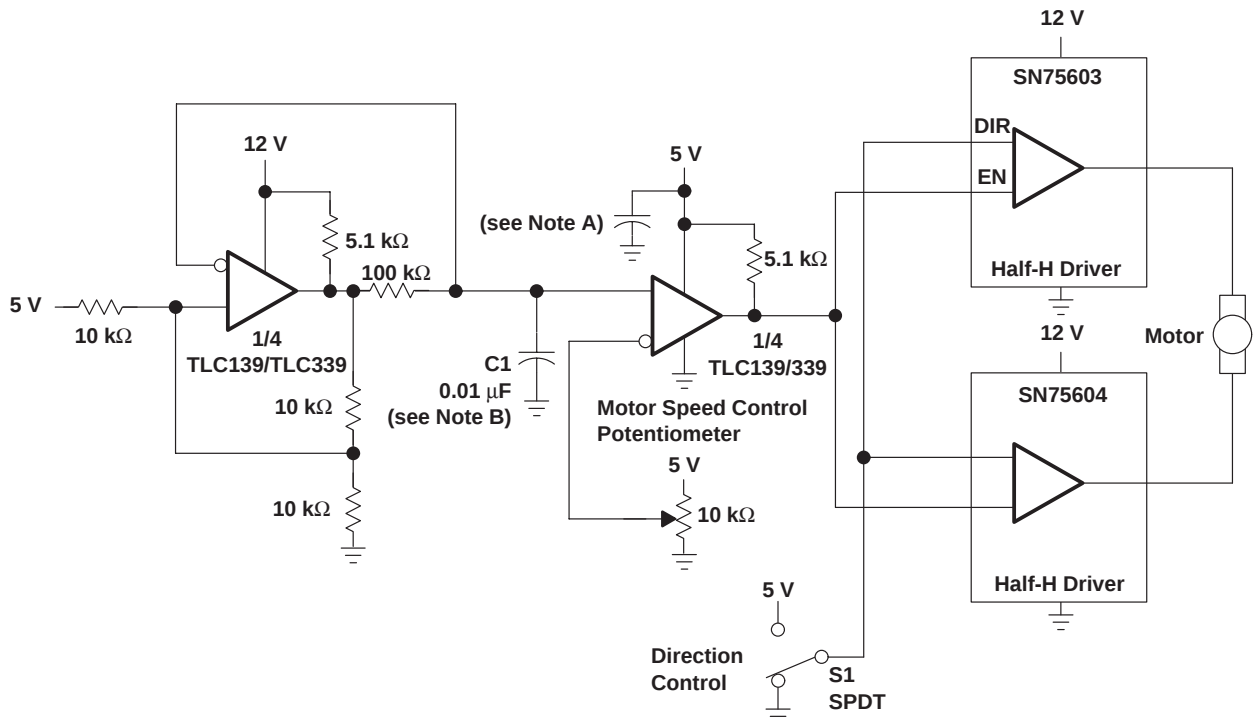


- NOTES: A. The recommended minimum capacitance is 10  $\mu\text{F}$  to eliminate common ground switching noise.  
 B. Select C1 for change in oscillator frequency.

**Figure 19. Pulse-Width-Modulated Motor Speed Controller**

# LinCMOS™ MICROPOWER QUAD COMPARATORS

SLCS119 – DECEMBER 1986 – REVISED JANUARY 1991

## TYPICAL APPLICATION DATA

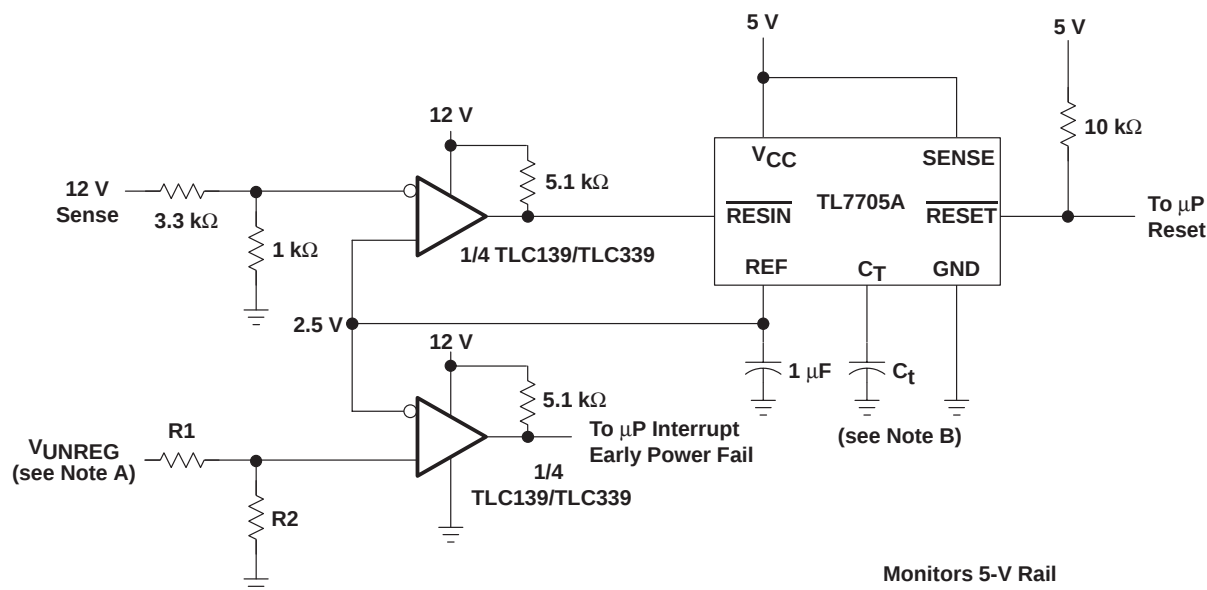


NOTES: A.  $V_{UNREG} = 2.5 \left( \frac{R1 + R2}{R2} \right)$

B. The value of  $C_t$  determines the time delay of reset.

Monitors 5-V Rail  
Monitors 12-V Rail  
Early Power Fail Warning

### Figure 20. Enhanced Supply Supervisor

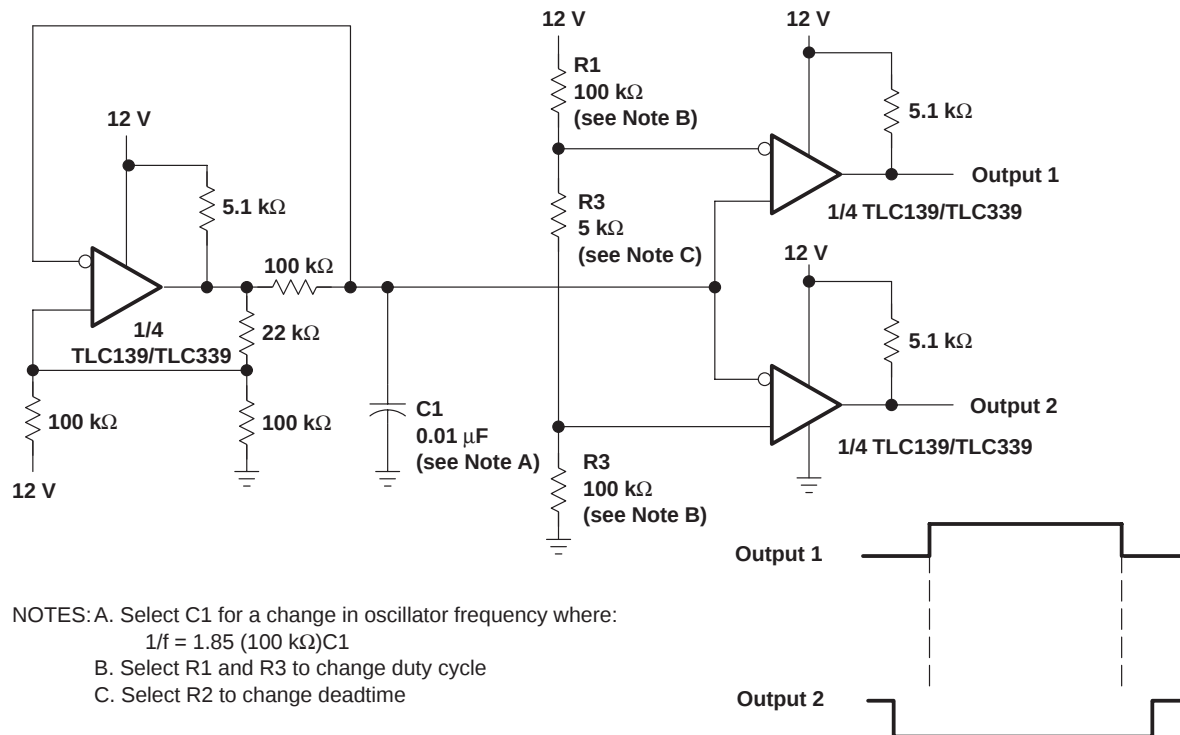

NOTES: A. Select C1 for a change in oscillator frequency where:  
 $1/f = 1.85 (100 \text{ k}\Omega) C1$   
 B. Select R1 and R3 to change duty cycle  
 C. Select R2 to change deadtime

### Figure 21. Two-Phase Nonoverlapping Clock Generator

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.