

M37702M4AXXFP, M37702M4BXXFP

M37702M4-XXFP and M37702S4FP are respectively unified into M37702M4AXXFP and M37702S4AFP.

M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

DESCRIPTION

The M37702M4AXXFP is a single-chip microcomputer designed with high-performance CMOS silicon gate technology. This is housed in a 80-pin plastic molded QFP. This single-chip microcomputer has a large 16M bytes address space, three instruction queue buffers, and two data buffers for high-speed instruction execution. The CPU is a 16-bit parallel processor that can also be switched to perform 8-bit parallel processing. This microcomputer is suitable for office, business and industrial equipment controller that require high-speed processing of large data.

The differences between M37702M4AXXFP, M37702M4BXXFP, M37702S4AFP and M37702S4BFP are the ROM size and the external clock input frequency as shown below. Therefore, the following descriptions will be for the M37702M4AXXFP unless otherwise noted.

Type name	ROM size	External clock input frequency
M37702M4AXXFP	32K bytes	16MHz
M37702M4BXXFP	32K bytes	25MHz
M37702S4AFP	External	16MHz
M37702S4BFP	External	25MHz

The M37702M4AXXFP has the same functions as the M37702M2AXXFP except for the memory size.

FEATURES

- Number of basic instructions.....103
- Memory size ROM32K bytes
RAM..... 2048 bytes
- Instruction execution time
M37702M4AXXFP, M37702S4AFP
(The fastest instruction at 16 MHz frequency)..... 250ns
M37702M4BXXFP, M37702S4BFP
(The fastest instruction at 25 MHz frequency)..... 160ns
- Single power supply.....5V±10%
- Low power dissipation (at 16 MHz frequency)
..... 60mW (Typ.)
- Interrupts 19 types 7 levels
- Multiple function 16-bit timer 5+3
- UART (may also be synchronous) 2
- 8-bit A-D converter 8-channel inputs
- 12-bit watchdog timer
- Programmable input/output
(ports P0, P1, P2, P3, P4, P5, P6, P7, P8) 68

APPLICATION

Control devices for office equipment such as copiers, printers, typewriters, facsimiles, word processors and personal computers

Control devices for industrial equipment such as ME, NC, communication, and measuring instruments

NOTE


Refer to "Chapter 5 PRECAUTIONS" when using this microcomputer.

The M37702M4AXXFP and M37702S4AFP satisfy the timing requirements and the switching characteristics of the former M37702M4-XXFP and M37702S4FP.

M37702M4AXXFP, M37702M4BXXFP M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

PIN CONFIGURATION (TOP VIEW)

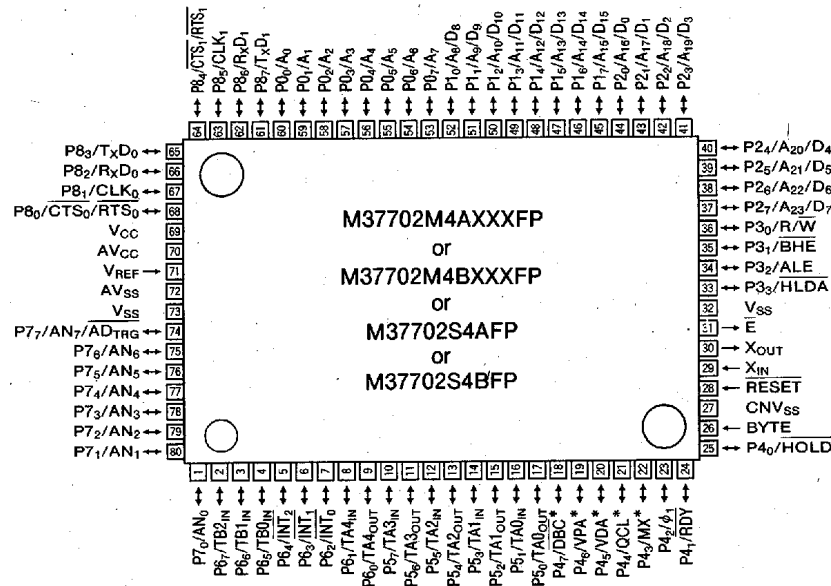


Outline 80P6N-A

*: Used in the evaluation chip mode only

MITSUBISHI MICROCOMPUTERS
M37702M4AXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

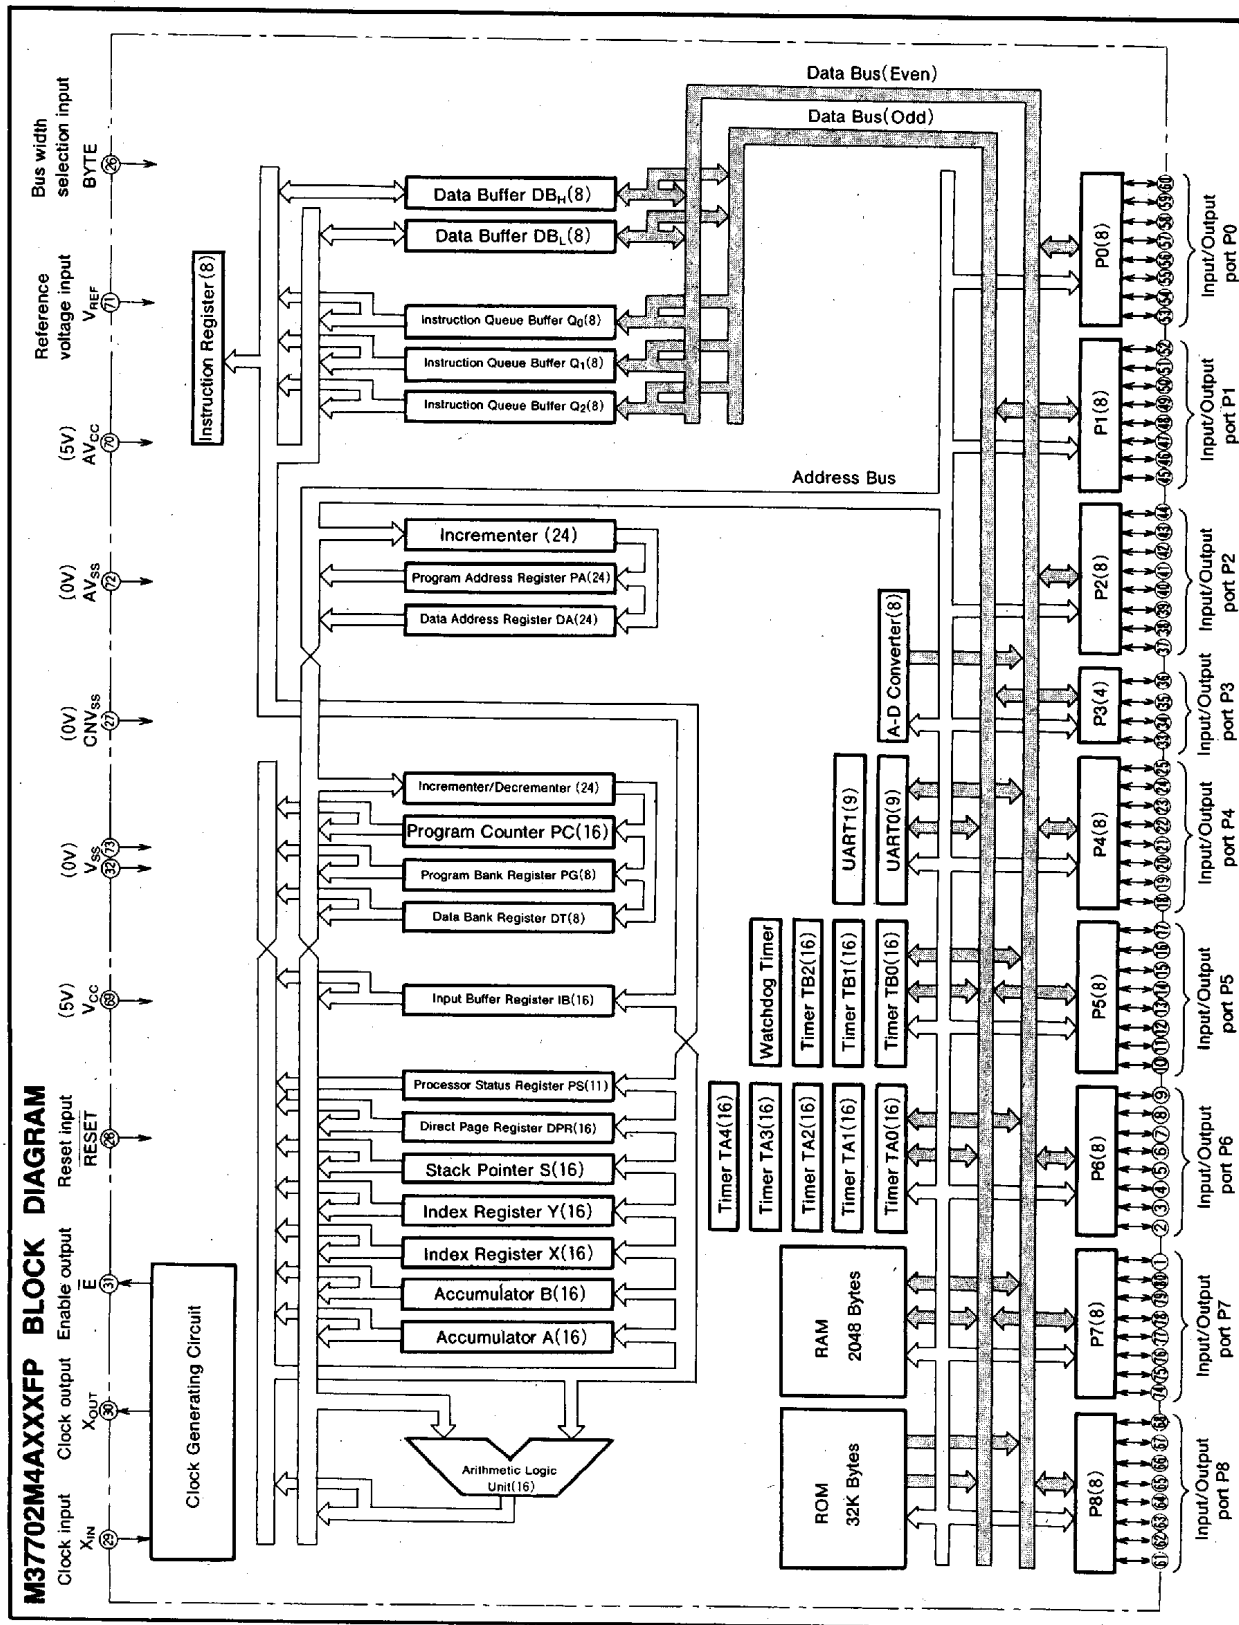

6249828 0026231 272



MITSUBISHI MICROCOMPUTERS
M37702M4AXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

FUNCTIONS OF M37702M4AXXFP

Parameter		Functions
Number of basic instructions		103
Instruction execution time	M37702M4AXXFP, M37702S4AFP	250ns (the fastest instruction at external clock 16MHz frequency)
	M37702M4BXXFP, M37702S4BFP	160ns (the fastest instruction at external clock 25MHz frequency)
Memory size	ROM	32K bytes
	RAM	2048 bytes
Input/Output ports	P0~P2, P4~P8	8-bitX 8
	P3	4-bitX 1
Multi-function timers	TA0, TA1, TA2, TA3, TA4	16-bitX 5
	TB0, TB1, TB2	16-bitX 3
Serial I/O		(UART or clock synchronous serial I/O)X2
A-D converter		8-bitX 1 (8 channels)
Watchdog timer		12-bitX 1
Interrupts		3 external types, 16 internal types (Each interrupt can be set the priority levels to 0~7.)
Clock generating circuit		Built-in(externally connected to a ceramic resonator or quartz crystal resonator)
Supply voltage		5V $\pm$ 10%
Power dissipation		60mW(at external clock 16MHz frequency)
Input/Output characteristic	Input/Output voltage	5V
	Output current	5mA
Memory expansion		Maximum 16M bytes
Operating temperature range		-20~85°C
Device structure		CMOS high-performance silicon gate process
Package		80-pin plastic molded QFP

6249828 0026232 109

MITSUBISHI MICROCOMPUTERS
M37702M4AXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

PIN DESCRIPTION

Pin	Name	Input/Output	Functions
V _{CC} , V _{SS}	Power supply		Supply 5 V±10% to V _{CC} and 0 V to V _{SS} .
CNV _{SS}	CNV _{SS} input	Input	This pin controls the processor mode. Connect to V _{SS} for single-chip mode, and to V _{CC} for external ROM types.
RESET	Reset input	Input	To enter the reset state, this pin must be kept at a "L" condition which should be maintained for the required time.
X _{IN}	Clock input	Input	These are I/O pins of internal clock generating circuit. Connect a ceramic or quartz crystal resonator between X _{IN} and X _{OUT} . When an external clock is used, the clock source should be connected to the X _{IN} pin and the X _{OUT} pin should be left open.
X _{OUT}	Clock output	Output	
$\bar{E}$	Enable output	Output	Data or instruction read and data write are performed when output from this pin is "L".
BYTE	Bus width selection input	Input	In memory expansion mode or microprocessor mode, this pin determines whether the external data bus is 8-bit width or 16-bit width. The width is 16 bits when "L" signal inputs and 8 bits when "H" signal inputs.
AV _{CC} , AV _{SS}	Analog supply input		Power supply for the A-D converter. Connect AV _{CC} to V _{CC} and AV _{SS} to V _{SS} externally.
V _{REF}	Reference voltage input	Input	This is reference voltage input pin for the A-D converter.
P0 ₀ ~P0 ₇	I/O port P0	I/O	In single-chip mode, port P0 becomes an 8-bit I/O port. An I/O direction register is available so that each pin can be programmed for input or output. These ports are in input mode when reset. Address(A ₇ ~A ₀) is output in memory expansion mode or microprocessor mode.
P1 ₀ ~P1 ₇	I/O port P1	I/O	In single-chip mode, these pins have the same functions as port P0. When the BYTE pin is set to "L" in memory expansion mode or microprocessor mode and external data bus is 16-bit width, high-order data (D ₁₅ ~D ₈) is input or output when $\bar{E}$ output is "L" and an address (A ₁₅ ~A ₈) is output when $\bar{E}$ output is "H". If the BYTE pin is "H" that is an external data bus is 8-bit width, only address(A ₁₅ ~A ₈) is output.
P2 ₀ ~P2 ₇	I/O port P2	I/O	In single-chip mode, these pins have the same functions as port P0. In memory expansion mode or microprocessor mode low-order data(D ₇ ~D ₀) is input or output when $\bar{E}$ output is "L" and an address(A ₂₃ ~A ₁₆) is output when $\bar{E}$ output is "H".
P3 ₀ ~P3 ₃	I/O port P3	I/O	In single-chip mode, these pins have the same functions as port P0. In memory expansion mode or microprocessor mode, R/W, BHE, ALE, and HLDA signals are output.
P4 ₀ ~P4 ₇	I/O port P4	I/O	In single-chip mode, these pins have the same functions as port P0. In memory expansion mode or microprocessor mode, P4 ₀ and P4 ₁ become $\overline{HOLD}$ and $\overline{RDY}$ input pin respectively. Functions of other pins are the same as in single-chip mode. In single-chip mode or memory expansion mode, port P4 ₂ can be programmed for ϕ_1 output pin divided the clock to X _{IN} pin by 2. In microprocessor mode, P4 ₂ always has the function as ϕ_1 output pin.
P5 ₀ ~P5 ₇	I/O port P5	I/O	In addition to having the same functions as port P0 in single-chip mode, these pins also function as I/O pins for timer A0, timer A1, timer A2 and timer A3.
P6 ₀ ~P6 ₇	I/O port P6	I/O	In addition to having the same functions as port P0 in single-chip mode, these pins also function as I/O pins for timer A4, external interrupt input INT ₀ , INT ₁ and INT ₂ pins, and input pins for timer B0, timer B1 and timer B2.
P7 ₀ ~P7 ₇	I/O port P7	I/O	In addition to having the same functions as port P0 in single-chip mode, these pins also function as analog input AN ₀ ~AN ₇ input pins. P7 ₇ also has an A-D conversion trigger input function.
P8 ₀ ~P8 ₇	I/O port P8	I/O	In addition to having the same functions as port P0 in single-chip mode, these pins also function as RxD, TxD, CLK, CTS/RTS pins for UART 0 and UART 1.

6249828 0026233 045

MITSUBISHI MICROCOMPUTERS
M37702M4AXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

BASIC FUNCTION BLOCKS

The M37702M4AXXFP has the same functions as the M37702M2AXXFP except for the following.

- (1) The ROM size is 32K bytes.
- (2) The RAM size is 2048 bytes.

Therefore, refer to the section on the M37702M2AXXFP.

MEMORY

The memory map is shown in Figure 1.

ADDRESSING MODES

The M37702M4AXXFP has 28 powerful addressing modes. Refer to the 7700 Family addressing mode description for the details of each addressing mode.

MACHINE INSTRUCTION LIST

The M37702M4AXXFP has 103 machine instructions. Refer to the 7700 Family machine instruction list for details.

DATA REQUIRED FOR MASK ORDERING

Please send the following data for mask orders.

- (1) Mask ROM order confirmation form
- (2) 80P6N mark specification form
- (3) ROM data (EPROM 3 sets)

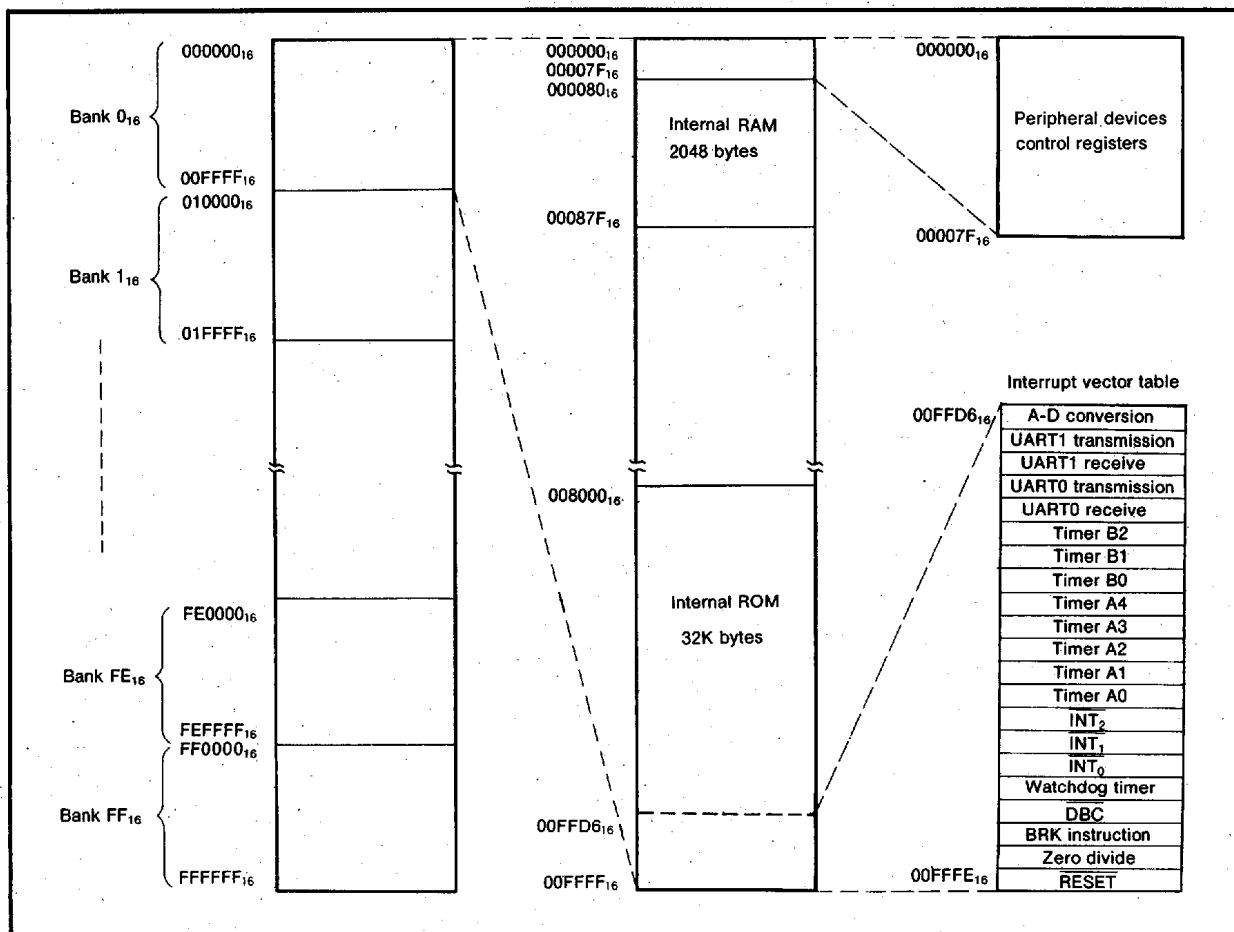


Fig. 1 Memory map

MITSUBISHI MICROCOMPUTERS
M37702M4AXXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Conditions	Rating	Unit
V_{CC}	Supply voltage		-0.3 ~ 7	V
AV_{CC}	Analog supply voltage		-0.3 ~ 7	V
V_I	Input voltage RESET, CNV _{SS} , BYTE		-0.3 ~ 12	V
V_I	Input voltage P0~P07, P1~P17, P2~P27, P3~P33, P4~P47, P5~P57, P6~P67, P7~P77, P8~P87, V _{REF} , X _{IN}		-0.3 ~ $V_{CC} + 0.3$	V
V_O	Output voltage P0~P07, P1~P17, P2~P27, P3~P33, P4~P47, P5~P57, P6~P67, P7~P77, P8~P87, X _{OUT} , $\bar{E}$		-0.3 ~ $V_{CC} + 0.3$	V
P_d	Power dissipation	$T_a = 25^\circ\text{C}$	300	mW
T_{opr}	Operating temperature		-20 ~ 85	$^\circ\text{C}$
T_{stg}	Storage temperature		-40 ~ 150	$^\circ\text{C}$

RECOMMENDED OPERATING CONDITIONS ($V_{CC} = 5V \pm 10\%$, $T_a = -20 \sim 85^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min.	Typ.	Max.	
V_{CC}	Supply voltage	4.5	5.0	5.5	V
AV_{CC}	Analog supply voltage		V_{CC}		V
V_{SS}	Supply voltage		0		V
AV_{SS}	Analog supply voltage		0		V
V_{IH}	High-level input voltage P0~P07, P3~P33, P4~P47, P5~P57, P6~P67, P7~P77, P8~P87, X _{IN} , RESET, CNV _{SS} , BYTE	$0.8V_{CC}$		V_{CC}	V
V_{IH}	High-level input voltage P1~P17, P2~P27 (in single-chip mode)	$0.8V_{CC}$		V_{CC}	V
V_{IH}	High-level input voltage P1~P17, P2~P27 (in memory expansion mode and microprocessor mode)	$0.5V_{CC}$		V_{CC}	V
V_{IL}	Low-level input voltage P0~P07, P3~P33, P4~P47, P5~P57, P6~P67, P7~P77, P8~P87, X _{IN} , RESET, CNV _{SS} , BYTE	0		$0.2V_{CC}$	V
V_{IL}	Low-level input voltage P1~P17, P2~P27 (in single-chip mode)	0		$0.2V_{CC}$	V
V_{IL}	Low-level input voltage P1~P17, P2~P27 (in memory expansion mode and microprocessor mode)	0		$0.16V_{CC}$	V
$I_{OH(peak)}$	High-level peak output current P0~P07, P1~P17, P2~P27, P3~P33, P4~P47, P5~P57, P6~P67, P7~P77, P8~P87			-10	mA
$I_{OH(avg)}$	High-level average output current P0~P07, P1~P17, P2~P27, P3~P33, P4~P47, P5~P57, P6~P67, P7~P77, P8~P87			-5	mA
$I_{OL(peak)}$	Low-level peak output current P0~P07, P1~P17, P2~P27, P3~P33, P4~P47, P5~P57, P6~P67, P7~P77, P8~P87			10	mA
$I_{OL(avg)}$	Low-level average output current P0~P07, P1~P17, P2~P27, P3~P33, P4~P47, P5~P57, P6~P67, P7~P77, P8~P87			5	mA
$f(X_{IN})$	External clock frequency input			16 25	MHz

Note 1. Average output current is the average value of a 100ms interval.

2. The sum of $I_{OL(peak)}$ for ports P0, P1, P2, P3, and P8 must be 80mA or less,
the sum of $I_{OH(peak)}$ for ports P0, P1, P2, P3, and P8 must be 80mA or less,
the sum of $I_{OL(peak)}$ for ports P4, P5, P6, and P7 must be 80mA or less, and
the sum of $I_{OH(peak)}$ for ports P4, P5, P6, and P7 must be 80mA or less.

6249828 0026235 918



MITSUBISHI MICROCOMPUTERS
M37702M4AXXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

M37702M4AXXXFP

ELECTRICAL CHARACTERISTICS ($V_{CC}=5V$, $V_{SS}=0V$, $T_a=25^\circ C$, $f(X_{IN})=16MHz$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V_{OH}	High-level output voltage $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0$, $P3_1$, $P3_3$, $P4_0 \sim P4_7$, $P5_0 \sim P5_7$, $P6_0 \sim P6_7$, $P7_0 \sim P7_7$, $P8_0 \sim P8_7$	$I_{OH} = -10mA$	3			V
V_{OH}	High-level output voltage $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0$, $P3_1$, $P3_3$	$I_{OH} = -400\mu A$	4.7			V
V_{OH}	High-level output voltage $P3_2$	$I_{OH} = -10mA$	3.1			V
		$I_{OH} = -400\mu A$	4.8			
V_{OH}	High-level output voltage $\bar{E}$	$I_{OH} = -10mA$	3.4			V
		$I_{OH} = -400\mu A$	4.8			
V_{OL}	Low-level output voltage $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0$, $P3_1$, $P3_3$, $P4_0 \sim P4_7$, $P5_0 \sim P5_7$, $P6_0 \sim P6_7$, $P7_0 \sim P7_7$, $P8_0 \sim P8_7$	$I_{OL} = 10mA$			2	V
V_{OL}	Low-level output voltage $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0$, $P3_1$, $P3_3$	$I_{OL} = 2mA$			0.45	V
V_{OL}	Low-level output voltage $P3_2$	$I_{OL} = 10mA$			1.9	V
		$I_{OL} = 2mA$			0.43	
V_{OL}	Low-level output voltage $\bar{E}$	$I_{OL} = 10mA$			1.6	V
		$I_{OL} = 2mA$			0.4	
$V_{T+} - V_{T-}$	Hysteresis $HOLD$, RDY , $TA0_{IN} \sim TA4_{IN}$, $TB0_{IN} \sim TB2_{IN}$, $INT_0 \sim INT_2$, AD_{TRG} , CTS_0 , CTS_1 , CLK_0 , CLK_1		0.4		1	V
$V_{T+} - V_{T-}$	Hysteresis $RESET$		0.2		0.5	V
$V_{T+} - V_{T-}$	Hysteresis X_{IN}		0.1		0.3	V
I_{IH}	High-level input current $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0 \sim P3_3$, $P4_0 \sim P4_7$, $P5_0 \sim P5_7$, $P6_0 \sim P6_7$, $P7_0 \sim P7_7$, $P8_0 \sim P8_7$, X_{IN} , $RESET$, CNV_{SS} , $BYTE$	$V_i = 5V$			5	μA
I_{IL}	Low-level input current $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0 \sim P3_3$, $P4_0 \sim P4_7$, $P5_0 \sim P5_7$, $P6_0 \sim P6_7$, $P7_0 \sim P7_7$, $P8_0 \sim P8_7$, X_{IN} , $RESET$, CNV_{SS} , $BYTE$	$V_i = 0V$			-5	μA
V_{RAM}	RAM hold voltage	When clock is stopped.	2			V
I_{CC}	Power supply current	In single-chip mode output only pin is open and other pins are V_{SS} during reset.	$f(X_{IN})=16MHz$, square waveform	12	24	μA
			$T_a=25^\circ C$ when clock is stopped.		1	
			$T_a=85^\circ C$ when clock is stopped.		20	

A-D CONVERTER CHARACTERISTICS ($V_{CC}=5V$, $V_{SS}=0V$, $T_a=25^\circ C$, $f(X_{IN})=16MHz$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
—	Resolution	$V_{REF} = V_{CC}$			8	Bits
—	Absolute accuracy	$V_{REF} = V_{CC}$			± 3	LSB
R_{LADDER}	Ladder resistance	$V_{REF} = V_{CC}$	2		10	$k\Omega$
t_{CONV}	Conversion time		14.25			μs
V_{REF}	Reference voltage		2		V_{CC}	V
V_{IA}	Analog input voltage		0		V_{REF}	V

6249828 0026236 854

MITSUBISHI MICROCOMPUTERS
M37702M4AXXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

M37702M4BXXFP

ELECTRICAL CHARACTERISTICS ($V_{CC}=5V$, $V_{SS}=0V$, $T_a=25^\circ C$, $f(X_{IN})=25MHz$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V_{OH}	High-level output voltage $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0$, $P3_1$, $P3_3$, $P4_0 \sim P4_7$, $P5_0 \sim P5_7$, $P6_0 \sim P6_7$, $P7_0 \sim P7_7$, $P8_0 \sim P8_7$	$I_{OH} = -10mA$	3			V
V_{OH}	High-level output voltage $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0$, $P3_1$, $P3_3$	$I_{OH} = -400\mu A$	4.7			V
V_{OH}	High-level output voltage $P3_2$	$I_{OH} = -10mA$ $I_{OH} = -400\mu A$	3.1 4.8			V
V_{OH}	High-level output voltage $\bar{E}$	$I_{OH} = -10mA$ $I_{OH} = -400\mu A$	3.4 4.8			V
V_{OL}	Low-level output voltage $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0$, $P3_1$, $P3_3$, $P4_0 \sim P4_7$, $P5_0 \sim P5_7$, $P6_0 \sim P6_7$, $P7_0 \sim P7_7$, $P8_0 \sim P8_7$	$I_{OL} = 10mA$			2	V
V_{OL}	Low-level output voltage $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0$, $P3_1$, $P3_3$	$I_{OL} = 2mA$			0.45	V
V_{OL}	Low-level output voltage $P3_2$	$I_{OL} = 10mA$ $I_{OL} = 2mA$			1.9 0.43	V
V_{OL}	Low-level output voltage $\bar{E}$	$I_{OL} = 10mA$ $I_{OL} = 2mA$			1.6 0.4	V
$V_{T+} - V_{T-}$	Hysteresis $HOLD$, RDY , $TA0_{IN} \sim TA4_{IN}$, $TB0_{IN} \sim TB2_{IN}$, $INT_0 \sim INT_2$, AD_{TRG} , CTS_0 , CTS_1 , CLK_0 , CLK_1		0.4		1	V
$V_{T+} - V_{T-}$	Hysteresis $RESET$		0.2		0.5	V
$V_{T+} - V_{T-}$	Hysteresis X_{IN}		0.1		0.3	V
I_{IH}	High-level input current $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0 \sim P3_3$, $P4_0 \sim P4_7$, $P5_0 \sim P5_7$, $P6_0 \sim P6_7$, $P7_0 \sim P7_7$, $P8_0 \sim P8_7$, X_{IN} , $RESET$, CNV_{SS} , $BYTE$	$V_i = 5V$			5	μA
I_{IL}	Low-level input current $P0_0 \sim P0_7$, $P1_0 \sim P1_7$, $P2_0 \sim P2_7$, $P3_0 \sim P3_3$, $P4_0 \sim P4_7$, $P5_0 \sim P5_7$, $P6_0 \sim P6_7$, $P7_0 \sim P7_7$, $P8_0 \sim P8_7$, X_{IN} , $RESET$, CNV_{SS} , $BYTE$	$V_i = 0V$			-5	μA
V_{RAM}	RAM hold voltage	When clock is stopped.	2			V
I_{CC}	Power supply current	In single-chip mode output only pin is open and other pins are V_{SS} during reset.	$f(X_{IN})=25MHz$, square waveform $T_a=25^\circ C$ when clock is stopped. $T_a=85^\circ C$ when clock is stopped.	19	38 1 20	 μA

A-D CONVERTER CHARACTERISTICS ($V_{CC}=5V$, $V_{SS}=0V$, $T_a=25^\circ C$, $f(X_{IN})=25MHz$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
—	Resolution	$V_{REF} = V_{CC}$			8	Bits
—	Absolute accuracy	$V_{REF} = V_{CC}$			± 3	LSB
R_{LADDER}	Ladder resistance	$V_{REF} = V_{CC}$	2		10	$k\Omega$
t_{CONV}	Conversion time		9.12			μs
V_{REF}	Reference voltage		2		V_{CC}	V
V_{IA}	Analog input voltage		0		V_{REF}	V

6249828 0026237 790

MITSUBISHI MICROCOMPUTERS
M37702M4AXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

TIMING REQUIREMENTS ($V_{CC}=5V \pm 10\%$, $V_{SS}=0V$, $T_a=25^\circ C$, unless otherwise noted)

External clock input

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
t _C	External clock input cycle time	62		40		ns
t _{W(H)}	External clock input high-level pulse width	25		15		ns
t _{W(L)}	External clock input low-level pulse width	25		15		ns
t _r	External clock rise time		10		8	ns
t _f	External clock fall time		10		8	ns

Single-chip mode

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
t _{SU} (P0D—E)	Port P0 input setup time	100		60		ns
t _{SU} (P1D—E)	Port P1 input setup time	100		60		ns
t _{SU} (P2D—E)	Port P2 input setup time	100		60		ns
t _{SU} (P3D—E)	Port P3 input setup time	100		60		ns
t _{SU} (P4D—E)	Port P4 input setup time	100		60		ns
t _{SU} (P5D—E)	Port P5 input setup time	100		60		ns
t _{SU} (P6D—E)	Port P6 input setup time	100		60		ns
t _{SU} (P7D—E)	Port P7 input setup time	100		60		ns
t _{SU} (P8D—E)	Port P8 input setup time	100		60		ns
t _H (E—P0D)	Port P0 input hold time	0		0		ns
t _H (E—P1D)	Port P1 input hold time	0		0		ns
t _H (E—P2D)	Port P2 input hold time	0		0		ns
t _H (E—P3D)	Port P3 input hold time	0		0		ns
t _H (E—P4D)	Port P4 input hold time	0		0		ns
t _H (E—P5D)	Port P5 input hold time	0		0		ns
t _H (E—P6D)	Port P6 input hold time	0		0		ns
t _H (E—P7D)	Port P7 input hold time	0		0		ns
t _H (E—P8D)	Port P8 input hold time	0		0		ns

Memory expansion mode and microprocessor mode

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
$t_{SU}(P1D-E)$	Port P1 input setup time	45		30		ns
$t_{SU}(P2D-E)$	Port P2 input setup time	45		30		ns
$t_{SU}(RDY-\phi_1)$	RDY input setup time	60		55		ns
$t_{SU}(HOLD-\phi_1)$	HOLD input setup time	60		55		ns
$t_H(E-P1D)$	Port P1 input hold time	0		0		ns
$t_H(E-P2D)$	Port P2 input hold time	0		0		ns
$t_H(\phi_1-RDY)$	RDY input hold time	0		0		ns
$t_H(\phi_1-HOLD)$	HOLD input hold time	0		0		ns

MITSUBISHI MICROCOMPUTERS
M37702M4AXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

Timer A input (Count input in event counter mode)

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
t _{C(TA)}	TA _{IN} input cycle time	125		80		ns
t _{W(TAH)}	TA _{IN} input high-level pulse width	62		40		ns
t _{W(TAL)}	TA _{IN} input low-level pulse width	62		40		ns

Timer A input (Gating input in timer mode)

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
t _{C(TA)}	TA _{IN} input cycle time	500		320		ns
t _{w(TAH)}	TA _{IN} input high-level pulse width	250		160		ns
t _{w(TAL)}	TA _{IN} input low-level pulse width	250		160		ns

Timer A input (External trigger input in one-shot pulse mode)

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
$t_{C(TA)}$	TA_{IN} input cycle time	250		160		ns
$t_{W(TAH)}$	TA_{IN} input high-level pulse width	125		80		ns
$t_{W(TAL)}$	TA_{IN} input low-level pulse width	125		80		ns

Timer A input (External trigger input in pulse width modulation mode)

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
$t_{W(TAH)}$	TA_{IN} input high-level pulse width	125		80		ns
$t_{W(TAL)}$	TA_{IN} input low-level pulse width	125		80		ns

Timer A input (Up-down input in event counter mode)

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
t _{C(UP)}	TA _{OUT} input cycle time	2500		2000		ns
t _{W(UPH)}	TA _{OUT} input high-level pulse width	1250		1000		ns
t _{W(UPL)}	TA _{OUT} input low-level pulse width	1250		1000		ns
t _{SU(UP-T_{IN})}	TA _{OUT} input setup time	500		400		ns
t _{H(T_{IN}-UP)}	TA _{OUT} input hold time	500		400		ns

6249828 0026239 563

MITSUBISHI MICROCOMPUTERS
M37702M4AXXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

Timer B input (Count input in event counter mode)

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
t _{C(TB)}	TB _{IN} input cycle time (one edge count)	125		80		ns
t _{W(TBH)}	TB _{IN} input high-level pulse width (one edge count)	62		40		ns
t _{W(TBL)}	TB _{IN} input low-level pulse width (one edge count)	62		40		ns
t _{C(TB)}	TB _{IN} input cycle time (both edges count)	250		160		ns
t _{W(TBH)}	TB _{IN} input high-level pulse width (both edges count)	125		80		ns
t _{W(TBL)}	TB _{IN} input low-level pulse width (both edges count)	125		80		ns

Timer B input (Pulse period measurement mode)

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
t _{C(TB)}	TB _{IN} input cycle time	500		320		ns
t _{W(TBH)}	TB _{IN} input high-level pulse width	250		160		ns
t _{W(TBL)}	TB _{IN} input low-level pulse width	250		160		ns

Timer B input (Pulse width measurement mode)

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
t _{C(TB)}	TB _{IN} input cycle time	500		320		ns
t _{W(TBH)}	TB _{IN} input high-level pulse width	250		160		ns
t _{W(TBL)}	TB _{IN} input low-level pulse width	250		160		ns

A-D trigger input

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
t _{C(AD)}	AD _{TRG} input cycle time (minimum allowable trigger)	1000		1000		ns
t _{W(ADL)}	AD _{TRG} input low-level pulse width	125		125		ns

Serial I/O

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
t _{C(CK)}	CLK _i input cycle time	250		200		ns
t _{W(CKH)}	CLK _i input high-level pulse width	125		100		ns
t _{W(CKL)}	CLK _i input low-level pulse width	125		100		ns
t _{d(C-Q)}	TxD _i output delay time		90		80	ns
t _{h(C-Q)}	TxD _i hold time	0		0		ns
t _{su(D-C)}	RxD _i input setup time	30		20		ns
t _{h(C-D)}	RxD _i input hold time	90		90		ns

External interrupt INT_i input

Symbol	Parameter	Limits				Unit
		16MHz		25MHz		
		Min.	Max.	Min.	Max.	
t _{W(INH)}	INT _i input high-level pulse width	250		250		ns
t _{W(INL)}	INT _i input low-level pulse width	250		250		ns

MITSUBISHI MICROCOMPUTERS
M37702M4AXXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

SWITCHING CHARACTERISTICS ($V_{CC}=5V \pm 10\%$, $V_{SS}=0V$, $T_a=25^\circ C$, unless otherwise noted)

Single-chip mode

Symbol	Parameter	Test conditions	Limits				Unit
			16MHz		25MHz		
			Min.	Max.	Min.	Max.	
$t_{d(E-P0Q)}$	Port P0 data output delay time	Fig. 2		100		80	ns
$t_{d(E-P1Q)}$	Port P1 data output delay time			100		80	ns
$t_{d(E-P2Q)}$	Port P2 data output delay time			100		80	ns
$t_{d(E-P3Q)}$	Port P3 data output delay time			100		80	ns
$t_{d(E-P4Q)}$	Port P4 data output delay time			100		80	ns
$t_{d(E-P5Q)}$	Port P5 data output delay time			100		80	ns
$t_{d(E-P6Q)}$	Port P6 data output delay time			100		80	ns
$t_{d(E-P7Q)}$	Port P7 data output delay time			100		80	ns
$t_{d(E-P8Q)}$	Port P8 data output delay time			100		80	ns

Memory expansion mode and microprocessor mode (when wait bit = "1")

Symbol	Parameter	Test conditions	Limits				Unit
			16MHz		25MHz		
			Min.	Max.	Min.	Max.	
$t_d(P0A-E)$	Port P0 address output delay time	Fig. 2	30		12		ns
$t_d(E-P1Q)$	Port P1 data output delay time (BYTE="L")			70		45	ns
$t_{PXZ}(E-P1Z)$	Port P1 floating start delay time (BYTE="L")			5		5	ns
$t_d(P1A-E)$	Port P1 address output delay time		30		12		ns
$t_d(P1A-ALE)$	Port P1 address output delay time		24		5		ns
$t_d(E-P2Q)$	Port P2 data output delay time			70		45	ns
$t_{PXZ}(E-P2Z)$	Port P2 floating start delay time			5		5	ns
$t_d(P2A-E)$	Port P2 address output delay time		30		12		ns
$t_d(P2A-ALE)$	Port P2 address output delay time		24		5		ns
$t_d(\phi_1-HLDA)$	HLDA output delay time			50		50	ns
$t_d(ALE-E)$	ALE output delay time		4		4		ns
$t_W(ALE)$	ALE pulse width		35		22		ns
$t_d(BHE-E)$	BHE output delay time		30		20		ns
$t_d(R/W-E)$	R/W output delay time		30		20		ns
$t_d(E-\phi_1)$	ϕ_1 output delay time		0	20	0	18	ns
$t_h(E-P0A)$	Port P0 address hold time		25		18		ns
$t_h(ALE-P1A)$	Port P1 address hold time (BYTE="L")		9		9		ns
$t_h(E-P1Q)$	Port P1 data hold time (BYTE="L")		25		18		ns
$t_{P2X}(E-P1Z)$	Port P1 floating release delay time (BYTE="L")		25		18		ns
$t_h(E-P1A)$	Port P1 address hold time (BYTE="H")		25		18		ns
$t_h(ALE-P2A)$	Port P2 address hold time		9		9		ns
$t_h(E-P2Q)$	Port P2 data hold time		25		18		ns
$t_{P2X}(E-P2Z)$	Port P2 floating release delay time		25		18		ns
$t_h(E-BHE)$	BHE hold time		18		18		ns
$t_h(E-R/W)$	R/W hold time		18		18		ns
$t_W(EL)$	$\bar{E}$ pulse width		95		50		ns

6249828 0026241 111

MITSUBISHI MICROCOMPUTERS
M37702M4AXXXFP, M37702M4BXXFP
M37702S4AFP, M37702S4BFP

SINGLE-CHIP 16-BIT CMOS MICROCOMPUTER

Memory expansion mode and microprocessor mode (when wait bit = "0", and external memory area accessed)

Symbol	Parameter	Test conditions	Limits				Unit
			16MHz		25MHz		
			Min.	Max.	Min.	Max.	
$t_d(P0A-E)$	Port P0 address output delay time	Fig. 2	30		12		ns
$t_d(E-P1Q)$	Port P1 data output delay time (BYTE="L")			70		45	ns
$t_{PXZ}(E-P1Z)$	Port P1 floating start delay time (BYTE="L")			5		5	ns
$t_d(P1A-E)$	Port P1 address output delay time		30		12		ns
$t_d(P1A-ALE)$	Port P1 address output delay time		24		5		ns
$t_d(E-P2Q)$	Port P2 data output delay time			70		45	ns
$t_{PXZ}(E-P2Z)$	Port P2 floating start delay time			5		5	ns
$t_d(P2A-E)$	Port P2 address output delay time		30		12		ns
$t_d(P2A-ALE)$	Port P2 address output delay time		24		5		ns
$t_d(\phi_1-HLDA)$	HLDA output delay time			50		50	ns
$t_d(ALE-E)$	ALE output delay time		4		4		ns
$t_W(ALE)$	ALE pulse width		35		22		ns
$t_d(BHE-E)$	BHE output delay time		30		20		ns
$t_d(R/W-E)$	R/W output delay time		30		20		ns
$t_d(E-\phi_1)$	ϕ_1 output delay time		0	20	0	18	ns
$t_h(E-P0A)$	Port P0 address hold time		25		18		ns
$t_h(ALE-P1A)$	Port P1 address hold time (BYTE="L")		9		9		ns
$t_h(E-P1Q)$	Port P1 data hold time (BYTE="L")		25		18		ns
$t_{PZX}(E-P1Z)$	Port P1 floating release delay time (BYTE="L")		25		18		ns
$t_h(E-P1A)$	Port P1 address hold time (BYTE="H")		25		18		ns
$t_h(ALE-P2A)$	Port P2 address hold time		9		9		ns
$t_h(E-P2Q)$	Port P2 data hold time		25		18		ns
$t_{PZX}(E-P2Z)$	Port P2 floating release delay time		25		18		ns
$t_h(E-BHE)$	BHE hold time		18		18		ns
$t_h(E-R/W)$	R/W hold time		18		18		ns
$t_W(EL)$	$\bar{E}$ pulse width		220		130		ns

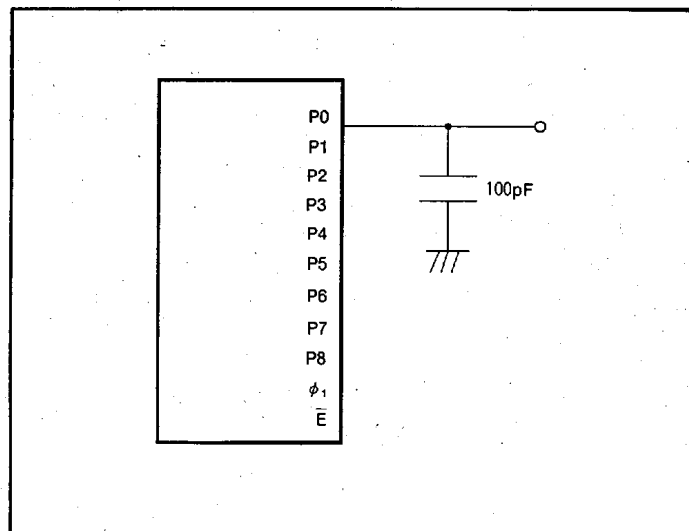


Fig. 2 Testing circuit for ports P0~P8, ϕ_1