TOTAL POWER INT'L MIW1300 Series

3 Watts 3:1 Wide Input Range DC/DC Converters

Single and Dual Outputs

Key Features

- High Efficiency up to 81%
- 3:1 Input Range
- Industry Standard Pinout
- SMT Technology
- I/O Isolation 1000VDC
- Short Circuit Protection
- EMI Complies With EN55022 Class A
- MTBF > 1,000,000 Hours



MIW1300—Series power modules are low—profile dc—dc converters that operate over an input voltage range of 10–30VDC and provide precisely regulated output voltages of 5V and 12V in both single and dual output configurations.

The -25°C to +75°C operating temperature range makes it ideal for data communication equipments, mobile battery driven equipments, distributed power systems, telecommunication equipments, mixed analog/digital subsystems, process/machine control equipments, computer peripheral systems and industrial robot systems.

The modules have a maximum power rating of 3W and a typical full—load efficiency of 80%, continuous short circuit, 60mA output ripple, built—in filtering for both input and output minimizes the need for external filtering.











Block Diagram

Single Output



Dual Output



Model Selection Guide

Model Number	Input Voltage	Output Voltage	Output Current		Input Current		Output Current Input Current Reflected Ripple Current			Efficiency
			Max. Min. (@Max. Load @No Load			@Max. Load		
	VDC	VDC	mA	mA	mA (Typ.)	mA (Typ.)	mA (Typ.)	% (Typ.)		
MIW1322		5	600	60	188			80		
MIW1323	22	12	250	<i>25</i>	188			80		
MIW1324	20 (10 ~ 30)	<i>15</i>	200	20	188	5	20	80		
MIW1326	(10 00)	±12	±125	±12.5	188			80		
MIW1327		±15	±100	±10	188			80		

Absolute Maximum Ratings

Parameter	Min.	Мах.	Unit
Input Surge Voltage	-0.7	50	VDC
Lead Temperature (1.5mm from case for 10 Sec.)		260	${\mathscr C}$
Internal Power Dissipation		2,500	mW

Exceeding these values can damage the module. These are not continuous operating ratings.

Environmental Specifications

Parameter	Conditions	Min.	Мах.	Unit	
Operating Temperature	Ambient	- 25	+75	$\mathcal C$	
Operating Temperature	Case	-40	+90	${\mathscr C}$	
Storage Temperature		-40	+125	${\mathscr C}$	
Humidity			95	%	
Cooling	Free-Air Convection				
Conducted EMI	EN55022 Class A				

Note:

- 1. Specifications typical at Ta=+25°C, resistive load, nominal input voltage, rated output current unless otherwise noted.
- 2. Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%
- 3. Ripple & Noise measurement bandwidth is 0-20 MHz
- 4. These power converters require a minimum output loading to maintain specified regulation.
- Operation under no-load conditions will not damage these devices; however they may not meet all listed specifications.
- 6. All DC/DC converters should be externally fused at the front end for protection.
- 7. Other input and output voltage may be available, please contact factory.
- 8. Specifications subject to change without notice.

Input Specifications

Parameter	Model	Min.	Тур.	Мах.	Unit
Start Voltage		4.5	7	9	VDC
Under Voltage Shortdown			6.5	8.5	VDC
Reverse Polarity Input Current	All Models			1	А
Short Circuit Input Power			1000	1500	mW
Input Filter		Pi Filter			

Output Specifications

Parameter	Conditions	Min.	Тур.	Мах.	Unit
Output Voltage Accuracy			±0.5	±2.0	%
Output Voltage Balance	Dual Output Balance Load		±0.5	±2.0	%
Line Regulation	Vin=Min. to Max.		±0.2	±0.5	%
Load Regulation	Io=10% to 100%		±0.2	±0.5	%
Ripple & Noise (20MHz)			45	60	mV P-P
Ripple & Noise (20MHz)	Over Line,Load & Temp			80	mV P-P
Ripple & Noise (20MHz)				28	mV rms.
Over Power Protection		120			%
Transient Recovery Time	Transient Recovery Time 25% Load Step Change		300	500	uS
Transient Response Deviation	25% Load Step Change		±3	±5	%
Temperature Coefficient			±0.01	±0.05	%/°C
Output Short Circuit	Continuous				

General Specifications

Parameter	Conditions		Тур.	Мах.	Unit
Isolation Voltage	60 Seconds	1000			VDC
Isolation Test Voltage	Flash Tested for 1 Second	1100			VDC
Isolation Resistance	500VDC	1000			$M\Omega$
Isolation Capacitance	100KHz,1V			500	ρF
Switching Frequency			300		KHz
MTBF	MIL-HDBK-217F @ 25°C, Ground Benign	1000			K Hours

Capacitive Load


Models by Vout	5V	12V	15V	±12V #	±15V #	Unit
Maximum Capacitive Load	4000	4000	4000	470	470	uF


Note: # For each output .


Input Fuse Selection Guide



Input Voltage Transient Rating

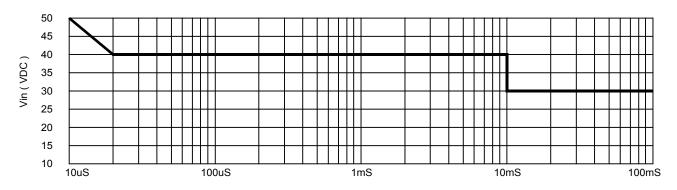





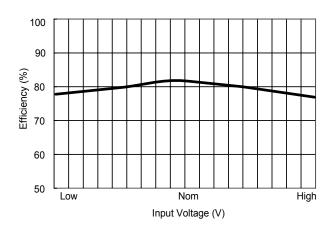

Efficiency vs Input Voltage (Single Output)


Efficiency vs Input Voltage (Dual Output)





Efficiency vs Output Load (Single Output)


Efficiency vs Output Load (Dual Output)

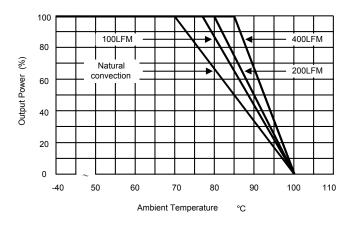

Derating Curve

Test Configurations

Input Reflected-Ripple Current Test Setup




Input reflected—ripple current is measured with a inductor Lin (4.7uH) and Cin (220uF, ESR < 1.0 Ω at 100 KHz) to simulate source impedance.

Capacitor Cin, offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0–500 KHz.

Peak-to-Peak Output Noise Measurement Test

Use a Cout 0.47uF ceramic capacitor.

Scope measurement should be made by using a BNC socket, measurement bandwidth is 0–20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.



Design & Feature Considerations

Maximum Capacitive Load

The MIW1300 series has limitation of maximum connected capacitance at the output.

The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time.

For optimum performance we recommend 470uF maximum capacitive load for dual outputs and 4000uF capacitive load for single outputs.

The maximum capacitance can be found in the data.

Overcurrent Protection


To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current–limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.

In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.


Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 KHz) capacitor of a 3.3uF for the devices.




Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance.

To reduce output ripple, it is recommended to use 3.3uF capacitors at the output.







Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 90°C.

The derating curves are determined from measurements obtained in an experimental apparatus.




Mechanical Data

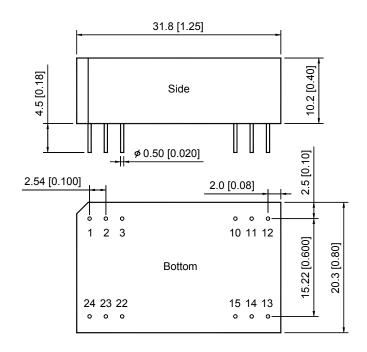


Connecting Pin Patterns Top View (2.54 mm / 0.1 inch grids)

Single Output



Dual Output



Tolerance Millimeters Inches .XX±0.01 .X±0.25 .XXX±0.01 .XX±0.25

Pin ±0.05 ±0.002

Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	NC	-Vout
3	NC	Common
10	-Vout	Common
11	+Vout	+Vout
12	-Vin	-Vin
13	-Vin	-Vin
14	+Vout	+Vout
15	-Vout	Common
22	NC	Common
23	NC	-Vout
24	+Vin	+Vin

NC: No Connection

Physical Characteristics

31.8×20.3×10.2 mm Case Size 1.25×0.8×0.4 inches

Case Material : Non-Conductive Black Plastic

Weight 12.4g

Flammability : UL94V-0