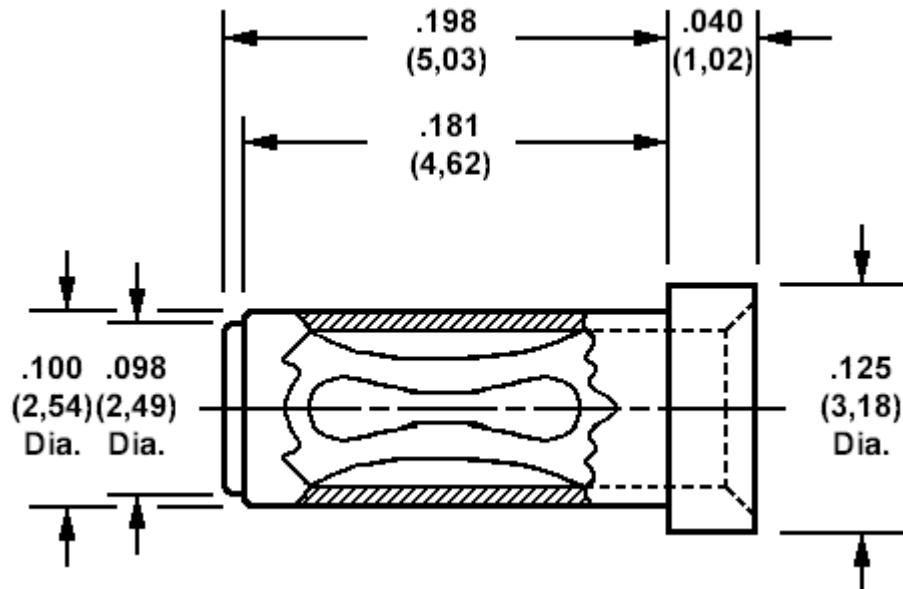


450-3783 Guided entry socket, solder mount, for .040 (1,02) diameter pinsRecommended mounting hole .104 (2,64) $\pm$.002 (0,05), #37 drill

Min hole depth .209 (5,33).

How to order code**450-3783-01-XX-00**

Basic Part No XX = Finish

MATERIALS				
Component	Material	Finish(-03)	Finish(-04)	Finish(-06)
Body	Brass	Gold over Nickel	Tin	Tin
Spring	Beryllium copper	Gold over Nickel	Tin	Gold over Nickel