


447-711 Composite EMI/RFI Banding Backshell with Strain Relief and Self-Locking Rotatable Coupling



Composite
Backshells

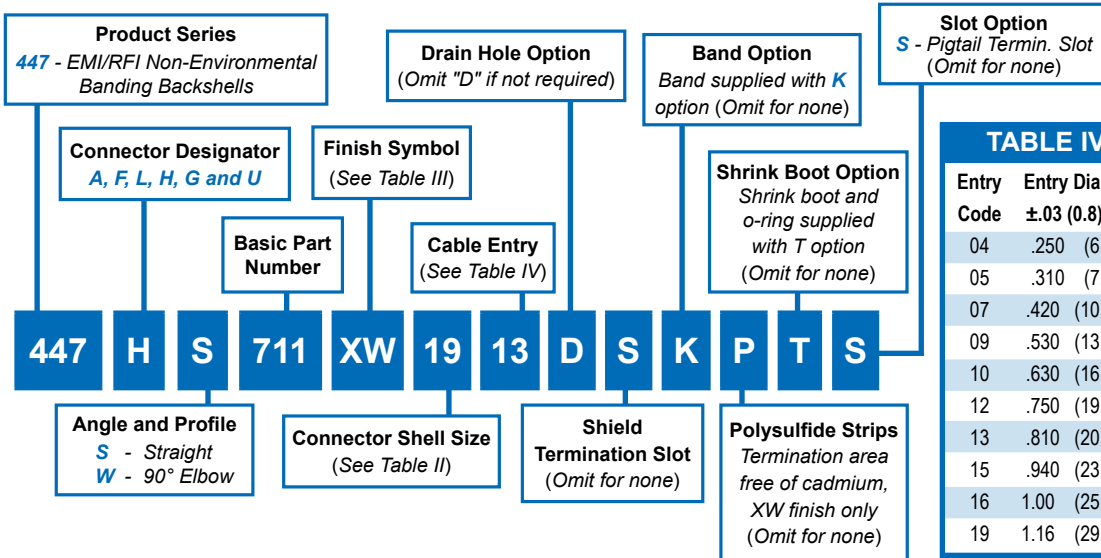

NOTE: Coupling Nut Supplied Unplated

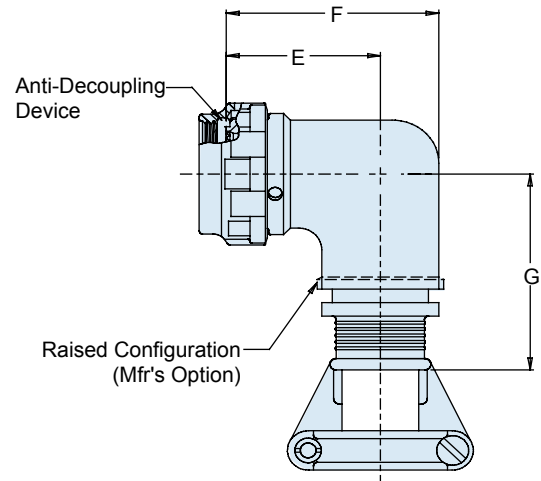
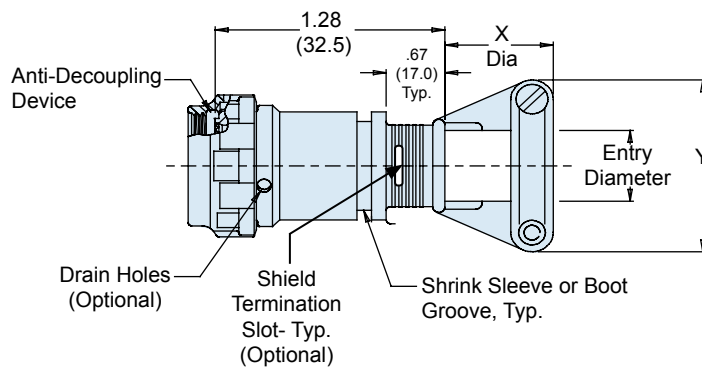


TABLE II: CONNECTOR SHELL SIZE

Shell Size For Connector Designator*					E		F		G		Max Entry
A	F/L	H	G	U	± .06	(1.5)	± .09	(2.3)	± .09	(2.3)	Dash No.**
08	08	09	-	-	.69	(17.5)	.88	(22.4)	1.36	(34.5)	04
10	10	11	-	08	.75	(19.1)	1.00	(25.4)	1.42	(36.1)	05
12	12	13	11	10	.81	(20.6)	1.13	(28.7)	1.48	(37.6)	07
14	14	15	13	12	.88	(22.4)	1.31	(33.3)	1.55	(39.4)	09
16	16	17	15	14	.94	(23.9)	1.38	(35.1)	1.61	(40.9)	11
18	18	19	17	16	.97	(24.6)	1.44	(36.6)	1.64	(41.7)	13
20	20	21	19	18	1.06	(26.9)	1.63	(41.4)	1.73	(43.9)	15
22	22	23	-	20	1.13	(28.7)	1.75	(44.5)	1.80	(45.7)	17
24	24	25	23	22	1.19	(30.2)	1.88	(47.8)	1.86	(47.2)	20

**Consult factory for additional entry sizes available.

Consult factory for O-Ring to be supplied with part less shrink boot.

TABLE III: FINISH

Symbol	Finish Description
XM	2000 Hour Corrosion Resistant Electroless Nickel
XMT	2000 Hour Corrosion Resistant Ni-PTFE, Nickel-Fluorocarbon Polymer. 1000 Hour Grey™
XW	2000 Hour Corrosion Resistant Cadmium/ Olive Drab over Electroless Nickel

A