

447-425





EMI/RFI Non-Environmental Band-in-a-Can Backshell

with Cable Clamp Strain-Relief

Rotatable Coupling - Full Radius Profile

CONNECTOR DESIGNATORS A-F-H-L-S

ROTATABLE COUPLING

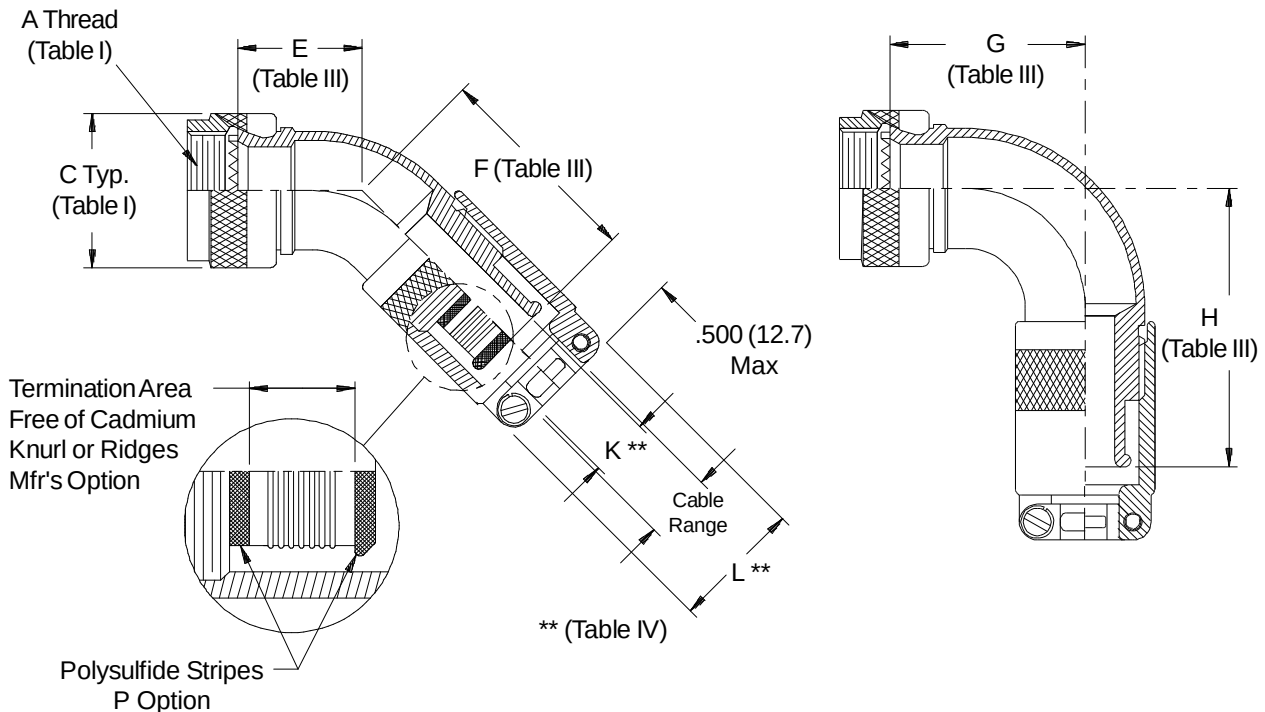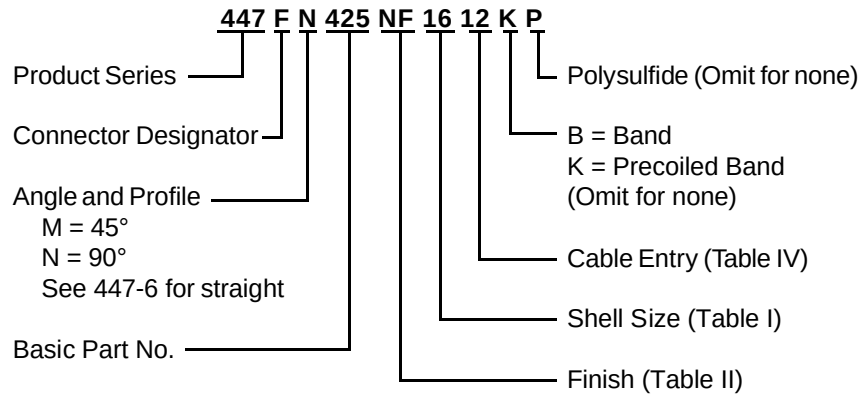

Band Option
(K Option Shown -
See Note 3)

See inside back cover fold-out or pages 13 and 14 for Tables I and II.

TABLE III: ELBOW DIMENSIONS

Shell Size Conn. Desig. A-F-L-S H		E Max	F Max	G Max	H Max
08	09	.817 (20.8)	1.057 (26.8)	1.125 (28.6)	1.375 (34.9)
10	11	.861 (21.9)	1.111 (28.2)	1.250 (31.8)	1.500 (38.1)
12	13	.911 (23.1)	1.161 (29.5)	1.375 (34.9)	1.625 (41.3)
14	15	.965 (24.5)	1.215 (30.9)	1.500 (38.1)	1.750 (44.5)
16	17	1.014 (25.8)	1.264 (32.1)	1.625 (41.3)	1.875 (47.6)
18	19	1.064 (27.0)	1.314 (33.4)	1.750 (44.5)	2.000 (50.8)
20	21	1.118 (28.4)	1.368 (34.7)	1.875 (47.6)	2.125 (54.0)
22	23	1.172 (29.8)	1.422 (36.1)	2.000 (50.8)	2.250 (57.2)
24	25	1.221 (31.0)	1.471 (37.4)	2.125 (54.0)	2.375 (60.3)

TABLE IV: CABLE RANGE

Dash No.	K		L Max	Cable Range			
	±.030	±(.8)		Min		Max	
10	.220	(5.6)	1.000 (25.4)	.130	(3.3)	.250	(6.4)
12	.310	(7.9)	1.250 (31.8)	.250	(6.4)	.380	(9.7)
14	.440	(11.2)	1.340 (34.0)	.310	(7.9)	.440	(11.2)
16	.560	(14.2)	1.470 (37.3)	.375	(9.5)	.630	(16.0)
18	.630	(16.0)	1.560 (39.6)	.560	(14.2)	.690	(17.5)
20	.750	(19.1)	1.620 (41.1)	.630	(16.0)	.750	(19.1)
22	.880	(22.4)	1.750 (44.5)	.750	(19.1)	.880	(22.4)
24	1.000	(25.4)	1.870 (47.5)	.880	(22.4)	1.000	(25.4)
28	1.060	(26.9)	1.970 (50.0)	1.000	(25.4)	1.130	(28.7)
32	1.190	(30.2)	2.090 (53.1)	1.130	(28.7)	1.250	(31.8)

1. When maximum cable entry (page 21) is exceeded, Style 2 will be supplied. Dimensions E, F, G, and H will not apply. Please consult factory.
2. Metric dimensions (mm) are indicated in parentheses.
3. Backshells supplied with 600-052-* band, see Glenair Series 600 Tool Catalog for installation.