

RELAY DRIVERS, LAMP DRIVERS,
MOTOR DRIVERS, STROBES APPLICATION.


FEATURES

- Adoption of MBIT Processes.
- High Current Capacitance.
- Low Collector-to-Emitter Saturation Voltage.
- High-Speed Switching.
- Ultrasmall-sized Package Permitting Applied sets to be made small and slim.
- High Allowable Power Dissipation.
- Complementary to KTC3543T.


MAXIMUM RATING (Ta=25℃)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	-30	V
Collector-Emitter Voltage		V_{CEO}	-30	V
Emitter-Base Voltage		V_{EBO}	-6	V
Collector Current	DC	I_C	-5	A
	Pulse	I_{CP}	-7	
Base Current		I_B	-1.2	A
Collector Power Dissipation		P_C *	0.9	W
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-55 ~ 150	°C

* Package mounted on a ceramic board ($600\text{mm}^2 \times 0.8\text{mm}$)

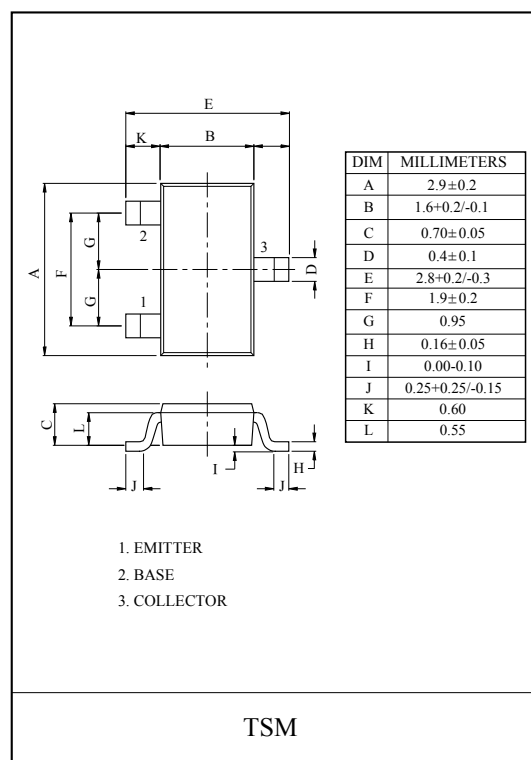







Marking

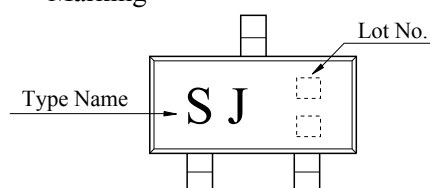

ELECTRICAL CHARACTERISTICS (Ta=25 °C)


CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CBO}	$V_{CB}=-30V, I_E=0$	-	-	-0.1	μA
Emitter Cut-off Current		I_{EBO}	$V_{EB}=-4V, I_C=0$	-	-	-0.1	μA
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C=-10\mu A, I_E=0$	-30	-	-	V
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=-1mA, I_B=0$	-30	-	-	V
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	$I_E=-10\mu A, I_C=0$	-6	-	-	V
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=-2.5A, I_B=-50mA$	-	-140	-210	mV
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=-2.5A, I_B=-50mA$	-	-0.81	-1.2	V
DC Current Gain		h_{FE}	$V_{CE}=-2V, I_C=-500mA$	200	-	560	
Transition Frequency		f_T	$V_{CE}=-10V, I_C=-500mA$	-	250	-	MHz
Collector Output Capacitance		C_{ob}	$V_{CB}=-10V, f=1MHz$	-	52	-	pF
Switching Time	Turn-On Time	t_{on}	$PW=20\mu s$ $DC \leq 1\%$ I_{B1} I_{B2} R_B 50Ω V_R $100\mu F$ $V_{BE}=5V$ $470\mu F$ $V_{CC}=-12V$ $-20I_{B1}=20I_{B2}=I_C=-2.5A$	-	30	-	nS
	Storage Time	t_{stg}		-	190	-	
	Fall Time	t_f		-	17	-	

KTA1543T

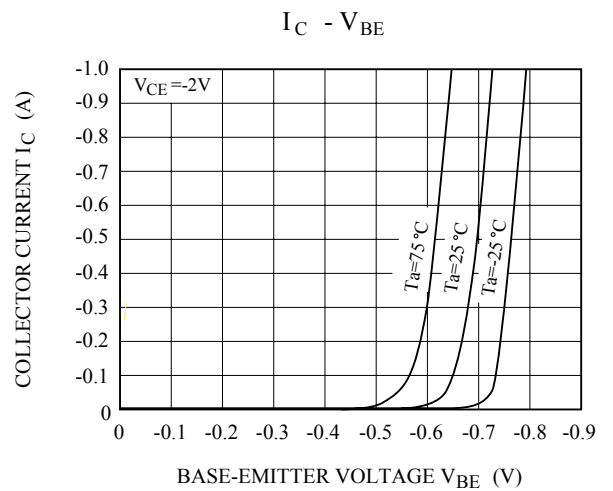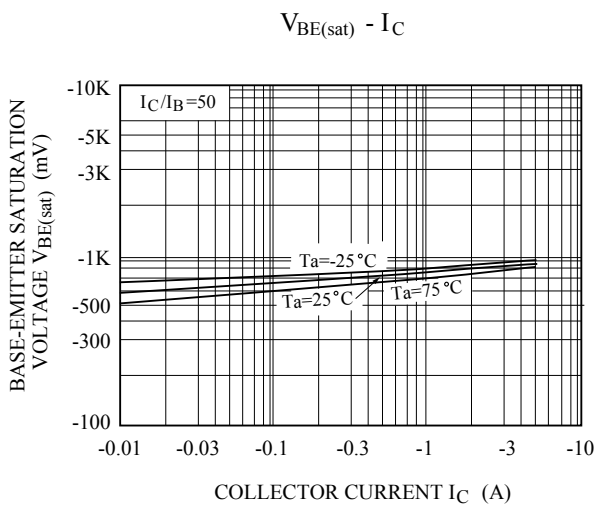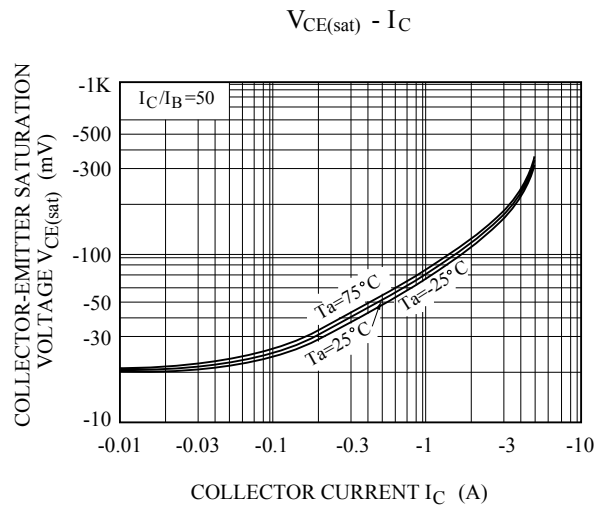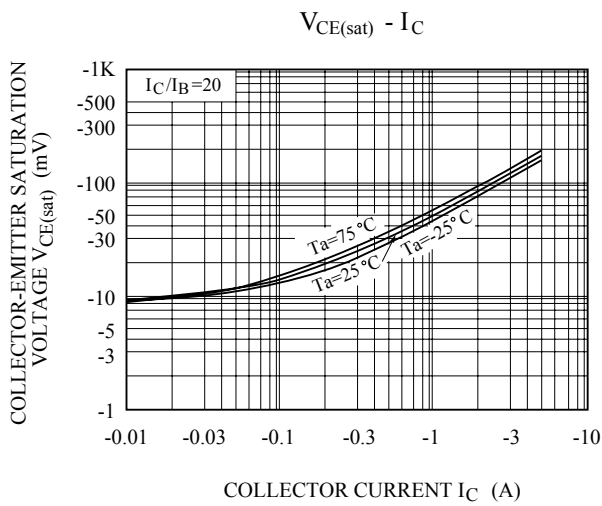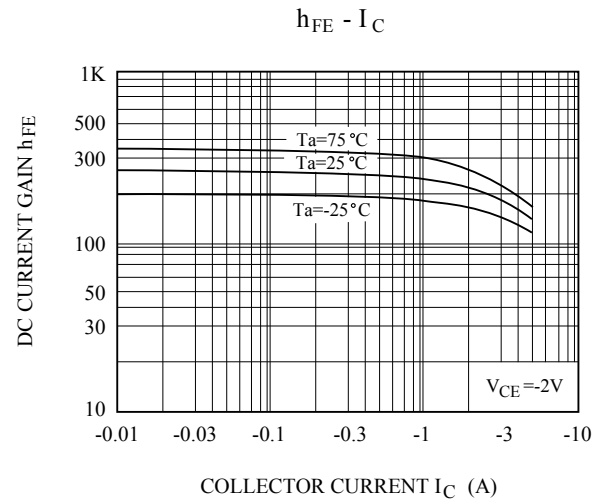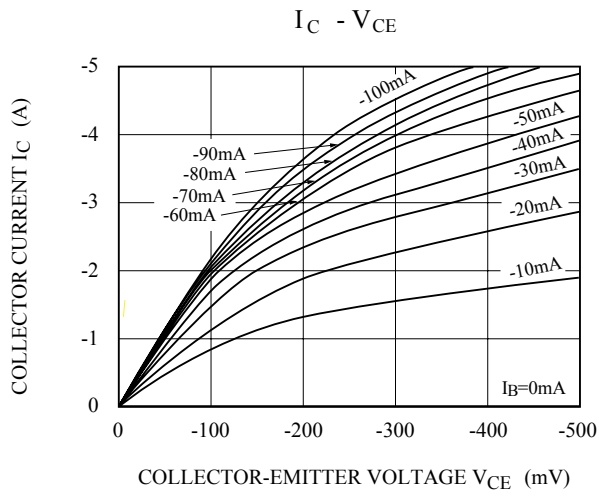


KTA1543T


$f_T - I_C$

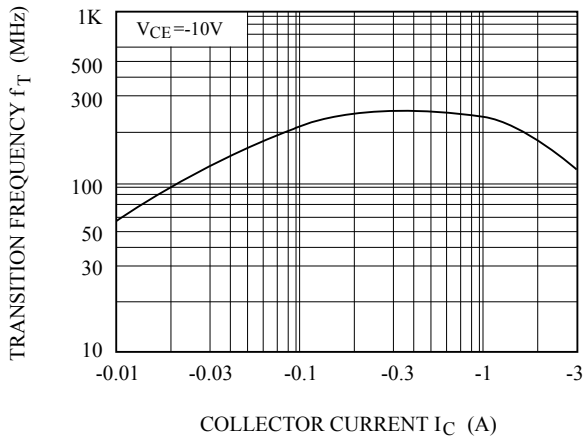

$C_{ob} - V_{CB}$

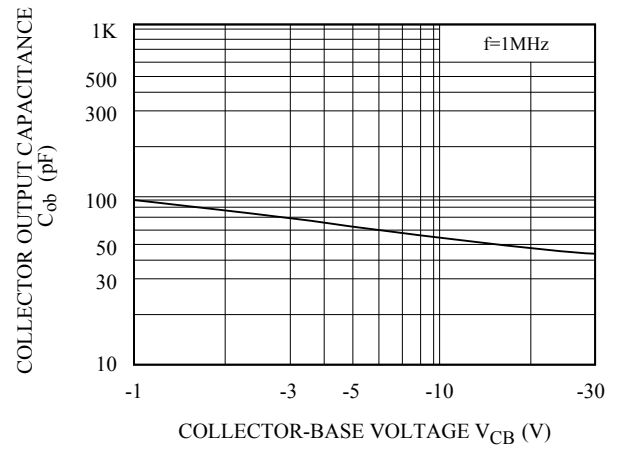

SAFE OPERATING AREA

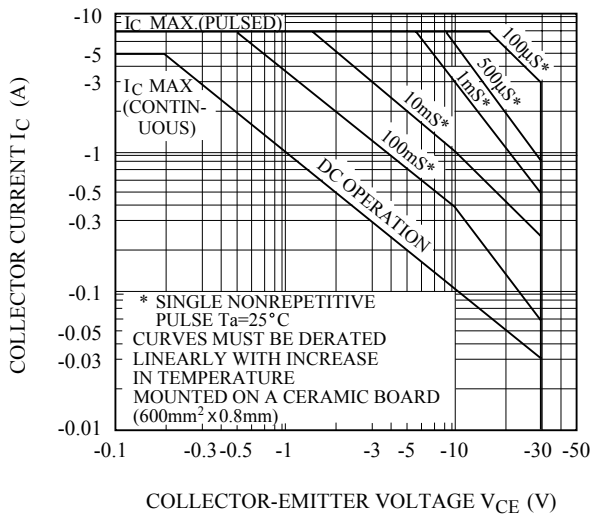

$P_c - T_a$

