


Industry's Highest Efficiency DC/DC Converter
48V or 24V Input, 1.2V, 1.5V, 1.8V, 2.0V, 2.5V, 3.3VDC, 60A Output or 1.2V,
1.5V, 1.8V, 2.0V, 2.5V, 3.3V, 5.0VDC, 40A Output or 5.0VDC, 30A Output

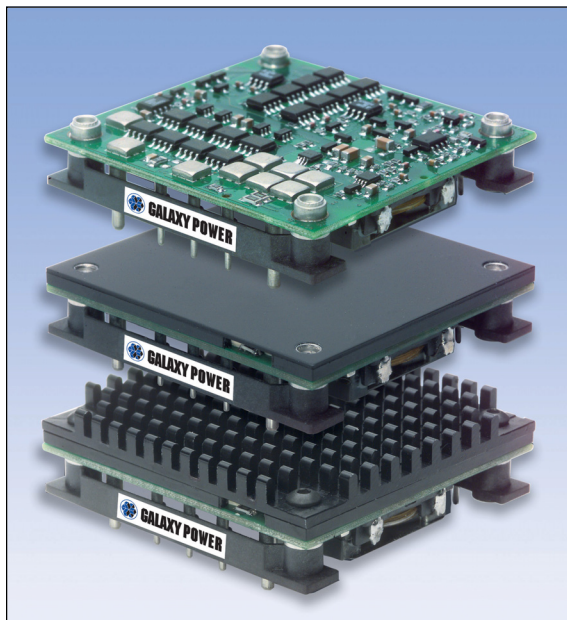

The open-frame Taurus HC is also available with a heat-spreading baseplate or complete with an optional heatsink.

*The High Current Taurus half brick is another **CoolConverter™** in the Galaxy family of high-efficiency DC/DC converters.*

- Industry Standard Pinout and Footprint
- Typical Efficiency:
93% at 3.3V, 30A; 92% at 3.3V, 60A
- No Heat Sink Required
- Very Low Common-mode Noise for a Commercial DC/DC Converter
- Two-stage Input Filter
- Constant Switching Frequency
- Remote Sense
- Single Board Design
- Optional Baseplate or Low Profile Heatsink for Improved Thermal Performance
- Header with M3 Metal Inserts for Mechanical Connection to PCB
- Two Year Warranty

CONTROL FUNCTIONS

- Uses Patented Power Supply Control and Architecture
- Microprocessor Controlled
- Primary-side Enable, Choice of Logic

PROTECTION FEATURES

- Over Temperature Protection
- Over Voltage Protection
- Over/Under Input Voltage Protection
- Over Current Protection

TYPICAL CHARACTERISTICS

- Output Setpoint Accuracy: $\pm 1\%$
- Load Regulation: $\pm 0.25\%$
- Line Regulation: $\pm 0.25\%$
- Regulation over Line, Load, and Temperature: $\pm 2\%$
- Output Trim



GENERAL SPECIFICATIONS

$V_{IN} = 48V_{DC}$, $T_A @ 25^{\circ}C$, 300 LFM airflow, $V_{OUT} = 3.3V$, $I_{OUT} = \text{Full Load}$ unless otherwise noted.

Available output power depends on ambient temperature and good thermal management. (See application graphs for limits.)

Input Characteristics				
Parameter	Min	Typ	Max	Units
Operating Input Voltage	36	48	75	V_{DC}
Input Current (Model Dependent)			8.0	A
Input Capacitance		6.6		μF
Input Hysteresis, Low Line		2		V_{DC}
Output Characteristics				
Regulation Over Line, Load & Temperature	98		102	$\%V_{NOM}$
Voltage Ripple			25	mV _{RMS}
Voltage Ripple, 20MHz BW			125	mV _{P-P}
Current Range	0		60	A
Current Limit Inception	62		72	A
Short Circuit Current, Peak (see Note below)			75	A
Output Transient Response, 50% to 75% load change, 1A/ μ sec			125	mV
Settling Time to $\pm 1\%$			300	μS
Turn-on Time to 98% V_{nom}			30	mS
Output Overshoot at Turn-on			1	$\%V_{OUT}$
Trim Range	90		110	$\%V_{OUT}$
Overvoltage Protection, Latching		130		$\%V_{OUT}$
Isolation				
Isolation Test Voltage, Input/Output (Basic)	2000			V_{DC}
Isolation Resistance	10			M Ω
Features				
Overtemperature Protection, Thermal Sensor, Latching*			117	$^{\circ}C$
Input, Output Ripple Frequency, Fixed**		200		kHz

Notes: During short circuit, converter will shut down and attempt to restart once per second.

The average current during this condition will be very low and the device can be safely left in this condition continuously. For specific output voltage specifications, see the corresponding detailed data sheet.

*PCB less than 130 $^{\circ}C$

**3V360 = 300kHz

General Specifications

Operating Temperature	-40 $^{\circ}C$ to +100 $^{\circ}C$
Storage Temperature	-55 $^{\circ}C$ to +125 $^{\circ}C$
Relative Humidity	10% to 95% RH, Non-condensing
Vibration	2 to 9Hz, 3mm disp. 9 to 200Hz 1g
Material Flammability	UL V-0
Weight	55 grams
MTBF	Telcordia (Bellcore) 1,300,000 hours

Approvals and Standards

UL and c-UL Recognized Component,
TUV, UL60950, CSA 22.2 No. 950,
IEC/EN60950**

EMC Characteristics:

Designed to meet emission and immunity
requirements per EN55022, CISPR22,
Class B and CISPR24.

** An external fuse shall be used to comply with the requirements.

CoolConverter™ Family

Galaxy's **COOLCONVERTER™** Family features:

- Patented single-stage power conversion architecture, control, and magnetic design allow unprecedented power density and efficiency in an isolated power supply.
- An advanced microcontroller reduces parts count while adding features, performance, and flexibility in the design.
- Low common-mode noise as a result of lower capacitance in the transformer compared to planar magnetics and metal baseplate designs.
- Higher reliability than planar transformer designs that can suffer from via fatigue from thermal cycling, and metal baseplate designs with board to board interconnects that are subject to mechanical stress on electrical connections.

PROTECTION AND CONTROL


Valid Input Voltage Range:

The converter measures the input voltage and will not allow operation outside of the input voltage specification. As shown by the graphs, hysteresis is added to both the high and low voltage to prevent the converter from turning on and off repeatedly when the voltage is held near either voltage extreme. At low line this assures the maximum input current is not exceeded; at high line this assures the semiconductor devices in the converter are not damaged by excessive voltage stress.


ON/OFF Logic Option:

The ON/OFF control logic can be either Negative (standard) or Positive to enable the converter. For Negative logic, the ON/OFF pin is brought below 1.0V with respect to the -INPUT pin to enable the converter. The pull-down must be able to sink 100 μ A. For Positive logic, the ON/OFF pin is brought to greater than 4.0V with respect to the -INPUT pin and be limited to less than 10V. To request the Positive logic version, add the suffix (P) to the standard part number. The ON/OFF pin has a built-in pull-up resistor of approximately 100k Ω to +5V.

Undervoltage Lockout

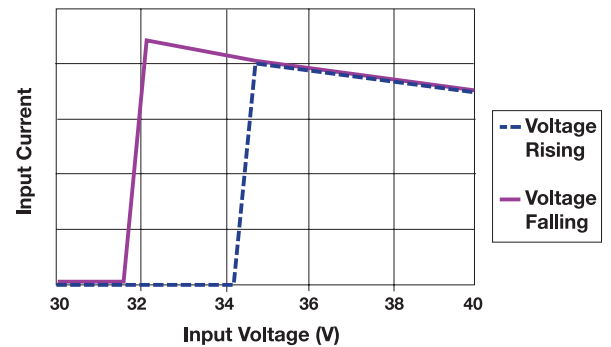

Overvoltage Lockout

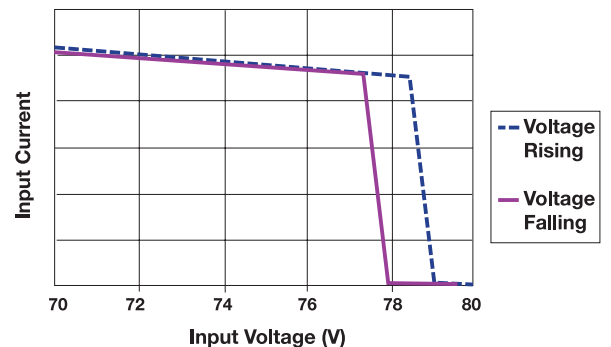

Output Over Voltage Protection:

The output voltage is constantly monitored by the microprocessor and a redundant secondary side crowbar circuit that is set to a higher trip point than the microprocessor protection. If the output voltage exceeds the over-voltage specification, the microprocessor will latch the converter off. To turn the converter on requires either cycling the ON/OFF pin or power to the converter. This advanced feature prevents the converter from damaging the load if there is a converter failure or application error. If non-latching is required, consult factory.

Thermal Shutdown:

The printed circuit board temperature is measured using a semiconductor sensor. If the maximum rated temperature is exceeded, the converter is latched off. To re-enable the converter requires cycling the ON/OFF pin or power to the converter. If non-latching shutdown is required, consult factory.

Control Options:

As the behavior of the circuit is determined by firmware in the microcontroller, specific customer requirements such as:

- non-latching thermal protection
- custom valid input voltage range
- controlled delay from initiating an ON/OFF signal for power sequencing

can be accomplished with no change to hardware.

The standard behavior was chosen based on system design experience but we understand that customers often have their own requirements.

Please consult Galaxy Power for your special needs.

Remote Sense:

The output voltage is regulated at the point where the sense pins connect to the power output pins. Total sense compensation should not exceed 0.4V or 10% of Vout, whichever is greater.


Safety:

An external input fuse must always be used to meet these safety requirements.

Trim:


To trim the output voltage higher, connect the required trim resistor from the Trim pin to the +Sense pin. To trim the output voltage lower, connect the required trim resistor from the Trim pin to the -Sense pin. See diagram below.

Trim-down

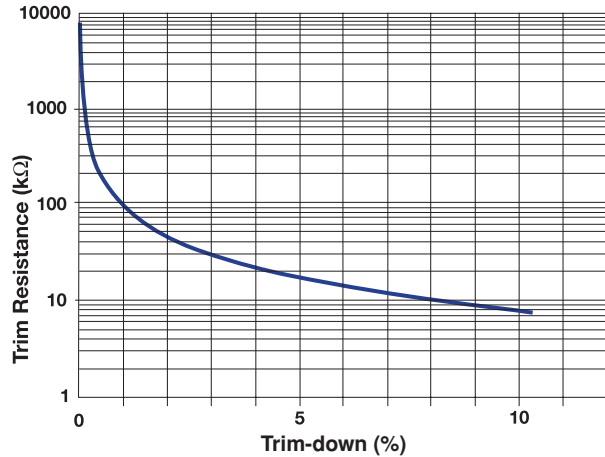


$$R_{\text{TRIM-DOWN}} = \left\{ \frac{100}{\Delta\%} - 2 \right\} \text{k}\Omega$$

Trim-up (for 3.3V)

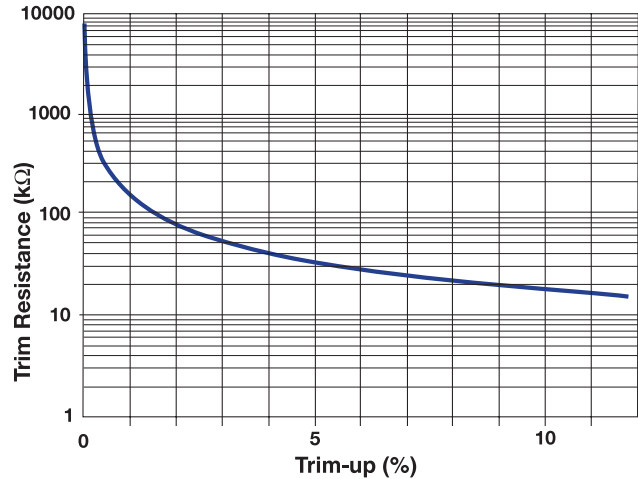


$$R_{\text{TRIM-UP}} = \left\{ \frac{V_O (100 + \Delta\%)}{1.225 \Delta\%} - \frac{(100 + 2\Delta\%)}{\Delta\%} \right\} \text{k}\Omega$$

External Output Trimming

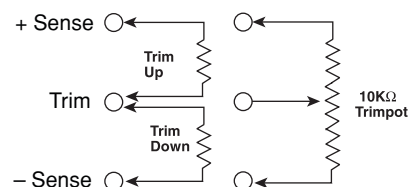


GHTW3V360 OPERATION


Efficiency

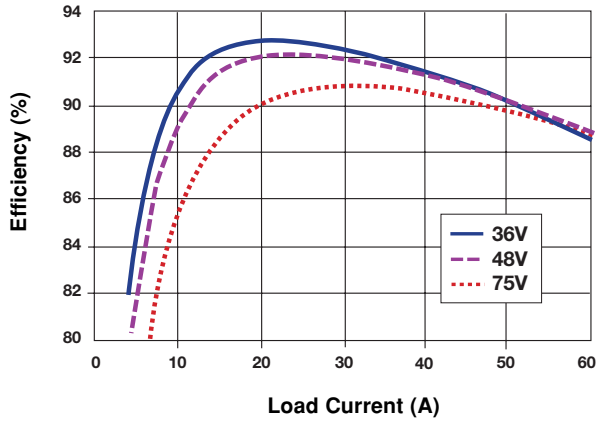


Power Dissipation

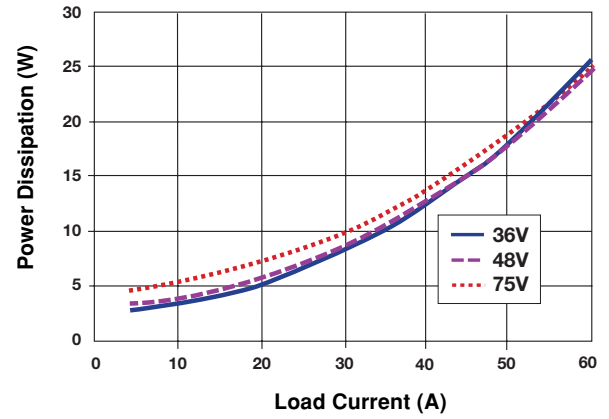


Transient Response

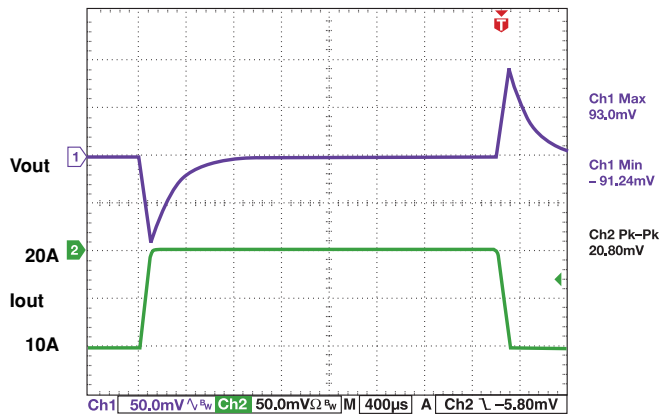


Voltage Ripple

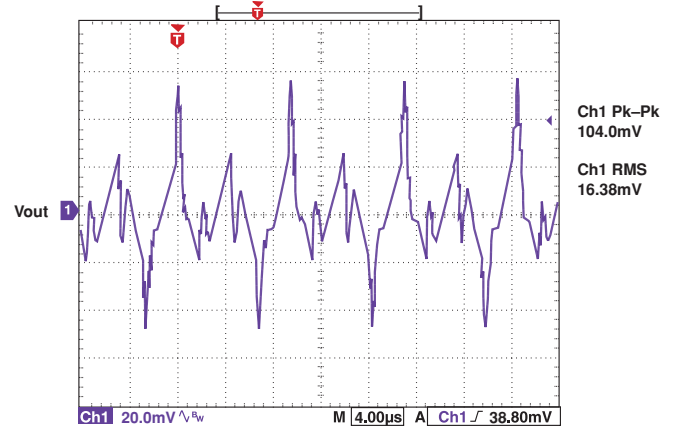


Start-up Waveform

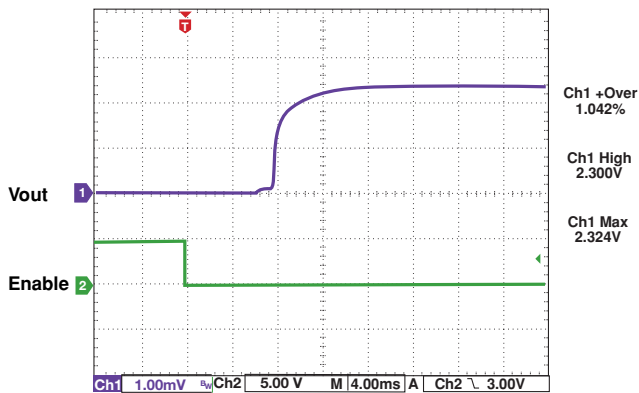

Thermal Derating Curves
GHTW3V360 Heatsink Ready

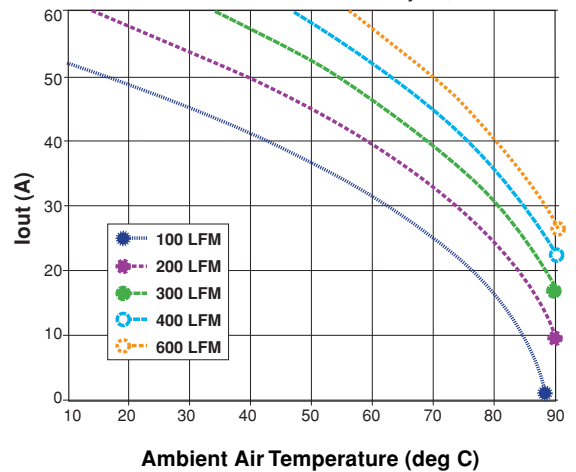

PACKAGE DETAIL

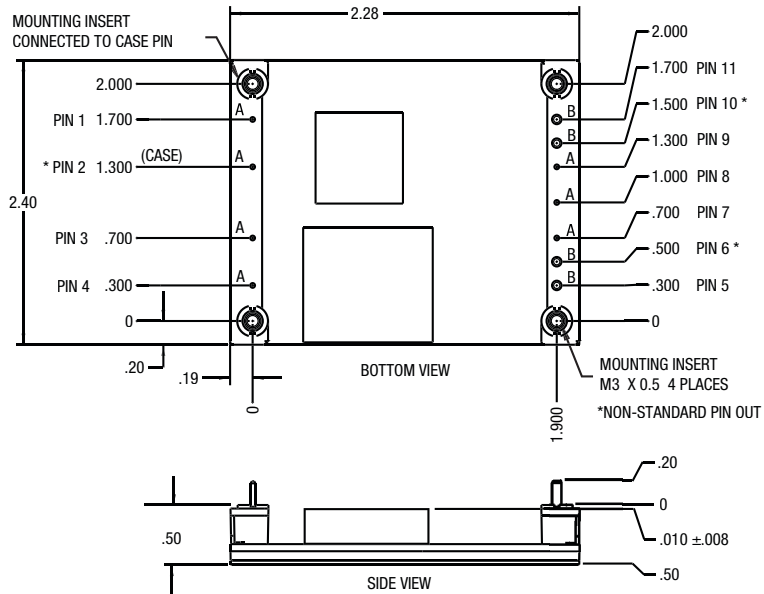

Pin Configuration —Bottom View

Pin No.	Function	Pin Dia. (in.)
1	– Input	0.040
2*	Case Pin	0.040
3	On/Off	0.040
4	+ Input	0.040
5	+ Output	0.080
6*	+ Output	0.080
7	+ Sense	0.040
8	Trim	0.040
9	– Sense	0.040
10*	– Output	0.080
11	– Output	0.080

Notes:

1. “A” = 0.040 dia. pins
2. “B” = 0.080 dia. pins
3. Optional pins marked*
4. Mechanical tolerances
x.xxx in. = ±0.005 in.
x.xx in. = ±0.01 in.
5. Pin material: brass with tin/lead plating over nickel
6. Workmanship:
Meets or exceeds IPC-A-610B Class II

ORDERING INFORMATION

Standard Model Number	Output Voltage	Max Current	Typical Efficiency	
			Half Load	Full Load
48V Input Models (Designated W)				
GHTW5V040*	5.0V	40A	93%	91%
GHTW3V360*	3.3V	60A	92%	89%
GHTW2V560*	2.5V	60A	90%	88%
GHTW2V060*	2.0V	60A	90%	85%
GHTW1V860*	1.8V	60A	89%	84%
GHTW1V560*	1.5V	60A	87%	83%
GHTW1V260*	1.2V	60A	86%	80%
GHTW5V030*	5.0V	30A	93%	90%
GHTW3V340*	3.3V	40A	93%	91%
GHTW2V540*	2.5V	40A	91%	88%
GHTW2V040*	2.0V	40A	90%	86%
GHTW1V840*	1.8V	40A	89%	84%
GHTW1V540*	1.5V	40A	88%	83%
GHTW1V240*	1.2V	40A	87%	82%

Standard Model Number	Output Voltage	Max Current	Typical Efficiency	
			Half Load	Full Load
24V Input Models (Designated C)				
GHTC5V040*	5.0V	40A	91%	88%
GHTC3V360*	3.3V	60A	91%	87%
GHTC2V560*	2.5V	60A	89%	85%
GHTC2V060*	2.0V	60A	89%	83%
GHTC1V860*	1.8V	60A	88%	82%
GHTC1V560*	1.5V	60A	86%	81%
GHTC1V260*	1.2V	60A	83%	78%
GHTC5V030*	5.0V	30A	91%	88%
GHTC3V340*	3.3V	40A	92%	90%
GHTC2V540*	2.5V	40A	90%	87%
GHTC2V040*	2.0V	40A	89%	85%
GHTC1V840*	1.8V	40A	88%	83%
GHTC1V540*	1.5V	40A	87%	82%
GHTC1V240*	1.2V	40A	86%	81%

Ordering Information

Example Part No.:

GHTW2V560MRGT

48V input
2.5V @ 60A output
Negative Logic
0.145" pin length
Case Ground Pin
Heatsink-ready Plate
Tuned Module

Options Code: (All options shown)

GHTW 3V3 60 P H S R G T 00X

Part Number _____
(from chart above)

Options:

Positive Logic Version _____

Extra Power Pins _____

Optional Pin Length _____
E = 0.18"
M = 0.145"
S = 0.12"

Heatsink-ready plate (requires G) _____

Case Ground Pin _____

Tuned Model _____

Heatsink (does not require R, must have G) _____
001 = 0.25"
002 = 0.50"
003 = 1.00"
004 = 0.13"

* Options:

P = Positive Logic Version; High = On

H = Extra Power Pins, Non-standard Pinout

E = 0.18" Pins (± 0.01 ")

M = 0.145" Pins (± 0.01 ")

S = 0.12" Pins (± 0.01 ")

RG = Heatsink Ready (incl. Plate + Case Ground Pin),
or with heatsink:

G00X = Case Ground Pin + Heatsink

T = Tuned model**

Heatsinks optional, consult factory.

Taurus/Taurus HC Heatsink Part Numbers

Part Number	Height	Typical Thermal Performance	
		Natural Convection Power Dissipation†	Forced Convection Thermal Resistance††
001	0.24"	5W	5.8°C/W
002	0.45"	7W	3.2°C/W
003	0.95"	11W	2.0°C/W
004	0.13"	TBD	TBD

**T (Tuned Model) Option

Designed for higher di/dt and ΔI applications, the transient response has been modified to take advantage of the capacitance on the customer's PCB. This unit requires a minimum load capacitance of 5600 μ F with an impedance magnitude of less than 0.005 Ω at 15kHz. It offers a minimum 3X improvement in the peak response compared to a standard unit.

Galaxy Power Inc. warrants to the original purchaser that the products conform to this data sheet and are free from material and workmanship defects for a period of two (2) years from the date of manufacture, if this product is used within specified conditions. Galaxy Power Inc. reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information. For additional details on this limited warranty consult the factory.



**GALAXY
POWER**
Incorporated

155 Flanders Road ♦ Westborough, MA 01581
508-870-9775 ♦ Fax: 508-870-9796
e-mail: info@galaxypwr.com
website: <http://www.galaxypwr.com>

© Copyright 2000 Galaxy Power. Specifications subject to change without notice.