



SAW Components

Data Sheet B7847

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe and some circuitry patterns, all in a dark, monochromatic color scheme.



SAW Components

B7847

Low-Loss Filter for Mobile Communication

1960,0 MHz




Data Sheet



Chip sized SAW package **QCS5E**

Features

- Low-loss RF filter for mobile telephone PCS systems, receive path
- Usable passband 60 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50Ω to 100Ω
- Low insertion loss and very high Tx blocking
- Package for **Surface Mounted Technology (SMT)**

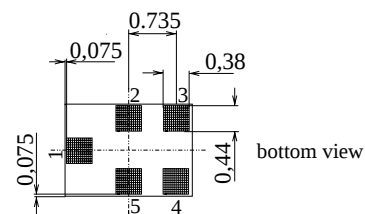


Terminals

- Gold-plated Ni

Dimensions in mm, approx. weight 0,007 g

Pin configuration

- 1 Input, unbalanced
- 3, 4 Output, balanced
- 2, 5 Case ground

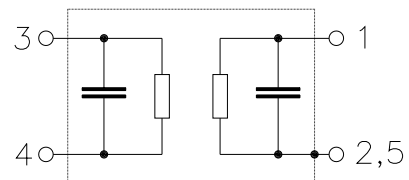

Type	Ordering code	Marking and Package according to	Packing according to
B7847	B39202-B7847-K410	C61157-A7-A131	F61074-V8151-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40/+ 85	°C	Machine Model, 10 pulses
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	50*	V	
Input power	P_S	10	dBm	

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B7847

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Characteristics

Operating temperature range: $T = 25\text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$
Terminating load impedance: $Z_L = 100\text{ }\Omega$ (balanced) || 22 nH

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	2,3	2,7	dB
1930,0 ... 1990,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,9	1,3	dB
1930,0 ... 1990,0 MHz					
Input VSWR		—	2,0	2,4	
1930,0 ... 1990,0 MHz					
Output VSWR		—	2,1	2,5	
1930,0 ... 1990,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-10	—	10	degree
1930,0 ... 1990,0 MHz					
Output amplitude balance ($ S_{31}/S_{21} $)		-1,4	—	1,4	dB
1930,0 ... 1990,0 MHz					
Attenuation	α				
10,0 ... 1600,0 MHz		40	50	—	dB
1600,0 ... 1850,0 MHz		30	35	—	dB
1850,0 ... 1910,0 MHz		24	27	—	dB
2040,0 ... 2200,0 MHz		25	29	—	dB
2200,0 ... 2800,0 MHz		30	39	—	dB
2800,0 ... 6000,0 MHz		40	47	—	dB



SAW Components

B7847

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -30 \dots 85 \text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50 \text{ } \Omega$
Terminating load impedance: $Z_L = 100 \text{ } \Omega$ (balanced) $\parallel 22 \text{ nH}$

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	2,3	2,9 ¹⁾	dB
1930,6 ... 1989,4 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,9	1,7	dB
1930,6 ... 1989,4 MHz					
Input VSWR		—	2,0	2,4	
1930,6 ... 1989,4 MHz					
Output VSWR		—	2,1	2,5	
1930,6 ... 1989,4 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-10	—	10	degree
1930,6 ... 1989,4 MHz					
Output amplitude balance ($ S_{31}/S_{21} $)		-1,4	—	1,4	dB
1930,6 ... 1989,4 MHz					
Attenuation	α				
10,0 ... 1600,0 MHz		40	50	—	dB
1600,0 ... 1850,6 MHz		30	35	—	dB
1850,6 ... 1909,4 MHz		24 ²⁾	27	—	dB
2040,0 ... 2200,0 MHz		25	29	—	dB
2200,0 ... 2800,0 MHz		30	39	—	dB
2800,0 ... 6000,0 MHz		40	47	—	dB

¹⁾ $T = +15^{\circ}\text{C}$ to $+65^{\circ}\text{C}$, 3,1 dB for $T = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

²⁾ $T = 0^{\circ}\text{C}$ to $+65^{\circ}\text{C}$, 20 dB for $T = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$



SAW Components

B7847

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Characteristics

Operating temperature range:	$T = -30 \dots 85 \text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50 \text{ } \Omega$
Terminating load impedance:	$Z_L = 100 \text{ } \Omega$ (balanced) $\parallel 22 \text{ nH}$

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	2,3	2,9 ¹⁾	dB
	1930,0 ... 1990,0 MHz	—	2,3	2,9 ¹⁾	dB
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,9	1,9	dB
	1930,0 ... 1990,0 MHz	—	0,9	1,9	dB
Input VSWR		—	2,0	2,4	
	1930,0 ... 1990,0 MHz	—	2,0	2,4	
Output VSWR		—	2,1	2,5	
	1930,0 ... 1990,0 MHz	—	2,1	2,5	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-10	—	10	degree
	1930,0 ... 1990,0 MHz	-10	—	10	degree
Output amplitude balance (S_{31} / S_{21})		-1,4	—	1,4	dB
	1930,0 ... 1990,0 MHz	-1,4	—	1,4	dB
Attenuation	α				
	10,0 ... 1600,0 MHz	40	50	—	dB
	1600,0 ... 1850,0 MHz	30	35	—	dB
	1850,0 ... 1910,0 MHz	23 ²⁾	27	—	dB
	2040,0 ... 2200,0 MHz	25	29	—	dB
	2200,0 ... 2800,0 MHz	30	39	—	dB
	2800,0 ... 6000,0 MHz	40	47	—	dB

¹⁾ $T = +15^{\circ}\text{C}$ to $+65^{\circ}\text{C}$, 3,3 dB for $T = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

²⁾ $T = 0^{\circ}\text{C}$ to $+65^{\circ}\text{C}$, 18 dB for $T = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$



SAW Components

B7847


Low-Loss Filter for Mobile Communication

1960,0 MHz


Data Sheet



Transfer function (measured at room temperature):

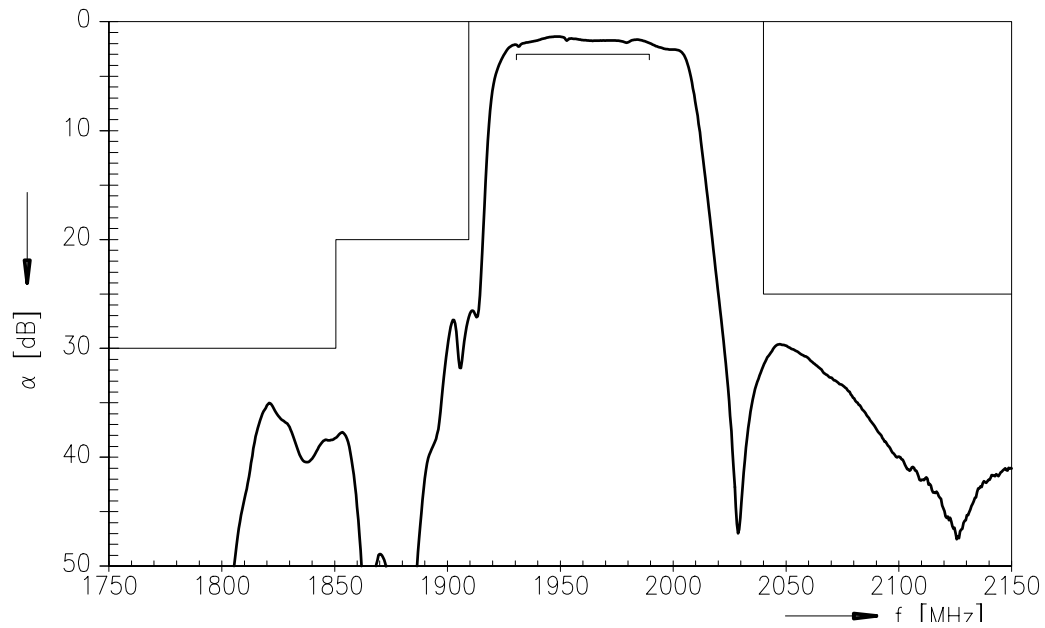

Transfer function (wideband, measured at room temperature):

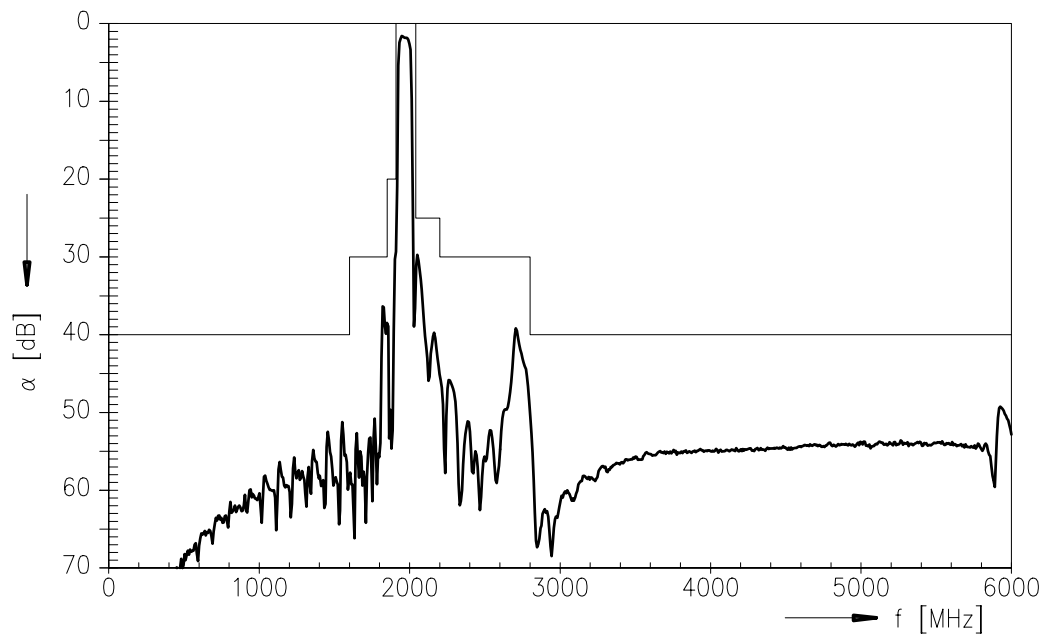



SAW Components	B7847
Low-Loss Filter for Mobile Communication	1960,0 MHz
Data Sheet	SMD

Published by EPCOS AG

SAW MC WT, P.O. Box 80 17 09, 81617 Munich, GERMANY

TEL +49 89 636 09, FAX +49 89 636 2 26 89

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.