




SAW Components

Data Sheet B7731, Pb-Free



Features

- Low-loss RF filter for mobile telephone cellular system, receive path
- Low amplitude ripple
- Usable passband 25 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50 Ω to 100 Ω
- Package for **Surface Mounted Technology (SMT)**
- Pb-Free

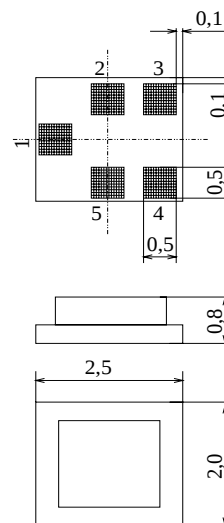 Chip Size SAW package **QCS5H**


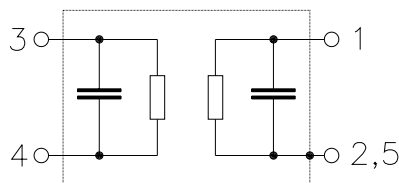
Dimensions in mm, approx. weight 0,015g

Terminals

- Ni, gold-plated

Pin configuration

- | | |
|-----|-------------------|
| 1 | Input, unbalanced |
| 3,4 | Balanced output |
| 2,5 | Case ground |



Type	Ordering code	Marking and Package according to	Packing according to
B7731	B39881-B7731-K910	C61157-A7-A139	F61074-V8189-Z000

Electrostatic Sensitive Device (ESD)
Maximum ratings

Operable temperature range	T	- 40 / + 85	$^{\circ}\text{C}$	Machine Model, 10 pulses source impedance 50 Ω , CDMA signal
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}^*	100*	V	
Input power max.	P_{IN}	0	dBm	

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B7731

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet




Characteristics


Operating temperature range: $T = -30$ to $+85$ °C
Terminating source impedance: $Z_S = 50 \Omega$
Terminating load impedance: $Z_L = 100 \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	881,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
869,0 ... 894,0 MHz		—	2,4	3,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
869,0 ... 894,0 MHz		—	1,0	1,6	dB
Input VSWR					
869,0 ... 894,0 MHz		—	1,9	2,0	
Output VSWR					
869,0 ... 894,0 MHz		—	2,0	2,1	
Attenuation	α				
0,0 ... 824,0 MHz		55,0	64,0	—	dB
824,0 ... 849,0 MHz		33,0	50,0	—	dB
915,0 ... 1000,0 MHz		25,0	31,0	—	dB
1000,0 ... 1610,0 MHz		55,0	63,0	—	dB
1610,0 ... 3000,0 MHz		50,0	64,0	—	dB
3000,0 ... 6000,0 MHz		45,0	68,0	—	dB
Amplitude Imbalance		-0,8	—	0,8	dB
Phase Imbalance		-4,5	—	3,5	degree

Transfer function

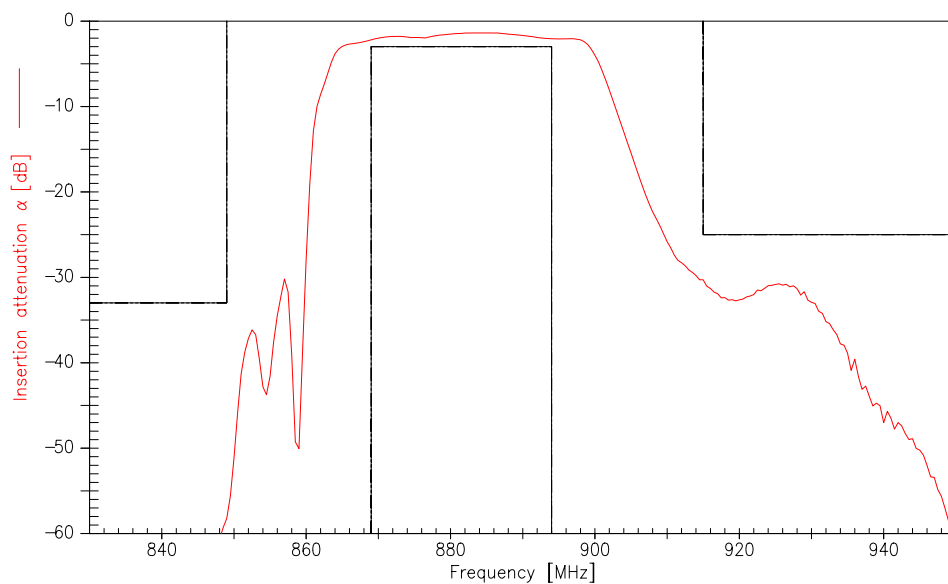

Transfer function (wideband)

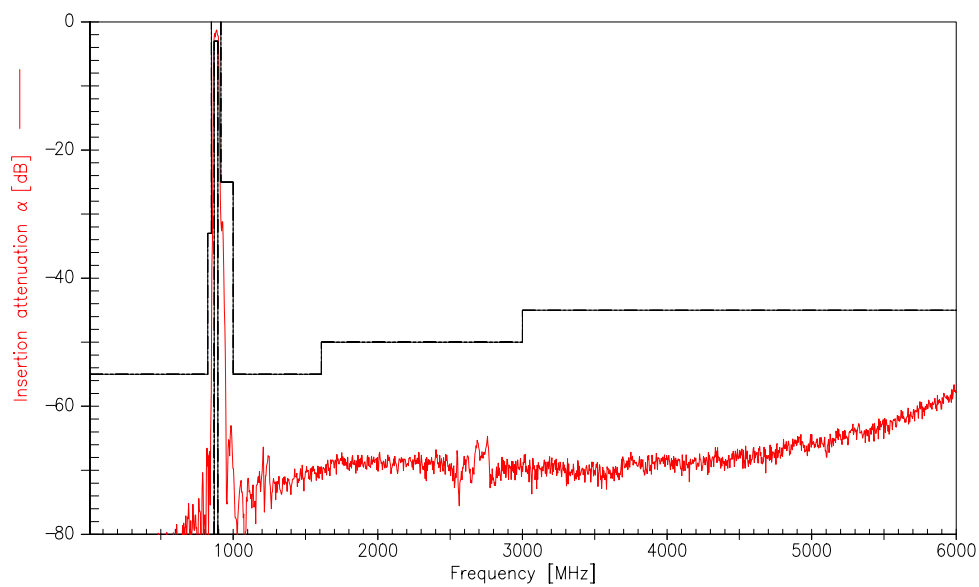



SAW Components

B7731



Low-Loss Filter for Mobile Communication

881,5 MHz



Data Sheet



S_{11}

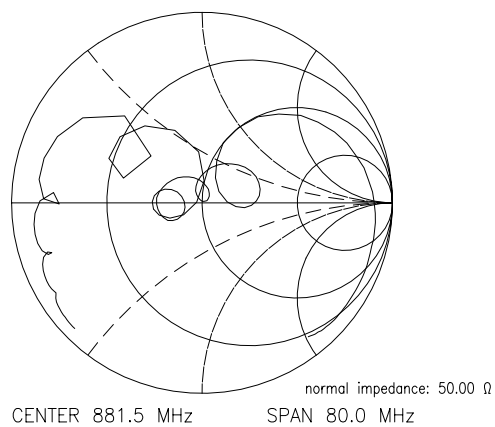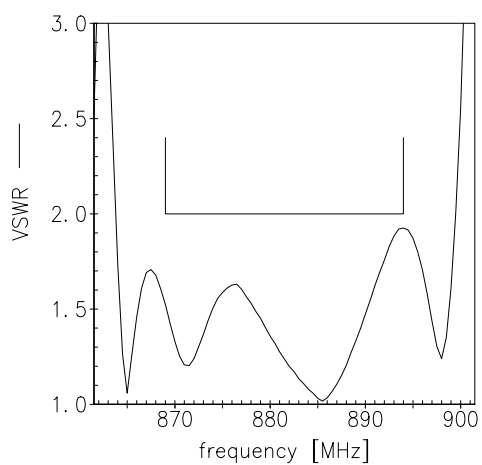

S_{22}

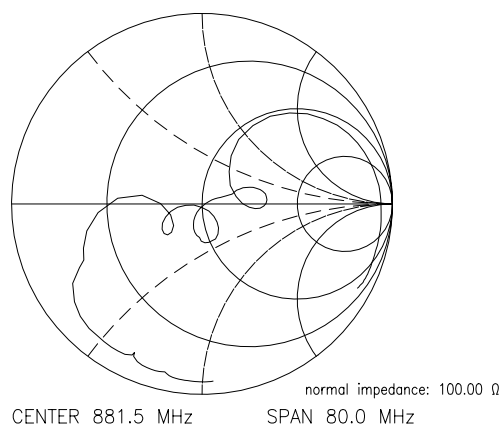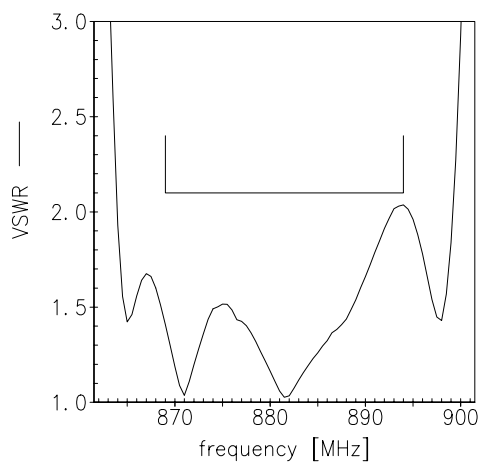



SAW Components

B7731

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC PD

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.