



SAW Components

Data Sheet B4234

Data Sheet

An abstract, grayscale graphic featuring a globe with a grid pattern, overlaid with a large, stylized, and slightly blurred "EPCOS" logo. The logo is rendered in a light gray, almost white, color, giving it a three-dimensional appearance as if it's floating or attached to the globe. The background is dark and textured, with some light streaks and a sense of motion or depth.

EPCOS



SAW Components

B4234

Low-Loss Dual Band Filter for Mobile Communication

881,5/1960,0 MHz

Data Sheet



Ceramic package **QCC10G**

Features


- Low-loss RF filter for mobile telephone GSM 850/1900 system , receive path
- Usable passband:
Filter 1 (GSM850): 25 MHz
Filter 2 (GSM1900): 60 MHz
- Unbalanced to balanced operation of both filters
- Impedance transformation from 50 Ω to 150 Ω for both filters
- Suitable for GPRS class 1 to 12
- Ceramic package for **Surface Mounted Technology (SMT)**
- RoHS compliant

Terminals


- Ni, gold-plated

Pin configuration

1, 2	Output, balanced [Filter 1]
3, 4	Output, balanced [Filter 2]
6	Input [Filter 2]
7,8	Case ground
9	Input [Filter 1]
5, 10	Case ground

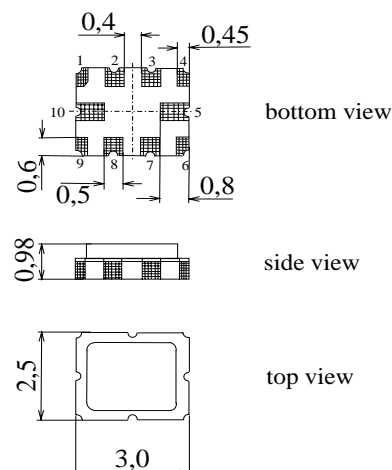

Dimensions in mm, approx. weight **27 mg**



Type	Ordering code	Marking and Package according to	Packing according to
B4234	B39202-B4234-H910	C61157-A7-A142	F61074-V8174-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 / + 85	$^{\circ}\text{C}$	Machine Model, 10 pulses
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD} *	50*	V	
Input power at Tx bands:				peak power of GSM signal, duty cycle 4:8
GSM850, GSM900	P_{IN}	15	dBm	
GSM1800, GSM1900				

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B4234

Low-Loss Dual Band Filter for Mobile Communication

881,5/1960,0 MHz

Data Sheet



Characteristics Filter 1 (GSM850)

Operating temperature range:

$T = -20$ to $+75^{\circ}\text{C}$



Terminating source impedance:

$Z_S = 50\ \Omega$ (unbalanced)

Terminating load impedance:

$Z_L = 150\ \Omega$ (balanced) || 56 nH

		min.	typ.	max.	
Center frequency	f_c	—	881,5	—	MHz
Maximum insertion attenuation	α_{\max}				
869,0 ... 894,0 MHz		—	1,8	2,2	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
869,0 ... 894,0 MHz		—	0,6	1,0	dB
Input VSWR					
869,0 ... 894,0 MHz		—	1,8	2,1	
Output VSWR					
869,0 ... 894,0 MHz		—	1,8	2,1	
Output amplitude balance (S_{31}/S_{21})					
869,0 ... 894,0 MHz		-1,5		1,0	dB
Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^{\circ}$)					
869,0 ... 894,0 MHz		-10,0		12,0	degree
Absolute attenuation	α_{abs}				
10,0 ... 480,0 MHz		45,0	50,0	—	dB
480,0 ... 849,0 MHz		30,0	34,0	—	dB
915,0 ... 1000,0 MHz		23,0	27,0	—	dB
1000,0 ... 3500,0 MHz		30,0	34,0	—	dB
3500,0 ... 4500,0 MHz		22,0	26,0	—	dB
4500,0 ... 6000,0 MHz		14,0	17,0	—	dB

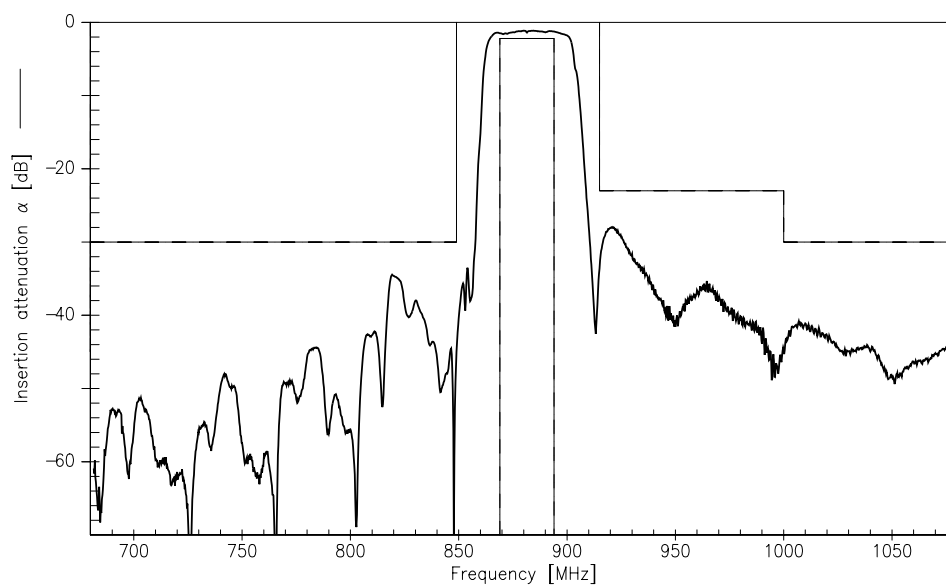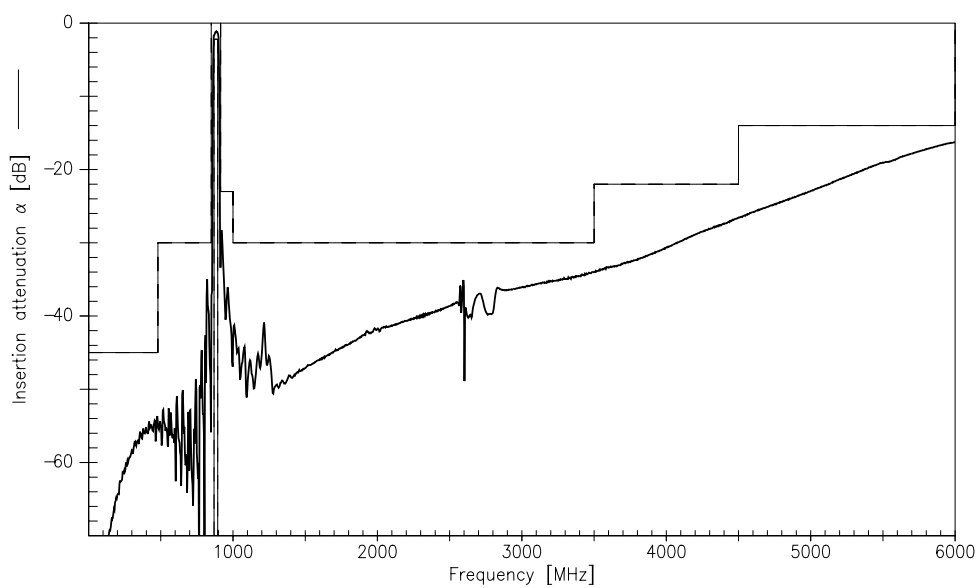**Transfer function of filter 1 (narrow band)****Transfer function of filter 1 (wide band)**



SAW Components

B4234

Low-Loss Dual Band Filter for Mobile Communication

881,5/1960,0 MHz

Data Sheet



Characteristics Filter 2 (GSM1900)

Operating temperature range:

$$T = +25 \pm 2 \text{ }^{\circ}\text{C}$$

Terminating source impedance:

$$Z_S = 50 \text{ } \Omega \text{ (unbalanced)}$$

Terminating load impedance:

$$Z_L = 150 \text{ } \Omega \text{ (balanced)} \parallel 12 \text{ nH}$$

			min.	typ.	max.	
Center frequency	f_c		—	1960,0	—	MHz
Maximum insertion attenuation	α_{\max}					
1930,0 ... 1990,0	MHz		—	2,2	2,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
1930,0 ... 1990,0	MHz		—	0,6	1,0	dB
Input VSWR						
1930,0 ... 1990,0	MHz		—	1,7	2,0	
Output VSWR						
1930,0 ... 1990,0	MHz		—	1,7	2,0	
Output amplitude balance (S_{31} / S_{21})						
1930,0 ... 1990,0	MHz		-1,3		1,3	dB
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)						
1930,0 ... 1990,0	MHz		-12,0		8,0	degree
Absolute attenuation	α_{abs}					
10,0 ... 1510,0	MHz		40,0	43,0	—	dB
1510,0 ... 1820,0	MHz		30,0	34,0	—	dB
1820,0 ... 1880,0	MHz		26,0	30,0	—	dB
1880,0 ... 1910,0	MHz		12,0	16,0	—	dB
2020,0 ... 2080,0	MHz		12,0	17,0	—	dB
2080,0 ... 2400,0	MHz		24,0	29,0	—	dB
2400,0 ... 4500,0	MHz		30,0	32,0	—	dB
4500,0 ... 6000,0	MHz		22,0	25,0	—	dB



SAW Components

B4234

Low-Loss Dual Band Filter for Mobile Communication

881,5/1960,0 MHz

Data Sheet



Characteristics Filter 2 (GSM1900)

Operating temperature range:

$T = -20$ to $+75^{\circ}\text{C}$

Terminating source impedance:

$Z_S = 50\ \Omega$ (unbalanced)

Terminating load impedance:

$Z_L = 150\ \Omega$ (balanced) \parallel 12 nH

			min.	typ.	max.	
Center frequency	f_c		—	1960,0	—	MHz
Maximum insertion attenuation	α_{\max}					
1930,0 ... 1990,0 MHz			—	2,3	2,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
1930,0 ... 1990,0 MHz			—	0,6	1,0	dB
Input VSWR						
1930,0 ... 1990,0 MHz			—	1,9	2,2	
Output VSWR						
1930,0 ... 1990,0 MHz			—	1,9	2,2	
Output amplitude balance (S_{31} / S_{21})						
1930,0 ... 1990,0 MHz			-1,3		1,3	dB
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)						
1930,0 ... 1990,0 MHz			-12,0		8,0	degree
Absolute attenuation	α_{abs}					
10,0 ... 1510,0 MHz			40,0	43,0	—	dB
1510,0 ... 1820,0 MHz			30,0	34,0	—	dB
1820,0 ... 1880,0 MHz			26,0	30,0	—	dB
1880,0 ... 1910,0 MHz			10,0	13,0	—	dB
2020,0 ... 2080,0 MHz			12,0	17,0	—	dB
2080,0 ... 2400,0 MHz			24,0	29,0	—	dB
2400,0 ... 4500,0 MHz			30,0	32,0	—	dB
4500,0 ... 6000,0 MHz			22,0	25,0	—	dB



SAW Components

B4234


Low-Loss Dual Band Filter for Mobile Communication

881,5/1960,0 MHz


Data Sheet



Transfer function of filter 2 (narrow band)

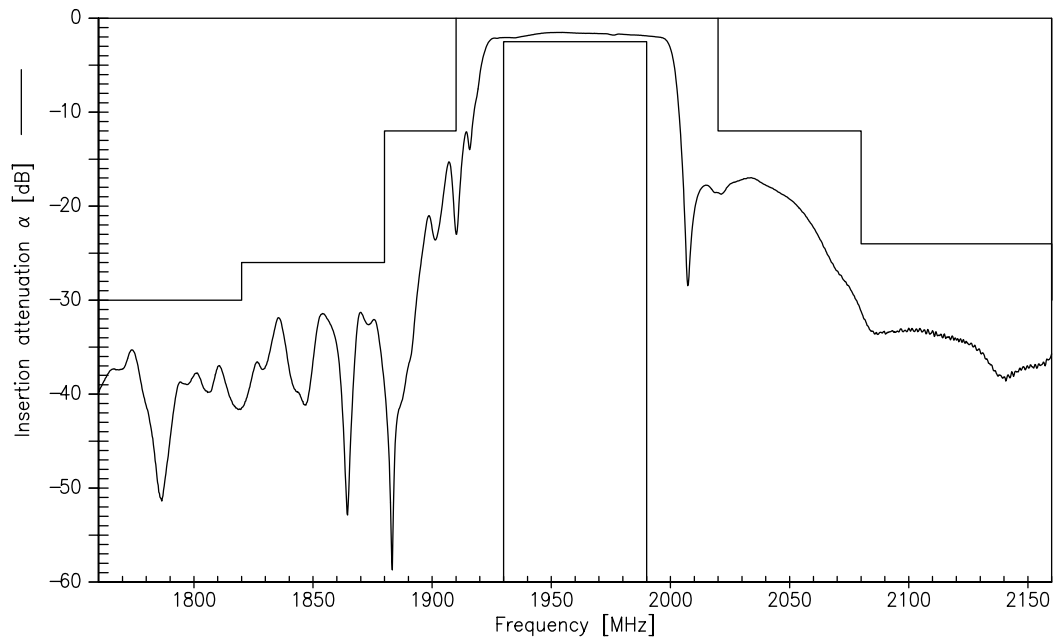

Transfer function of filter 2 (wide band)

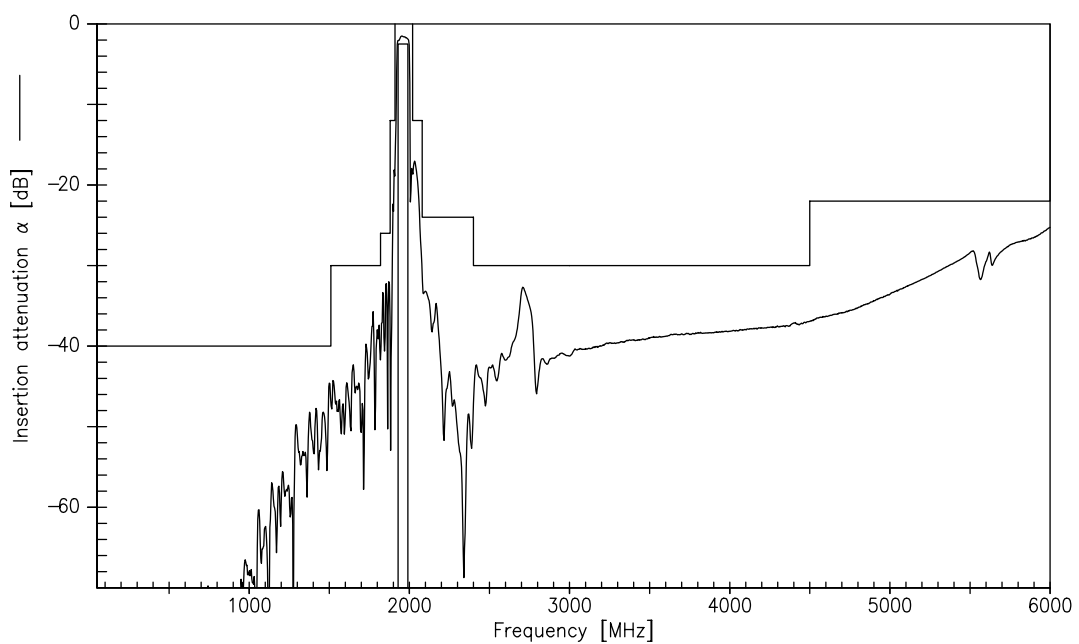



SAW Components		B4234
Low-Loss Dual Band Filter for Mobile Communication		881,5/1960,0 MHz
Data Sheet		

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW COM WT PD

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.