

Technical Data Sheet (Preliminary)

Full Color Side View LEDs (Height 0.8mm)

99-135/RSGHB7C-C06/2D

Features

- White package.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Inter reflector.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (12mm Tape)
- Pb-free
- The product itself will remain within RoHS compliant version.



Descriptions

- The 99-135 series is available in soft red, green and blue.
Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications






- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.

Device Selection Guide


Chip			Lens Color
Type	Material	Emitted Color	
RS	AlGaInP	Brilliant Red	Water Clear
GH	InGaN	Brilliant Green	
B7	InGaN	Blue	

99-135/RSGHB7C-C06/2D

Package Outline Dimensions

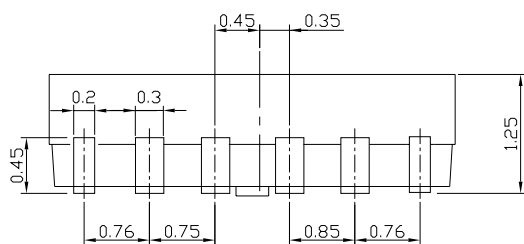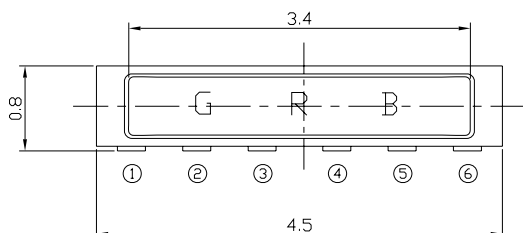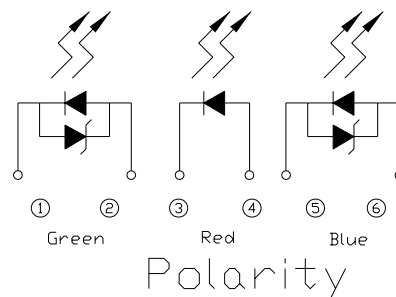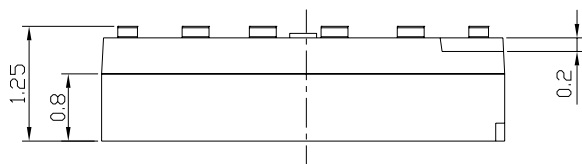

Recommended soldering pad design

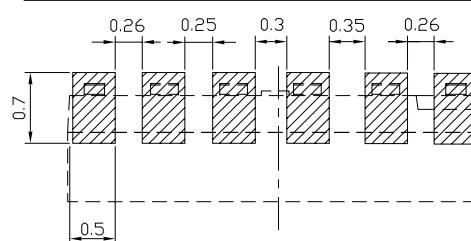

Note: The tolerances unless mentioned is $\pm 0.1\text{mm}$;Unit = mm

99-135/RSGHB7C-C06/2D
Absolute Maximum Ratings (Ta=25°C)







Parameter	Symbol		Rating	Unit
Reverse Voltage	V_R		5	V
Forward Current	I_F	RS	50	mA
		GH	30	
		B7	30	
Peak Forward Current(Duty 1/10@ 1KHZ)	I_{FP}	RS	100	mA
		GH	100	
		B7	100	
Power Dissipation	P_d	RS	130	mW
		GH	110	
		B7	110	
Electrostatic Discharge(HBM)	ESD	RS	2000	V
		GH	2000	
		B7	2000	
Operating Temperature	T_{opr}		-40 ~ +85	°C
Storage Temperature	T_{stg}		-40~ +90	°C
Soldering Temperature	T_{sol}		Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.	

99-135/RSGHB7C-C06/2D
Electro-Optical Characteristics (Ta=25°C)







Parameter	Symbol		Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _v	RS	50	80	-----	mcd	I _F =5mA
		GH	200	300	-----		
		B7	20	40	-----		
Viewing Angle	2θ 1/2		-----	120	-----	deg	I _F =5mA
Peak Wavelength	λ _p	RS	-----	632	-----	nm	I _F =5mA
		GH	-----	518	-----		
		B7	-----	468	-----		
Dominant Wavelength	λ _d	RS	-----	625	-----	nm	I _F =5mA
		GH	-----	530	-----		
		B7	-----	460	-----		
Spectrum Radiation Bandwidth	△λ	RS	-----	20	-----	nm	I _F =5mA
		GH	-----	36	-----		
		B7	-----	26	-----		
Forward Voltage	V _F	RS	-----	1.8	2.4	V	I _F =5mA
		GH	-----	3.0	3.7		
		B7	-----	3.0	3.7		
Reverse Current	I _R	RS	-----	-----	10	μA	V _R =5V

99-135/RSGHB7C-C06/2D

Typical Electro-Optical Characteristics Curves(RS)

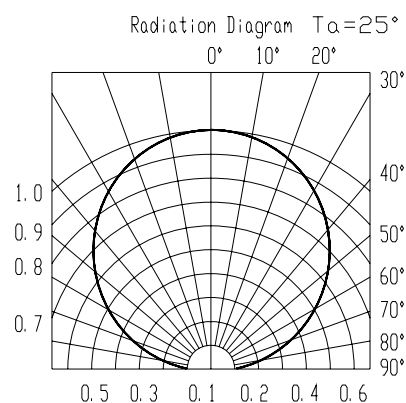
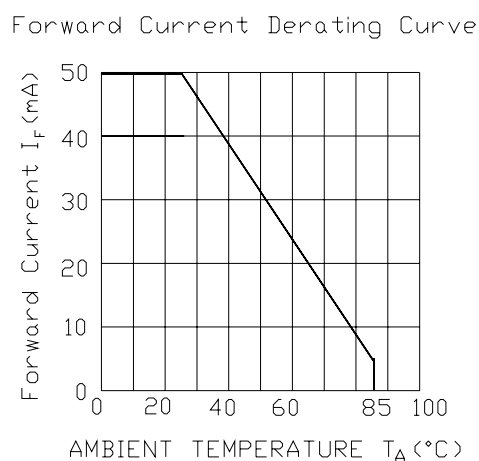
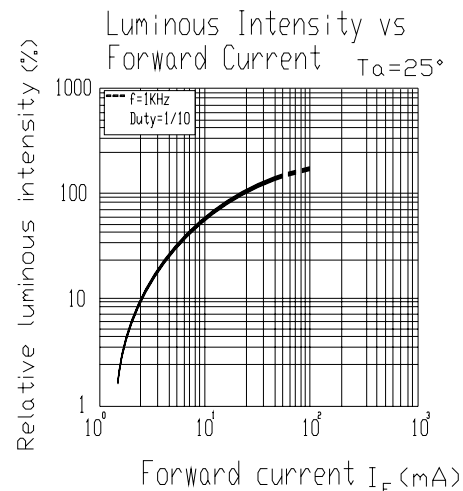
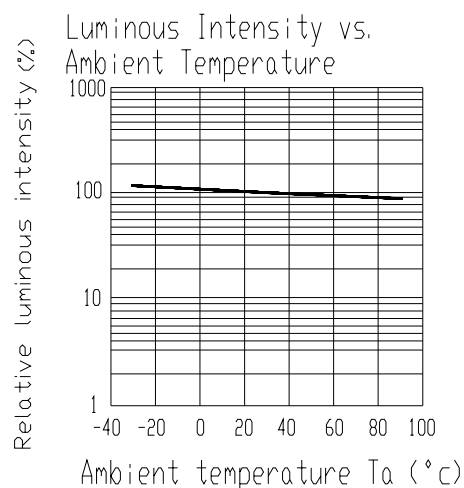
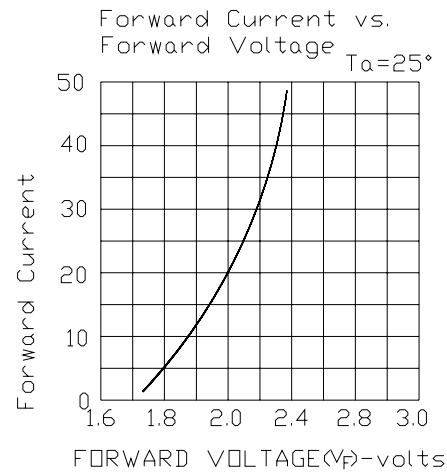
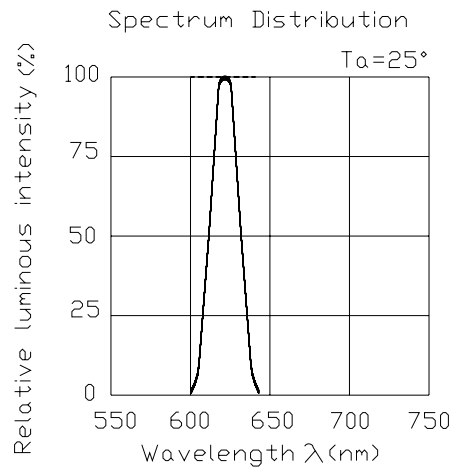


Typical Electro-Optical Characteristics Curves(GH)

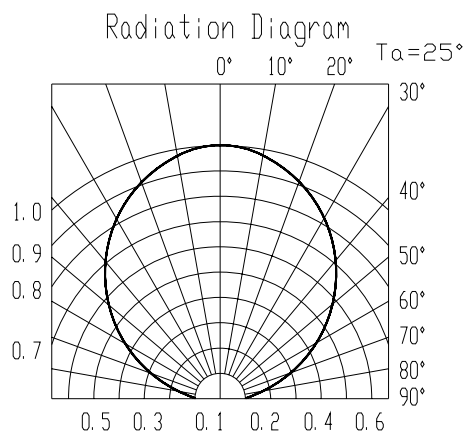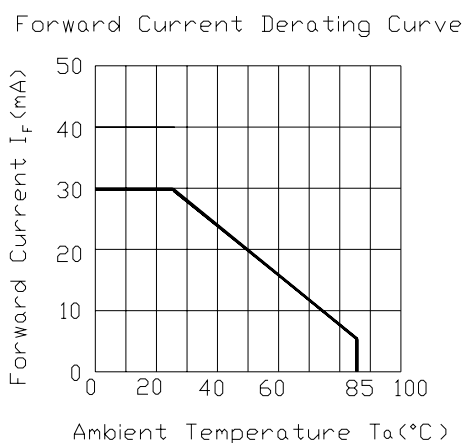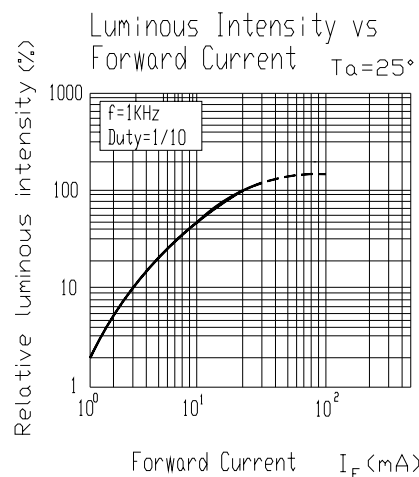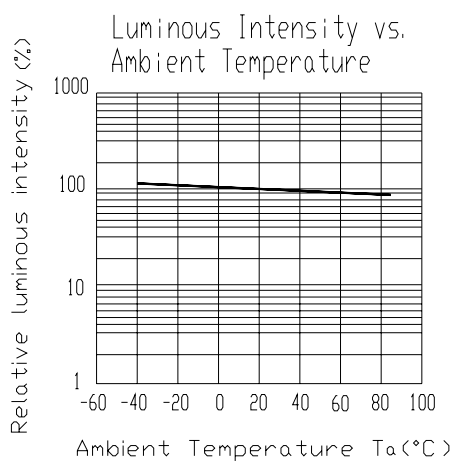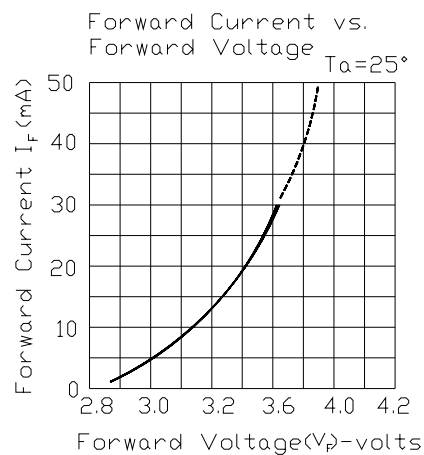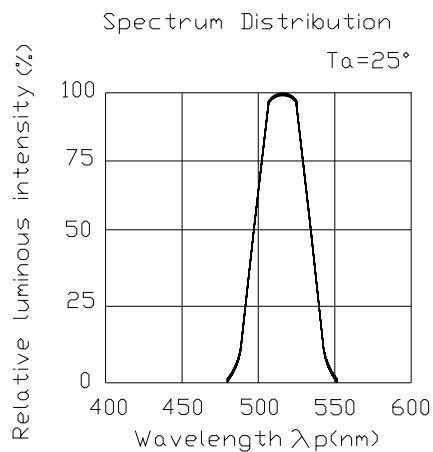

99-135/RSGHB7C-C06/2D

Typical Electro-Optical Characteristics Curves(B7)

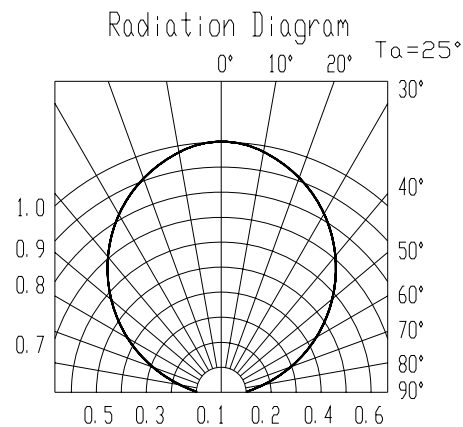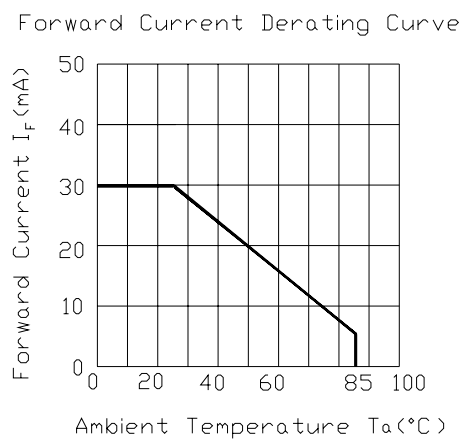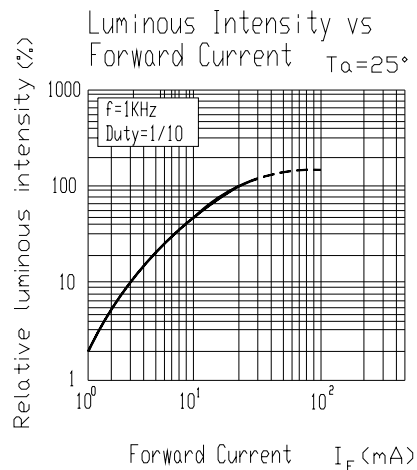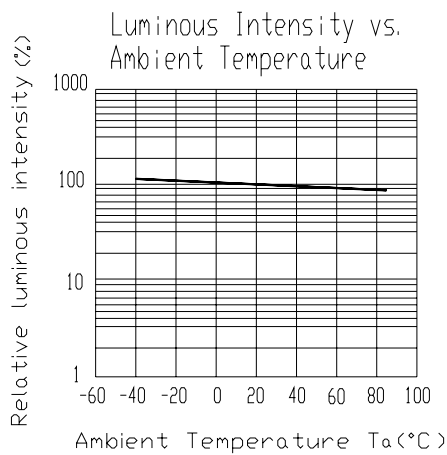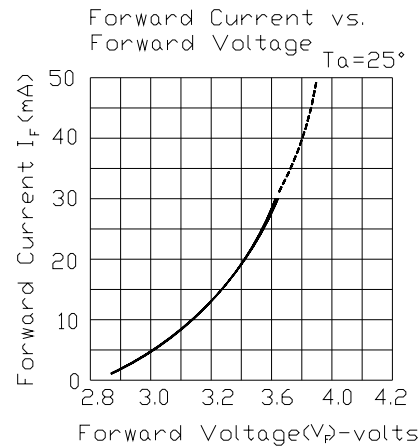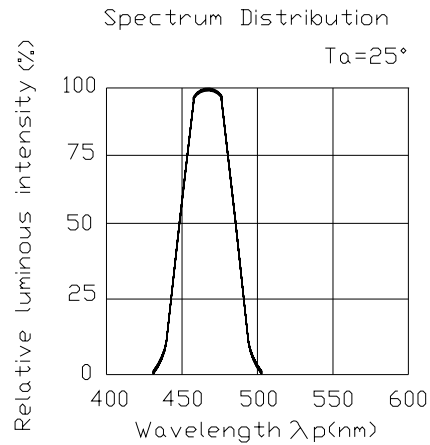





99-135/RSGHB7C-C06/2D

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank


EVERLIGHT		
CPN: XXXXXX	P/N: XXXXXX	RoHS
		
XXXXXXXXXXXXXXXXXXXX		CAT: HUE: REF:
QTY: XXXX		
LOT NO: XXXXXXXXXXXX		
		
MADE IN TAIWAN		

Reel Dimensions

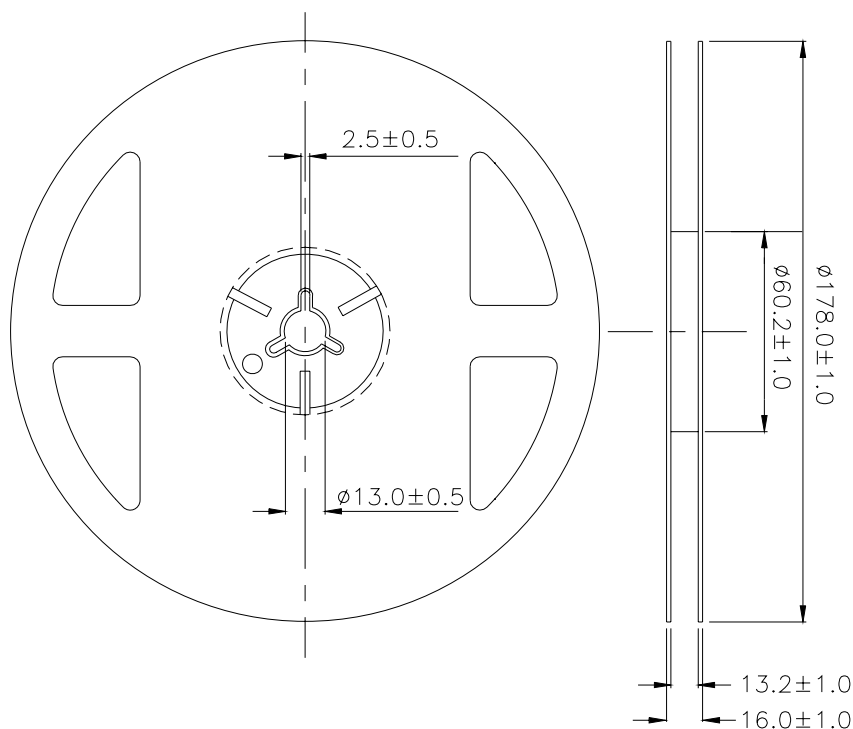


Note: Tolerances Unless Dimension ± 0.1 mm ,Unit = mm

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

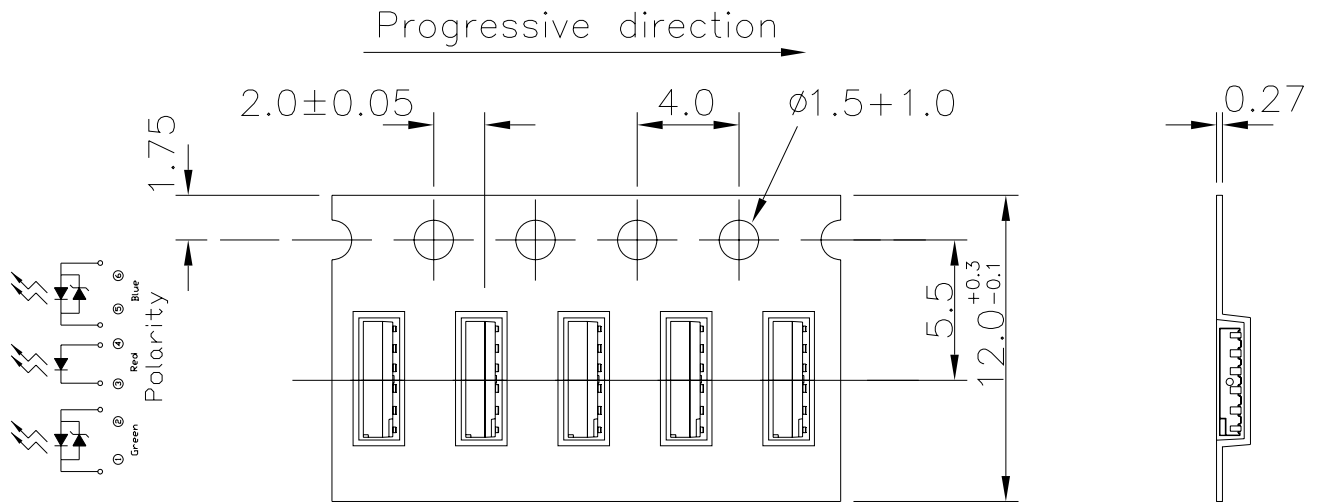

Note: 1.Tolerances Unless Dimension $\pm 0.1\text{mm}$ Unit = mm

Moisture Resistant Packaging

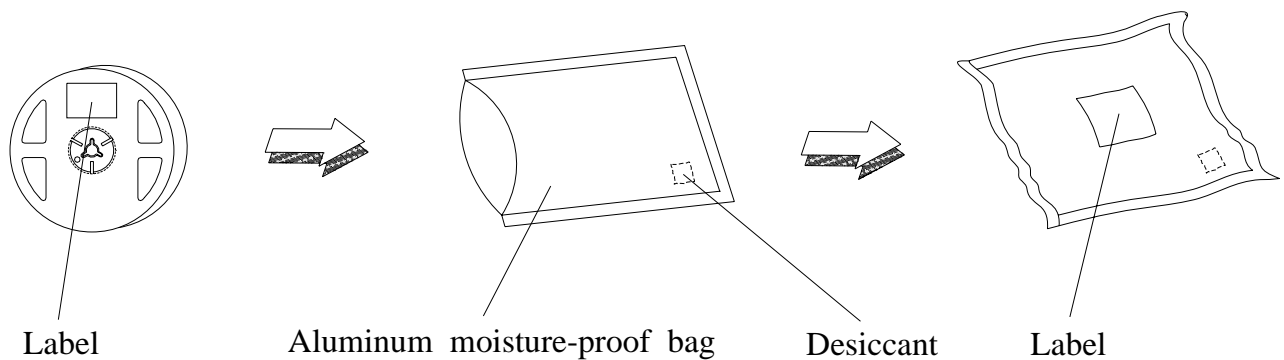

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 10sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	I _F = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/RH85%	1000 Hrs.	22 PCS.	0/1

Precautions For Use**1. Over-current-proof**

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.


2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.

2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less.

If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

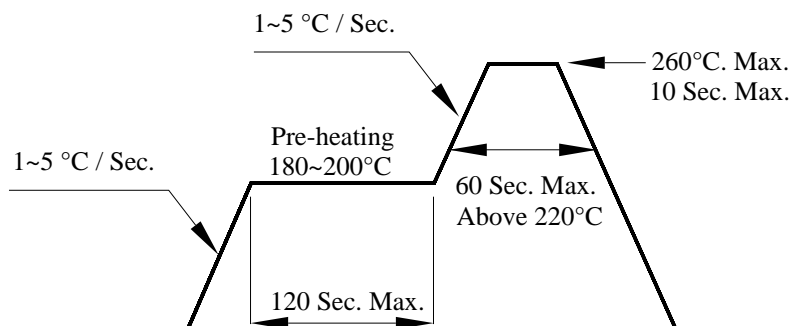3. Soldering Condition**3.1 Pb-free solder temperature profile**

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

99-135/RSGHB7C-C06/2D**5.Repairing**

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

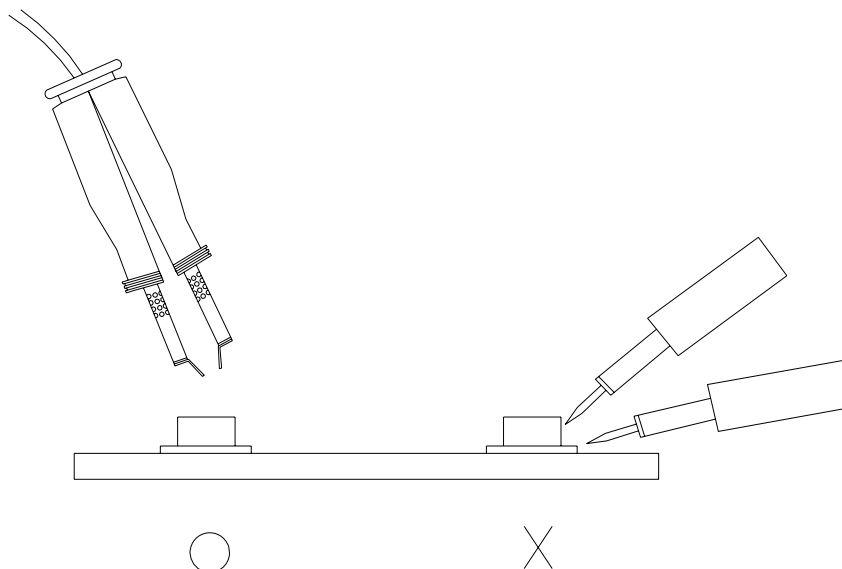**EVERLIGHT ELECTRONICS CO., LTD.**

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>