

HOA1881

Transmissive Sensor

FEATURES

- Choice of phototransistor or photodarlington output
- 0.060 in.(1.52 mm)dia. detector aperture
- 0.125 in.(3.18 mm) slot width
- 18.0 in.(457 mm) min. 22 AWG UL 1429 wire leads


DESCRIPTION

The HOA1881 series consists of an infrared emitting diode facing an NPN silicon phototransistor (HOA1881-011, -012) or photodarlington (HOA1881-013) encased in a black thermoplastic housing. Detector switching takes place whenever an opaque object passes through the slot between emitter and detector. The lead wires of minimum length 18.0 in.(457 mm) provide alternate electrical connection when PC board mounting is not possible. The HOA1881 series employs plastic molded components. For additional component information see SEP8506, SDP8406, and SDP8106.

Housing material is nylon. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

Wire color code and functions are:


- Black - IRED Anode
- Orange - Detector Collector
- Brown - IRED Cathode
- Red - Detector Emitter

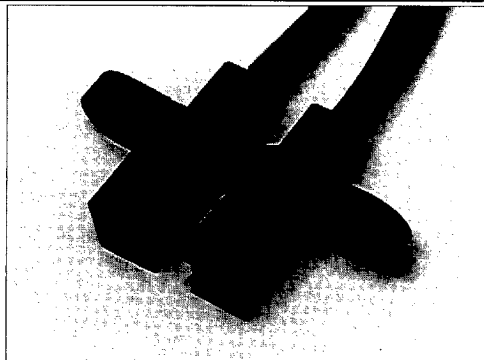

INFRA-9.TIF

OUTLINE DIMENSIONS in inches (mm)

Tolerance 3 plc decimals $\pm 0.010(0.25)$
2 plc decimals $\pm 0.020(0.51)$

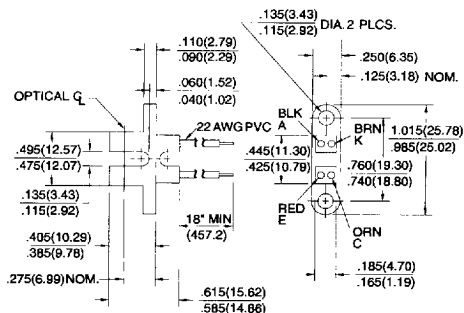

DIM_052.cdr

HOA1881

Transmissive Sensor

ELECTRICAL CHARACTERISTIC (25°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
IR EMITTER						
Forward Voltage	V_F			1.6	V	$I_F=20\text{ mA}$
Reverse Leakage Current	I_R			10	μA	$V_R=3\text{ V}$
DETECTOR						
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$				V	$I_C=100\text{ }\mu\text{A}$
HOA1881-011, -012		30				
HOA1881-013		15				
Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	5.0			V	$I_E=100\text{ }\mu\text{A}$
Collector Dark Current	I_{CEO}			100	nA	$V_{CE}=10\text{ V}$
HOA1881-011, -012				250		$I_F=0$
HOA1881-013						
COUPLED CHARACTERISTICS						
On-State Collector Current	$I_{C(ON)}$				mA	$V_{CE}=5\text{ V}$
HOA1881-011		0.3				$I_F=20\text{ mA}$
HOA1881-012		1.8				
HOA1881-013		4.0				
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$			0.4	V	$I_F=20\text{ mA}$
HOA1881-011				0.4		$I_C=40\text{ }\mu\text{A}$
HOA1881-012				1.1		$I_C=230\text{ }\mu\text{A}$
HOA1881-013						$I_C=500\text{ }\mu\text{A}$
Rise And Fall Time	t_r, t_f				μs	$V_{CC}=5\text{ V}, I_C=1\text{ mA}$
HOA1881-011, -012			15			$R_L=1000\text{ }\Omega$
HOA1881-013			75			$R_L=100\text{ }\Omega$

ABSOLUTE MAXIMUM RATINGS

(25°C Free-Air Temperature unless otherwise noted)

Operating Temperature Range -40°C to 85°C

Storage Temperature Range -40°C to 85°C

Soldering Temperature (5 sec) 240°C

IR EMITTER

Power Dissipation 100 mW ⁽¹⁾

Reverse Voltage 3 V

Continuous Forward Current 50 mA

DETECTOR

Collector-Emitter Voltage TRANS. DARLINGTON

30 V 15 V

Emitter-Collector Voltage 5 V 5 V

Power Dissipation 100 mW ⁽¹⁾ 100 mW ⁽¹⁾


Collector DC Current 30 mA 30 mA

Notes


1. Derate linearly at 0.78 mW/°C above 25°C.

SCHEMATIC

TRANSISTOR



DARLINGTON



Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

4551830 0022694 6T0
Honeywell

HOA1881

Transmissive Sensor

Fig. 1 IRED Forward Bias Characteristics

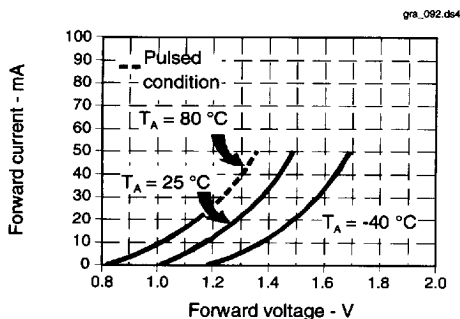


Fig. 2 Non-Saturated Switching Time vs Load Resistance

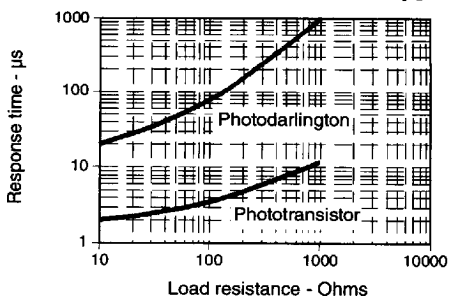


Fig. 3 Dark Current vs Temperature


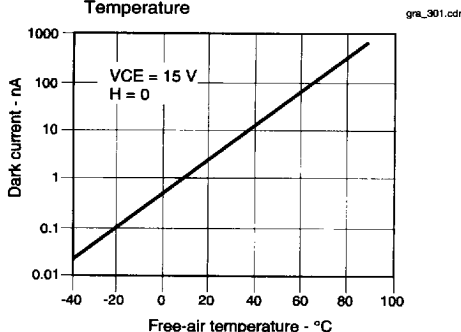


Fig. 4 Collector Current vs Ambient Temperature

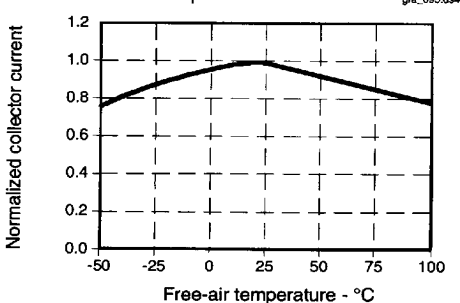

All Performance Curves Show Typical Values

4551830 0022695 537

Honeywell

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.