


HLC1395

Reflective Sensor

FEATURES

- Side-looking plastic package
- Phototransistor output
- IR emitter and phototransistor detector in a single package
- Low profile for design flexibility
- Designed for short distance detection
- High sensitivity
- Unfocused for sensing diffused surfaces

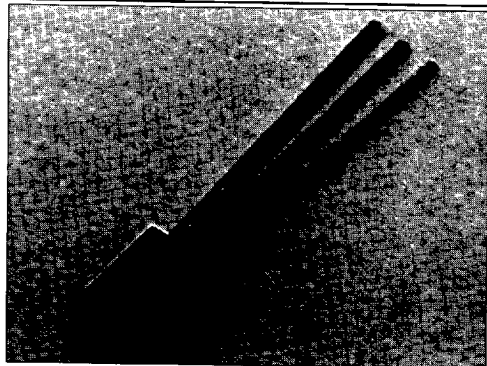

INFRA-58.TW


DESCRIPTION

The HLC1395 is a miniature infrared sensor designed to sense reflective objects at short distances. Both the GaAs IRED and the NPN phototransistor are mounted side-by-side in a single black plastic package with an integral barrier to minimize crosstalk. The sensor is configured with the IRED cathode and the phototransistor emitter connected to a common lead.

The housing consists of an opaque polysulfone outer shell with transfer-molded, IR-transmissive epoxy encapsulant. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

OUTLINE DIMENSIONS in inches (mm)

Tolerance	3 plc decimals	$\pm 0.010(0.25)$
	2 plc decimals	$\pm 0.030(0.76)$

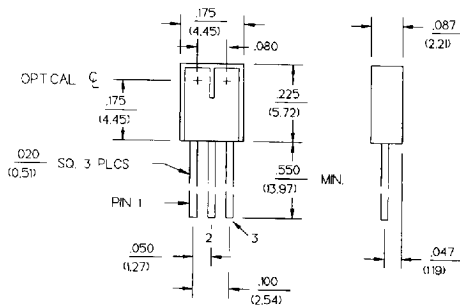

DIM_029.cdr

HLC1395

Reflective Sensor

ELECTRICAL CHARACTERISTIC (25°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
IR EMITTER						
Forward Voltage	V_F			1.6	V	$I_F=20\text{ mA}$
Reverse Current	I_R			10	μA	$V_R=3\text{ V}$
DETECTOR						
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	30			V	$I_C=100\text{ }\mu\text{A}$
Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	5.0			V	$I_E=100\text{ }\mu\text{A}$
Collector Dark Current	I_{CEO}			100	nA	$V_{CE}=10\text{ V}, I_F=0$
COUPLED CHARACTERISTICS						
On-State Collector Current	$I_{C(ON)}$				mA	$V_{CE}=5\text{ V}$ $I_F=10\text{ mA}$ (1)
HLC1395-001		0.30				
HLC1395-002		0.60				
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$			0.5	V	$I_C=40\text{ }\mu\text{A}, I_F=10\text{ mA}$ (1)
Crosstalk (2)	I_{CX}			15	μA	$V_{CE}=5\text{ V}, I_F=10\text{ mA}$
Rise And Fall Time	t_r, t_f				μs	$V_{CC}=5\text{ V}, I_C=0.3\text{ mA}$ $R_L=1000\text{ }\Omega$

Notes

1. Test surface is Eastman Kodak neutral white test card with 90% diffuse reflectance located 0.040 in. (1.0 mm) from the front surface of the device.

2. Crosstalk (I_{CX}) is the collector current measured with current to emitter and no reflecting surface.

ABSOLUTE MAXIMUM RATINGS

(25°C Free-Air Temperature unless otherwise noted)

Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-40°C to 85°C
Soldering Temperature (5 sec)	240°C

IR EMITTER

Reverse Voltage	3 V
Continuous Forward Current	50 mA
Power Dissipation	100 mW (1)


DETECTOR

Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Power Dissipation	100 mW (1)
Collector DC Current	30 mA

Notes

1. Derate linearly at 0.66 mW/°C above 25°C.

SCHEMATIC

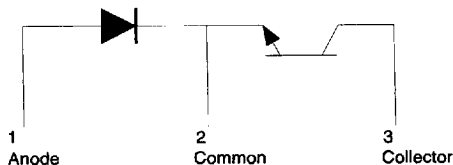

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

4551830 0022639 708

Honeywell

HLC1395

Reflective Sensor

Fig. 1 Normalized Light Current (I_L) vs Distance to Reflective Surface

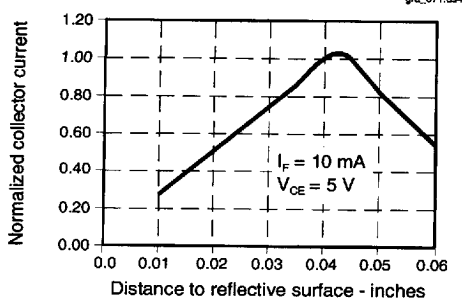


Fig. 2 Normalized Light Current (I_L) vs IRED Forward Current

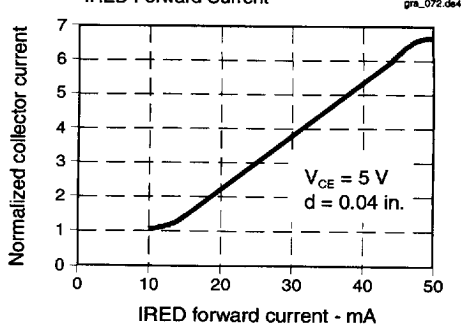


Fig. 3 IRED Forward Bias Characteristics

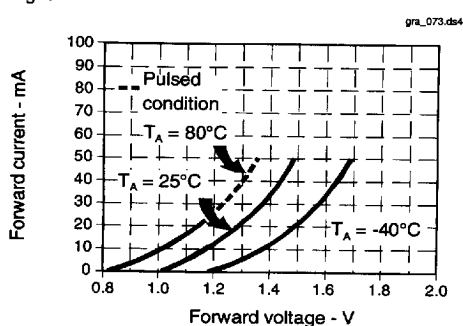


Fig. 4 Non-Saturated Switching Time vs Load Resistance

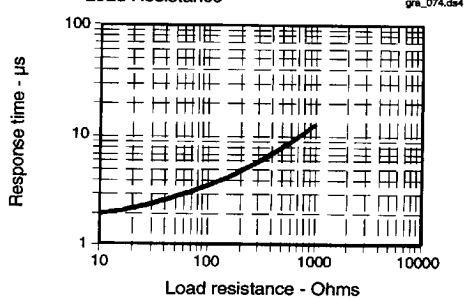


Fig. 5 Dark Current vs Temperature


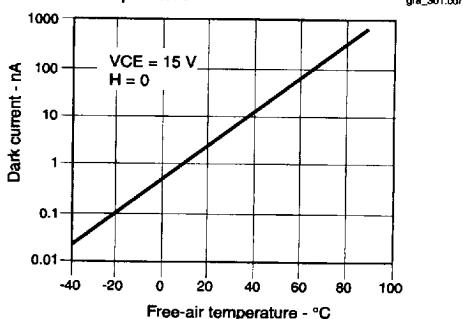


Fig. 6 Collector Current vs Ambient Temperature

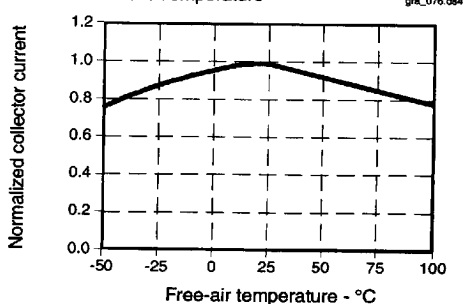

All Performance Curves Show Typical Values

4551830 0022640 42T

Honeywell

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.