

P/N: 40ST1140AX LF DATA SHEET

Feature



- Symmetrical TX and RX channels for auto MDI/MDIX capability.
- Compliant with IEEE 802.3u and ANSI X 3.263 standards including 350 uH OCL with 8 mA bias.
- Lead free for external pins.
- Operating temperature range: 0 to +70 °C.
- Storage temperature range: -25 to +125 °C.


Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL(μH Min) @ 100KHz/0.1V	Insertion Loss (dB Max)	Return Loss (dB Min)			
	TX	RX	8mA DC Bias	0.1-100MHz	2-3MHz	40MHz	50MHz	60-80MHz
40ST1140AX LF	1CT:1CT	1CT:1CT	350	-1.0	-18	-14.4	-13.1	-12

Continue

Part Number	Cross talk (dB Min)		DCMR (dB Min)			HI-POT (Vrms)
	0.3-60MHz	60-100MHz	60MHz	100MHz	200MHz	
40ST1140AX LF	-40	-35	-40	-33	-25	1500

Schematic

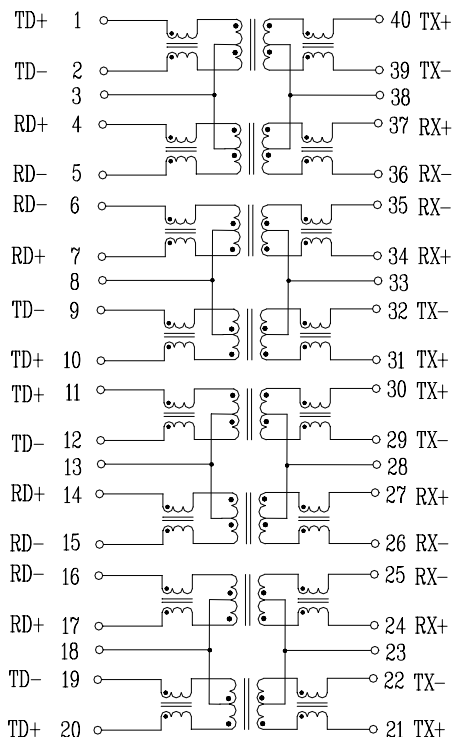

Mechanical

