


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0082285504](#)
Status: **Active**
Description: 1.27mm (.050") Pitch Round Conductor Flat Cable - 28 AWG (7 x 36) Stranded
Topcoat, 4 Circuits, Reel 30.48m (100.0') Length

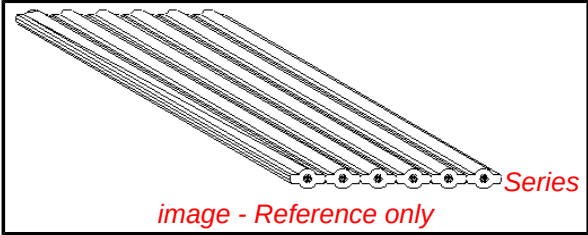

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR61126
UL	E61522

General

Product Family	Cable
Series	40158
Crimp Quality Equipment	Yes
Geographic Area	Asia
Product Name	Ribbon

Physical

Cable Length	30.48m (100.0')
Circuits (Loaded)	4
Circuits (maximum)	4
Insulation	PVC
Packaging Type	Reel
Pitch - Term. Interface (in)	0.050 In
Pitch - Term. Interface (mm)	1.27 mm
Temperature Range - Operating	-20°C to +105°C
Wire Size AWG	28
Wire/Cable Type	(7x36) Stranded, Topcoat

Electrical

Current - Maximum per Contact	N/A
Voltage - Maximum	300V

Material Info

Old Part Number	40158-04-100B
-----------------	---------------

Reference - Drawing Numbers

Sales Drawing	SD-40158-001
---------------	--------------

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Not Reviewed**
**Halogen-Free
Status
Not Reviewed**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.


Search Parts in this Series

[40158Series](#)

Use With

[70121](#) MX-50™ Slimline Ribbon Cable.
[90584](#) Picoflex® PF-50 IDT Receptacle

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

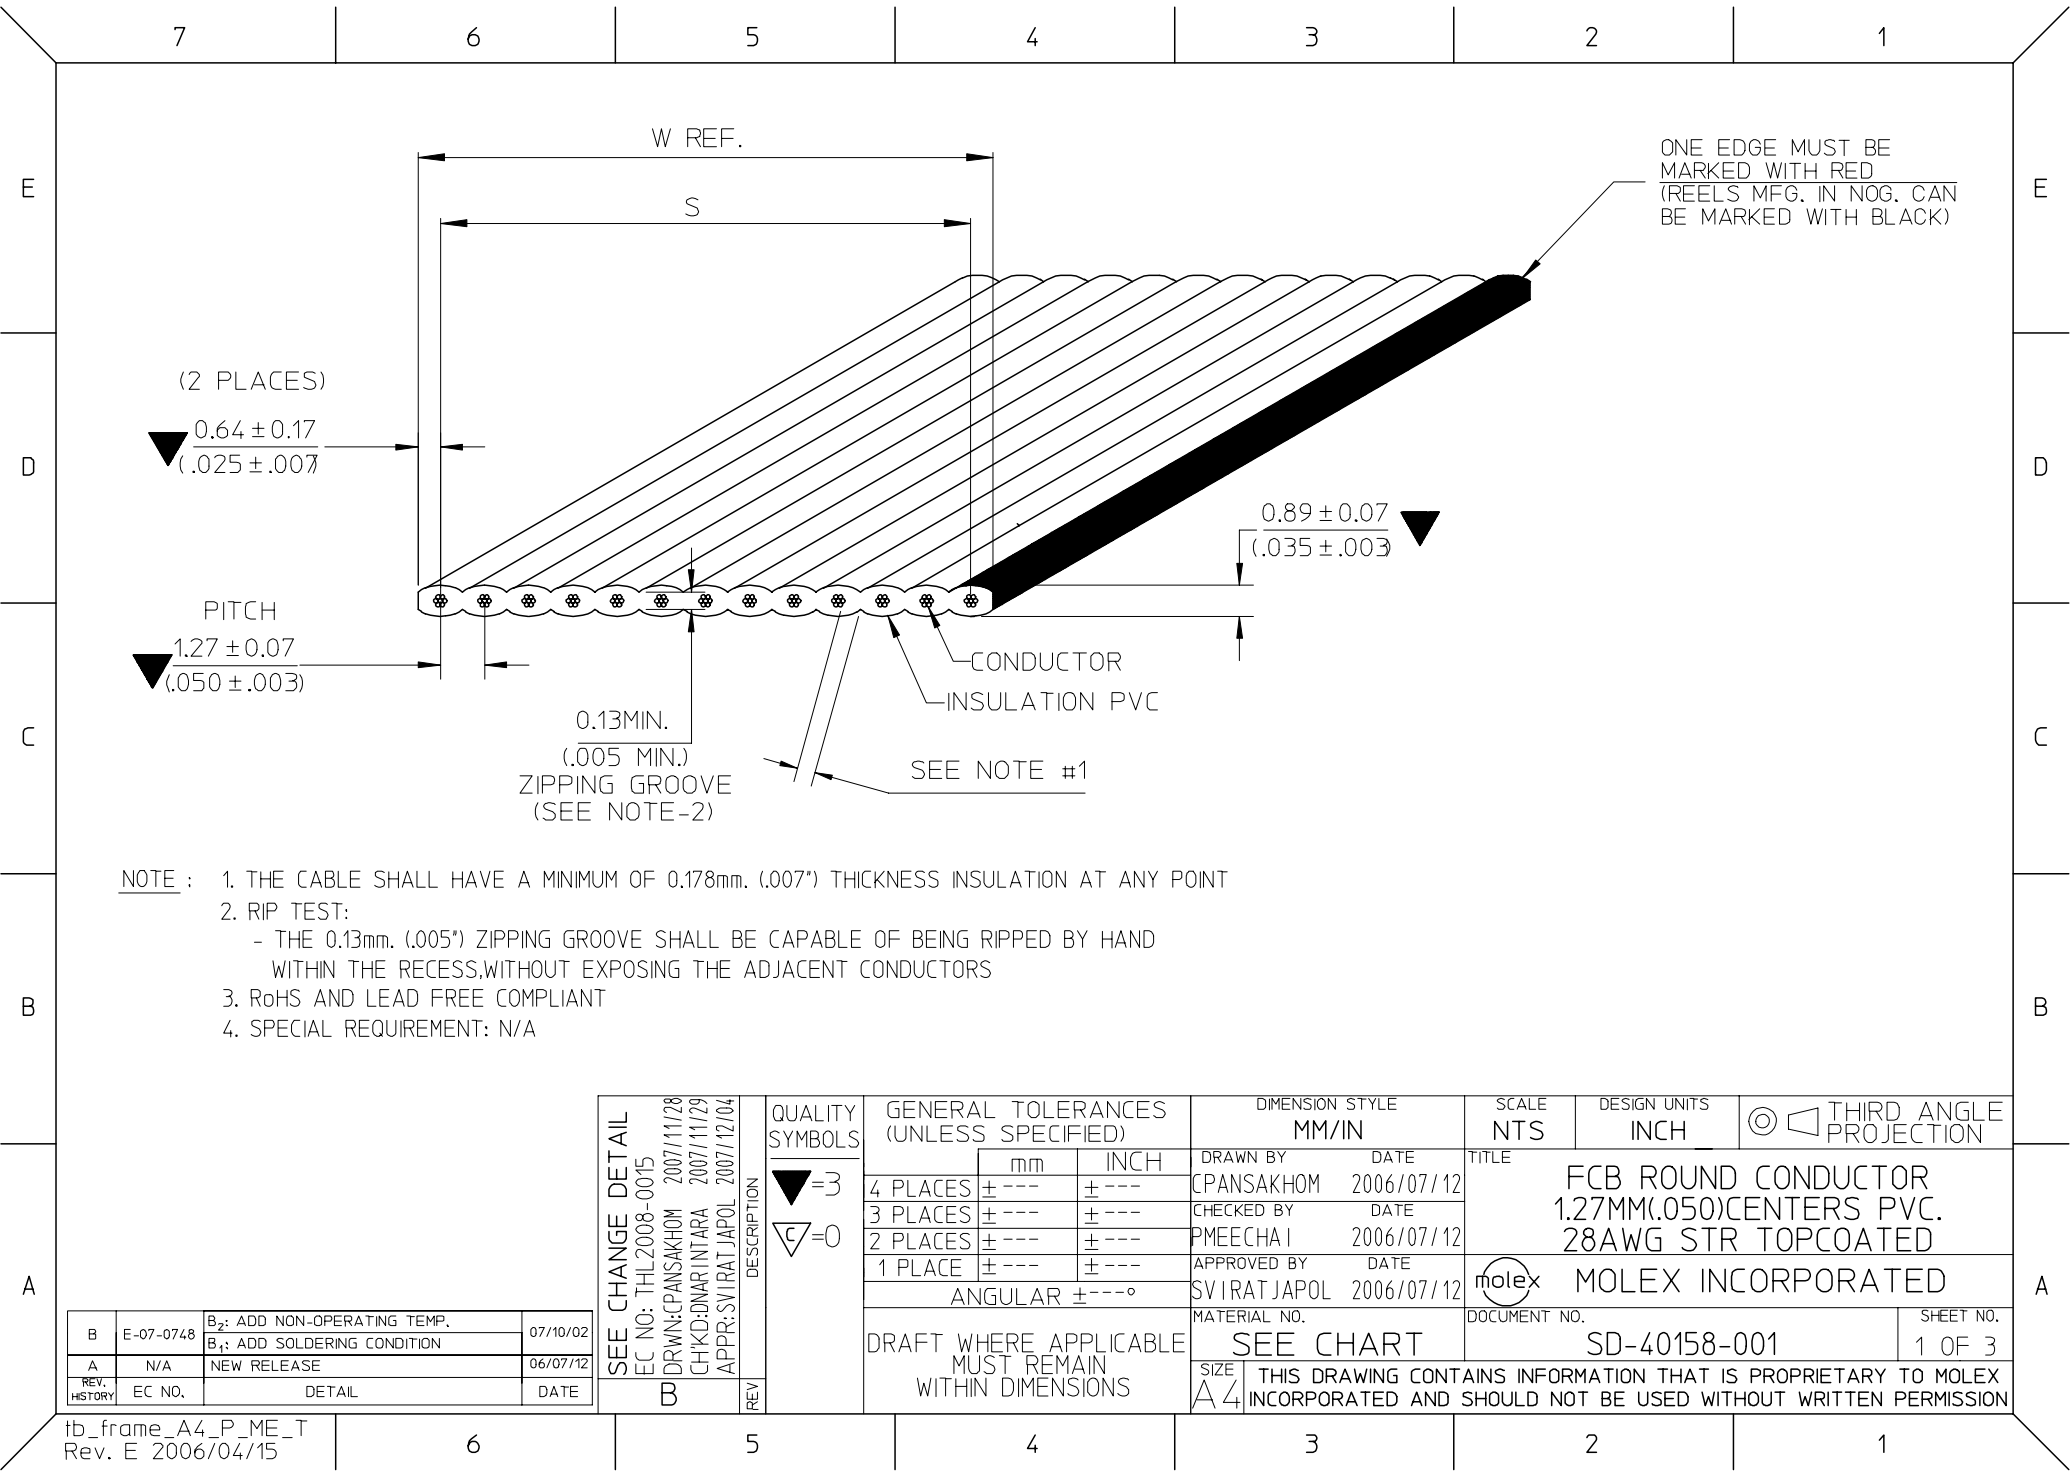

B	E-07-0748	B ₂ : ADD NON-OPERATING TEMP. B ₄ : ADD SOLDERING CONDITION	07/10/02
A	N/A	NEW RELEASE	06/07/12
REV. HISTORY	EC NO.	DETAIL	DATE

SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHKD:DNARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04	DESCRIPTION
B	REV

QUALITY SYMBOLS
▽=3
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES	± ---
3 PLACES	± ---
2 PLACES	± ---
1 PLACE	± ---
ANGULAR ± ---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
CPANSAKHOM	2006/07/12
CHECKED BY	DATE
PMEECHAI	2006/07/12
APPROVED BY	DATE
SVIRATJAPOL	2006/07/12
MATERIAL NO.	
SEE CHART	
SIZE	
A4	

SCALE NTS	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
TITLE			
FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TOPCOATED			
 MOLEX INCORPORATED			
DOCUMENT NO. SD-40158-001			SHEET NO. 1 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

7 6 5 4 3 2 1

E

E

SPECIFICATIONS

PHYSICAL

CONDUCTOR SPACING _ _ _ _ _ .127 (.050") C TO C
 WIRE GAUGE _ _ _ _ _ 28 AWG(7/36) AWG, STRANDED TOPCOATED
 INSULATION _ _ _ _ _ P.V.C GRAY (LEAD FREE)

AGENCY

U.L. STYLE NO. _ _ _ _ _ 2651
 TEMPERATURE RATING _ _ _ _ _ -20°C TO 105°C
 VOLTAGE RATING _ _ _ _ _ 300V.MAX.
 FLAMMABILITY RATING _ _ _ _ _ VW-1

ELECTRICAL

CONDUCTOR RESISTANCE (D.C.) _ _ _ _ _ 68 m OHMS/FT. MAX.
 CHARACTERISTIC IMPEDANCE _ _ _ _ _ 123 OHMS NOM. (GS)
 100 OHMS NOM. (GSG)
 CAPACITANCE _ _ _ _ _ 9.1 pF/FT. NOM. (GS)
 17.0 pF/FT. NOM. (GSG)
 PROPAGATION DELAY _ _ _ _ _ 1.4 ns/FT. NOM.
 INSULATION RESISTANCE _ _ _ _ _ 10M OHMS (10FT. SAMPLE)
 DIELECTRIC WITHSTAND VOLTAGE _ _ _ _ _ 2000 VRMS/MINUTE

GENERAL

$\triangle B_2$ NON-OPERATING TEMPERATURE _ _ _ _ _ -20°C TO 105°C
 FAULTS AND/OR SPLICES _ _ _ _ _ 1/REEL MAX. 100 ± 3 FT. (30.48 ± 0.914 M.)/REEL
 20FT. (6.096M.) MIN. LENGTH

$\triangle B_1$ SOLDERING CONDITION

SOLDER TEMPERATURE _ _ _ _ _ 260°C. MAX.
 SOLDERING TIME _ _ _ _ _ 3 SECOND, MAX.
 INSULATION SHRINK _ _ _ _ _ 2MM. NOM

D

D

C

C

B

B

A

A

SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHKD:DNARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04	DESCRIPTION	QUALITY SYMBOLS ▽ = ▽C =	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TOPCOATED				
			4 PLACES	± ---	± ---	CHECKED BY PMEECHAI	DATE 2006/07/12					
			3 PLACES	± ---	± ---	APPROVED BY SVIRATJAPOL	DATE 2006/07/12					
			2 PLACES	± ---	± ---	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-40158-001	SHEET NO. 2 OF 3			
			1 PLACE	± ---	± ---							
			ANGULAR ± ---°									
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									

