


FEATURES

- High Output Power: $P_{1dB} = 30dBm$ (Typ.)
- High Gain: $G_{1dB} = 14dB$ (Typ.)
- High PAE: $\eta_{add} = 20\%$ (Typ.)
- Wide Frequency Band: 27.5-31.5 GHz
- Impedance Matched $Z_{in}/Z_{out} = 50\Omega$
- 0.25 μm PHEMT Technology

DESCRIPTION

The FMM5803X is a high-gain, wide band 3-stage MMIC amplifier designed for operation in the 27.5-31.5 GHz frequency range. This amplifier has an input and output designed for use in 50 Ω systems. This device is well suited for point-to-point, and point-to-multi-point(LMDS) communication applications.

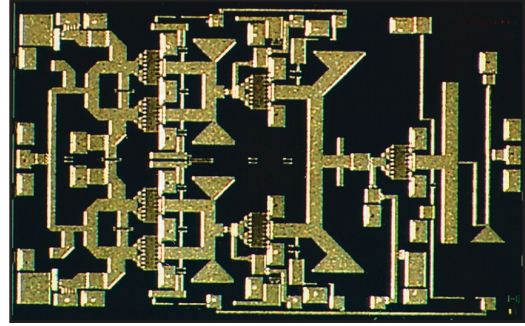

ABSOLUTE MAXIMUM RATING (Ambient Temperature $T_a=25^\circ C$)

Item	Symbol	Condition	Rating	Unit
Drain Voltage	V_{DD}		10	V
Gate Voltage	V_{GG}		-3.0	V
Input Power	P_{in}		25	dBm
Storage Temperature	T_{stg}		-65 to +175	$^\circ C$
Operating Backside Temperature	T_{op}		-40 to +85	$^\circ C$

Fujitsu recommends the following conditions for the long term reliable operation of GaAs FETs:

1. The drain-source operating voltage (V_{DD}) should not exceed 6 volts.
2. The forward and reverse gate currents should not exceed 4.0 and -0.33 mA respectively.
3. This product should be hermetically packaged


ELECTRICAL CHARACTERISTICS (Ambient Temperature $T_a=25^\circ C$)

Item	Symbol	Conditions	Limits			Unit
			Min.	Typ.	Max.	
Frequency Range	f		27.5 - 31.5			GHz
Output Power at 1 dB G.C.P.	P_{1dB}		28	30	-	dBm
Power Gain at 1 dB G.C.P.	G_{1dB}	$V_{DD} = 6V$ $f = 27.5 \sim 31.5$ GHz	12*	14*	19*	dB
Drain Current	I_{ddrf}	*: at $f = 27.5-30.0$ GHz *: at $f = 30.0-31.5$ GHz	-	700	950	mA
Power-Added Efficiency	η_{add}	$I_{DD} = 650mA$ (Typ.) $Z_S = Z_L = 50\Omega$	-	20	-	%
Input Return Loss	RL_{in}		-	-12	-	dB
Output Return Loss	RL_{out}		-	-8	-	dB


Note: RF parameter sample size 10pcs./wafer. Criteria (accept/reject)=(0/1)

G.C.P.: Gain Compression Point


P1dB, G1dB vs. FREQUENCY

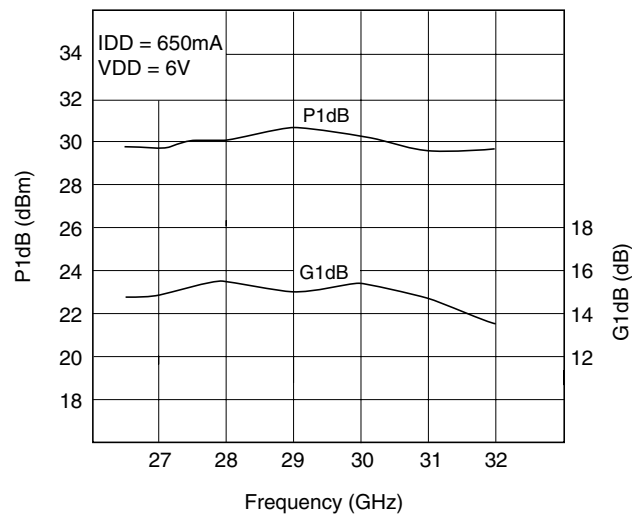


OUTPUT POWER vs. IMD

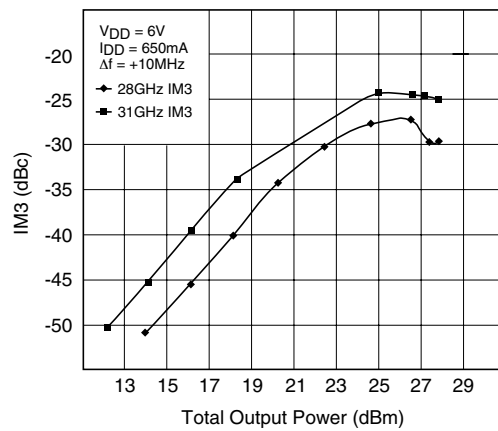

BONDING LAYOUT

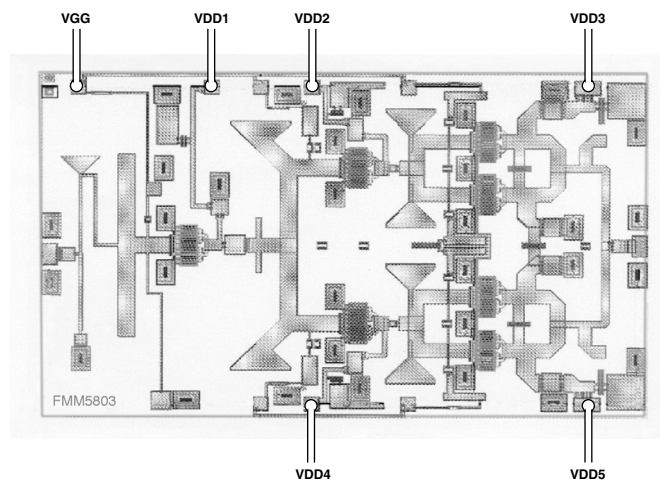

ASSEMBLY DRAWING

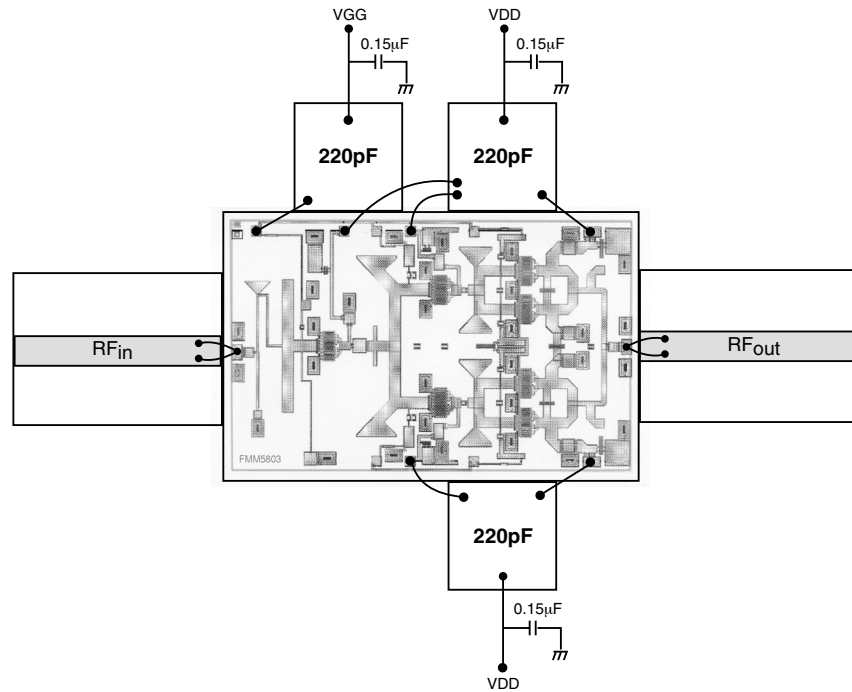


S-PARAMETERS

$V_{DD} = 6V$, $I_{DS} = 650mA$

FREQUENCY (MHZ)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
24000	.685	36.1	3.270	-30.4	.001	53.8	.230	15.4
24500	.618	16.4	3.920	-59.5	.001	34.9	.152	-12.0
25000	.547	-7.8	4.650	-89.6	.002	15.1	.111	-57.1
25500	.487	-37.2	5.380	-121.0	.002	-9.3	.129	-106.0
26000	.442	-71.2	6.100	-155.1	.002	-35.1	.176	-136.9
26500	.420	-106.9	6.540	171.1	.003	-63.8	.227	-157.6
27000	.415	-138.7	6.620	137.8	.003	-97.3	.272	-174.5
27500	.404	-166.3	6.540	107.0	.003	-120.0	.306	170.7
28000	.379	169.0	6.500	76.5	.003	-146.2	.328	156.0
28500	.337	148.9	6.520	45.8	.004	-173.6	.338	140.8
29000	.283	130.6	6.450	15.7	.004	159.7	.343	124.5
29500	.227	113.1	6.390	-14.8	.005	136.1	.341	106.4
30000	.171	99.3	6.310	-45.0	.005	110.3	.339	85.5
30500	.130	91.2	6.270	-77.3	.006	84.9	.347	61.8
31000	.126	80.2	6.130	-111.1	.008	54.5	.370	35.9
31500	.171	60.5	5.800	-147.2	.008	24.3	.415	9.7
32000	.274	29.4	5.250	173.0	.008	-11.8	.476	-15.7
32500	.423	-6.5	4.430	133.0	.008	-49.4	.533	-39.0
33000	.565	-38.7	3.310	93.7	.007	-83.8	.569	-58.4
33500	.668	-64.6	2.330	57.4	.006	-117.9	.589	-73.2

FMM5803X

27.5-31.5GHz Power Amplifier MMIC

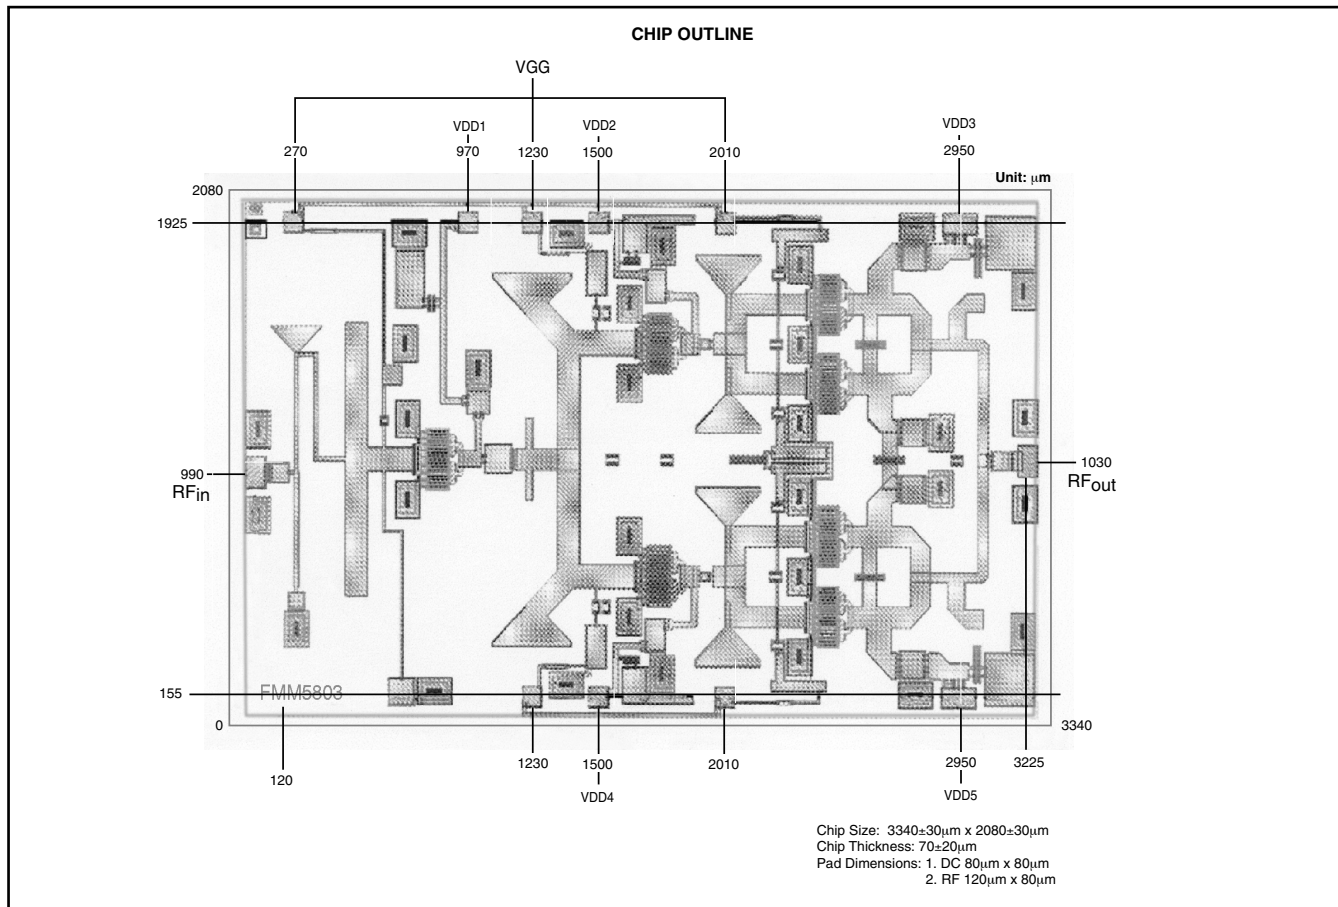

For further information please contact:

FUJITSU COMPOUND SEMICONDUCTOR, INC.

2355 Zanker Rd.

San Jose, CA 95131-1138, U.S.A.

Phone: (408) 232-9500

FAX: (408) 428-9111

www.fcsi.fujitsu.com

FUJITSU MICROELECTRONICS, LTD.

Compound Semiconductor Division

Network House

Norreys Drive

Maidenhead, Berkshire SL6 4FJ

Phone: +44 (0)1628 504800

FAX: +44 (0)1628 504888

CAUTION

Fujitsu Compound Semiconductor Products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not ingest.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Fujitsu Limited reserves the right to change products and specifications without notice.
The information does not convey any license under rights of Fujitsu Limited or others.

© 2000 FUJITSU COMPOUND SEMICONDUCTOR, INC.

Printed in U.S.A. FCSI0200M200

FUJITSU