



Double-Balanced Mixer 5-500 MHz

MD-108/143/146

- Low Cost
- 7 dB Typical Conversion Loss
- Available in Three Models

Guaranteed Specifications*

(From -55°C to +85°C)

Frequency Range	RF, LO Ports	5-500 MHz
	IF Port	DC-500 MHz
Conversion Loss	5-150 MHz	7.0 dB Max
	150-500 MHz	9.0 dB Max
Isolation	LO to RF	(5-150 MHz) 40 dB Min
		(150-500 MHz) 35 dB Min
	LO to IF	(5-150 MHz) 35 dB Min
		(150-500 MHz) 25 dB Min
	RF to IF	(5-150 MHz) 25 dB Min
		(150-500 MHz) 20 dB Min

Operating Characteristics

Impedance	50 Ohms Nominal
Maximum Input	
Total Power	400 mW Max @ 25°C
	Derated to 85°C @ 3.2 mW/°C
IF Port Current	50 mA Max
DC Polarity	Negative (Positive if LO input at pin 5)
DC Offset	≤ 1 mV Typical
RF Input	
1 dB Compression	+2.5 dBm Typical
1 dB Desensitization	0 dBm Typical
SSB Noise Figure	Within 1 dB of Conversion Loss Max
Typical Two-Tone IM Ratio	100-350 MHz ≥ 55 dB
(with -10 dBm input, each	350-500 MHz ≥ 40 dB
input 25 MHz and 35 MHz IF)	
Environmental	
See Appendix for MIL-STD-883 screening option.	
Pin Configuration	
	(MD-108) LO; P1 & P5, RF; P8, IF; P3 & P7***
	(MD-146) LO; P1 & P5, RF; P8 & P4, IF; P3 & P7***


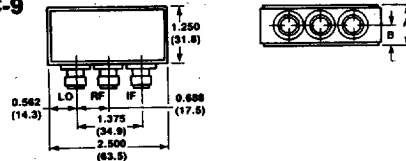
All specifications apply when operated at +7 dBm available LO power with 50 ohm source and load impedance.

**No internal connection.

***P3 and P7 are connected together to make IF port.

Ordering Information

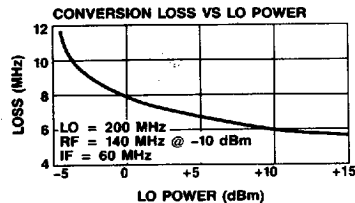
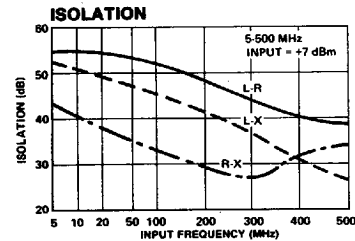
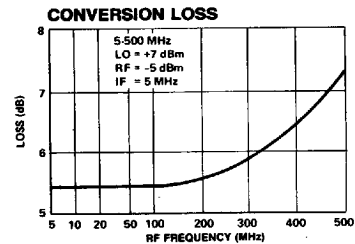
Model No.	Package
MD-108 PIN	Relay Header
MD-143 BNC	Connectorized
MD-146 PIN	Relay Header

RH-3

C-9


Dimensions in () are in mm.

See Appendix for complete physical dimensions.

Typical Performance



Specifications Subject to Change Without Notice.

M/A-COM Inc. ■ 1011 Pawtucket Boulevard, Lowell, MA 01853 USA

Telephone: 800-366-2266