

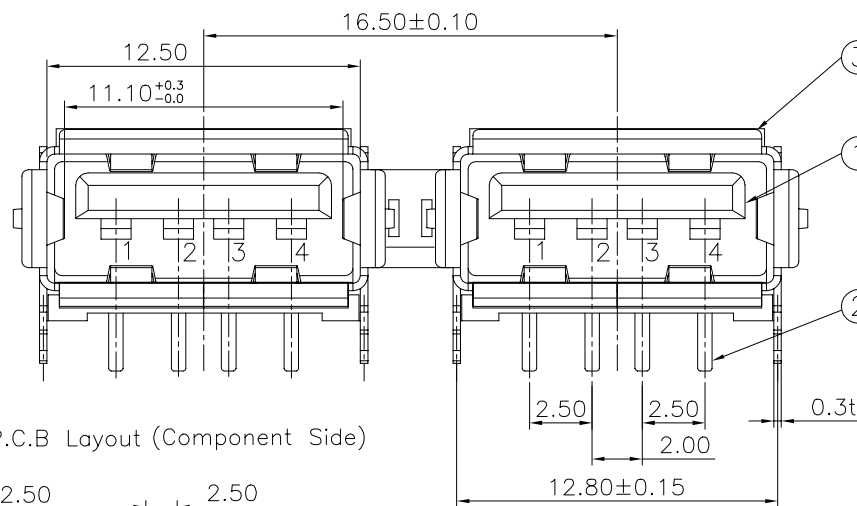


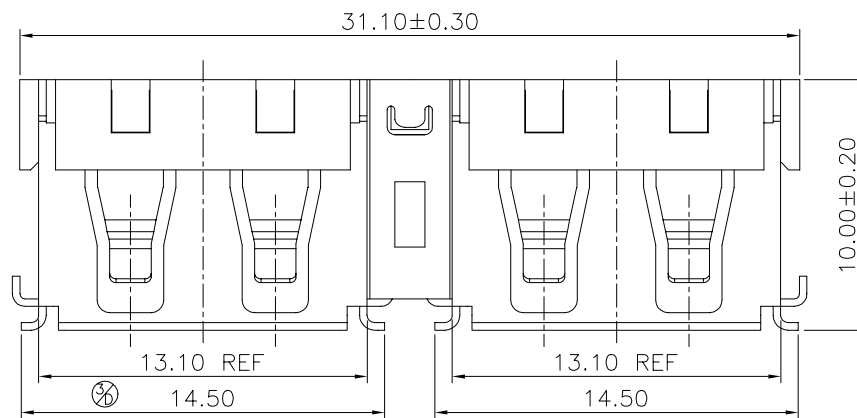


Recommended P.C.B Layout (Component Side)

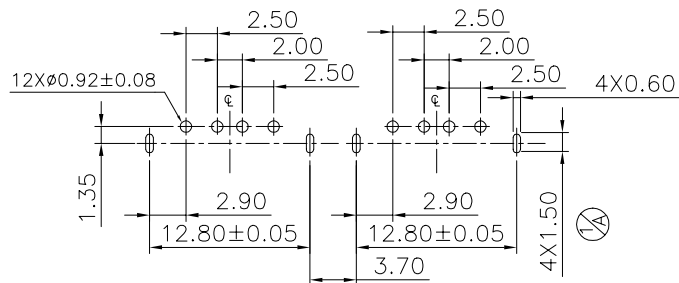

NOTE :

020167MR008 02ZU

1. Selective plating
'S1,-05u" select gold in contact/
Min. 100u" tin in solder area
'S2,-Gold flash in contact area/
Min. 100u" tin in solder area
'S3,-10u" select gold in contact/
Min. 100" tin in solder area
'S4,-15u" select gold in contact/
Min. 100u" tin in solder area
'S5,-30u" select gold in contact/
Min. 100u" tin in solder area
'S6,-50u" select gold in contact/
Min. 100u" tin in solder area

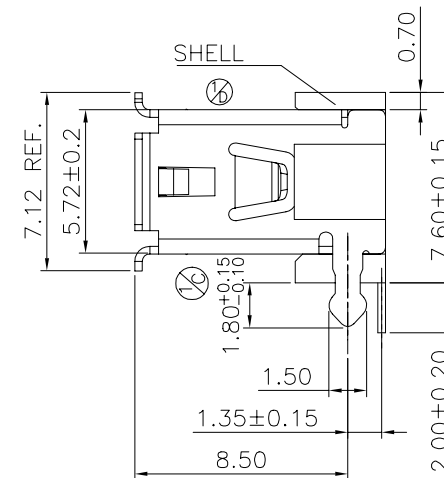

4			
3	SHELL	Brass	Nickel Plated
2	TERMINAL	Pho.Bronze	Selective Gold/Tin
1	HOUSING	NY6T	BLACK
NO. DESCRIPTION		MATERIAL	COLOR
			REMARK

SUYIN
CONNECTOR

CUSTOMER COPY	TITLE: USB SERIES A, R/A Dual Type Short body DIP TYPE		
PART NO.	020167MR008SX02ZU		
PART NO. (OLD)	2567A-08GXT		
DRAWING NO.	D	020167MR008SX02ZU	
SCALE	4:1	UNIT	mm
			A4

ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED
EC1T-021107-16	C	02/11/07	D1:變更彈片方向 ; D2:變更料號 D3:14.60->14.50 ; D4:變更NOTE			Angle ±2° 30 ~ 30 ±0.50
EC1T-020227-01	B	02/02/27	C1:1.08->1.80±0.15 B1:ADD 電源系列	婁倫菲 張志瑋	游千儀 宋權哲	10 ~ 30 ±0.30 ~ 10 ±0.15