

PART NUMBERS


Package Style	Output Current Designator	Circuit Type	AC Line Voltage	Options	Terminal Designator
FB Series	5 25 Amps	1 Common Cathode	1 120 Vac	F Free Wheeling	-2T Standard
Designator	6 42.5 Amps	Full Wave Bridge	2 240 Vac	Diode	-2 Isolation Barrier
		2 Common Anode	3 280 Vac	-012 EZ Mount™	
		Full Wave Bridge	4 480 Vac		
		4 SCR Full Wave Bridge			
		5 AC Switch			

Add Options Suffix to Part Number, as desired, in order shown.



Part Number Example: **FB512F-012-2T**

MECHANICAL SPECIFICATION


Terminal Style 2T

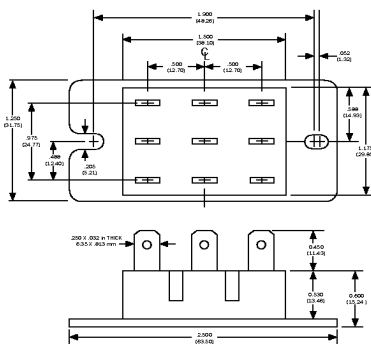


Terminal Style 2

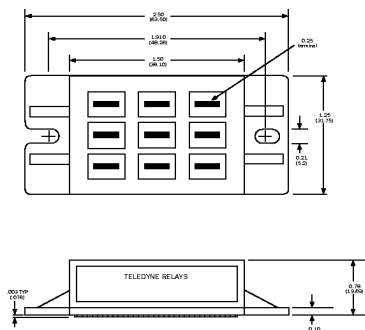

TERMINAL ASSIGNMENTS



SERIES B CIRCUITS

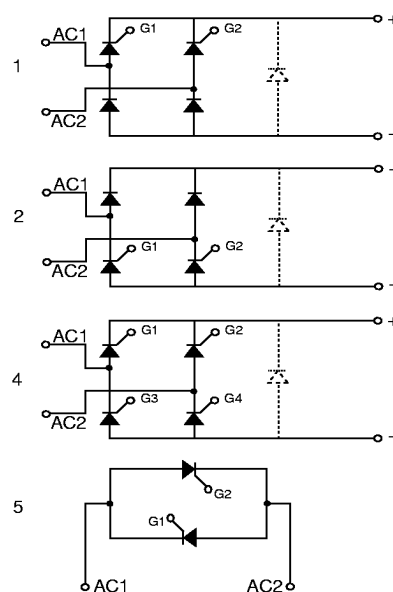

ELECTRICAL SPECIFICATIONS

SYMBOL SPECIFICATION		RATINGS	
		FB5	FB6
I_D	Maximum DC Output Current @Tc=85°C(A)	25	42.5
V_F	Maximum Voltage Drop @Amps Peak	1.65V@25A	1.6V@42.5A
T_J	Operating Junction Temperature Range	-40°C to +125°C	
di/dt	Critical Rate of Rise of On-State Current @Tj=125°C(A/μs)	100	
dv/dt	Critical Rate of Rise of Off-State Voltage @Tj=125°C(V/μs)	500	
V_{RMS}	AC Line Input Voltage (Repetitive Peak Reverse Voltage)	—120 (400V _{RRM})— —240 (600V _{RRM})— —280 (800V _{RRM})— —480 (1200V _{RRM})—	
I_{TSM}	Maximum Non-Repetitive Surge Current (A) [1/2 Cycle, 60Hz]	300	600
I^2T	Maximum I ² T for Fusing (A ² sec) [t=8.3ms]	370	1500
I_{GT}	Maximum Required Gate Current to Trigger @25°C (mA)	60	80
V_{GT}	Maximum Required Gate Voltage to Trigger @25°C (V)	2.5	3.0
$P_{G(AV)}$	Average Gate Power	0.5W	
V_{GM}	Maximum Peak Gate Voltage (Reverse)	5.0V	
$R_{\theta jc}$	Maximum Thermal Resistance Junction to Ceramic Base per Chip	0.9°C/W	0.7°C/W
V_{ISOL}	Isolation Voltage	2500 V _{RMS}	

FEATURES/BENEFITS

- Circuit Modules provide ratings up to 42.5 amps.
- Thermal managed construction yields superior thermal impedance and power cycling capabilities.
- Available in four circuits.
- Exposed ceramic baseplate for reduced thermal resistance and best thermal performance.
- All models have 2500 Vrms isolation.
- UL Certified: File #E66830.

TYPICAL APPLICATIONS

- On/Off control of high power AC equipment.
- Motor control.
- Can be used singly or as a power control building blocks.