

FEATURES

- 17 μ A Max Supply Current per Amplifier
- 70 μ V Max Offset Voltage
- 250pA Max Offset Current
- 5nA Max Input Bias Current
- 0.9 μ Vp-p 0.1Hz to 10Hz Voltage Noise
- 1.5pAp-p 0.1Hz to 10Hz Current Noise
- 0.5 μ V/ $^{\circ}$ C Offset Voltage Drift
- 85kHz Gain-Bandwidth-Product
- 0.04V/ μ s Slew Rate
- Single Supply Operation
 - Input Voltage Range Includes Ground
 - Output Swings to Ground while Sinking Current
 - No Pull Down Resistors are Needed
- Output Sources and Sinks 5mA Load Current

APPLICATIONS

- Battery or Solar Powered Systems
 - Portable Instrumentation
 - Remote Sensor Amplifier
 - Satellite Circuitry
- Micropower Sample and Hold
- Thermocouple Amplifier
- Micropower Filters

DESCRIPTION


The LT1178 is a micropower dual op amp in the standard 8-pin configuration; the LT1179 is a micropower quad op amp offered in the standard 14-pin packages. Both devices are optimized for single supply operation at 5V. Specifications are also provided at ± 15 V supplies.

The extremely low supply current is combined with true precision specifications: offset voltage is 30 μ V, offset current is 50pA. Both offset parameters have low drift with temperature. The 1.5pAp-p current noise and picoampere offset current permit the use of megaohm level source resistors without introducing serious errors. Voltage noise, at 0.9 μ Vp-p, is remarkably low considering the low supply current.


Both the LT1178 and LT1179 can be operated from a single supply (as low as one lithium cell or two Ni-cad batteries). The input range goes below ground. The all-NPN output stage swings to within a few millivolts of ground while sinking current—no power consuming pull down resistors are needed.

For applications where three times higher supply current is acceptable, the micropower LT1077 single, LT1078 dual and LT1079 quad are recommended. The LT1077/78/79 have significantly higher bandwidth, slew rate; lower voltage noise and better output drive capability.

Self-Buffered, Dual Output, Micropower Reference

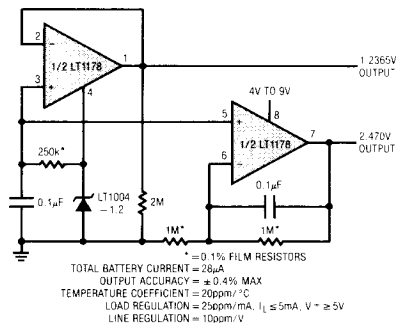

Supply Current vs Temperature



ABSOLUTE MAXIMUM RATINGS

Supply Voltage	± 22V
Differential Input Voltage	± 30V
Input Voltage	Equal to Positive Supply Voltage
	5V Below Negative Supply Voltage
Output Short Circuit Duration	Indefinite

Operating Temperature Range

LT1178I/LT1179I	– 40°C to 85°C
LT1178C/LT1178S/LT1179C/LT1179S	0°C to 70°C
Storage Temperature Range	– 65°C to 150°C
Lead Temperature (Soldering, 10 sec.)	300°C

PACKAGE/ORDER INFORMATION

TOP VIEW V+ OUTPUT A -IN A +IN A V- (CASE) H PACKAGE 8-LEAD TO-5 METAL CAN	ORDER PART NUMBER LT1178ACH LT1178CH	TOP VIEW OUTPUT A -IN A +IN A V- -IN B +IN B OUTPUT B J PACKAGE 8-LEAD CERAMIC DIP N PACKAGE 8-LEAD PLASTIC DIP	ORDER PART NUMBER LT1178ACJ8 LT1178CJ8 LT1178ACN8 LT1178CN8 LT1178IN8	TOP VIEW OUTPUT A -IN A +IN A V- -IN B +IN B OUTPUT B J PACKAGE 14-LEAD CERAMIC DIP N PACKAGE 14-LEAD PLASTIC DIP	ORDER PART NUMBER LT1179ACJ LT1179CJ LT1179ACN LT1179CN LT1179IN
TOP VIEW NC NC OUTPUT A -IN A +IN A V- NC NC NC NC V+ OUTPUT B -IN B +IN B NC NC S PACKAGE 16-LEAD PLASTIC SOL	ORDER PART NUMBER LT1178S	TOP VIEW OUTPUT A -IN A +IN A V+ -IN B +IN B OUTPUT B NC S PACKAGE 16-LEAD PLASTIC SOL	ORDER PART NUMBER LT1179S		

2

ELECTRICAL CHARACTERISTICS $V_S = 5V, 0V, V_{CM} = 0.1V, V_O = 1.4V, T_A = 25^\circ C$, unless noted.

SYMBOL	PARAMETER	CONDITIONS (NOTE 1)	LT1178AC/1179AC			LT1178I/C/S/1179I/C/S			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	LT1178 LT1179 LT1178S LT1179S		30 35	70 100		40 40 80 90	120 150 450 600	μV
ΔV_{OS} $\Delta Time$	Long Term Input Offset Voltage Stability			0.5			0.6		$\mu V/Mo$
I_{OS}	Input Offset Current			0.05	0.25		0.05	0.35	nA
I_B	Input Bias Current			3	5		3	6	nA
e_n	Input Noise Voltage	0.1Hz to 10Hz (Note 2)		0.9	2.0		0.9		μV_{p-p}
	Input Noise Voltage Density	$f_o = 10Hz$ (Note 2) $f_o = 1000Hz$ (Note 2)		50 49	75 65		50 49		$nV/\sqrt{Hz}$ $nV/\sqrt{Hz}$
i_n	Input Noise Current	0.1Hz to 10Hz (Note 2)		1.5	2.5		1.5		pA $_{p-p}$
	Input Noise Current Density	$f_o = 10Hz$ (Note 2) $f_o = 1000Hz$		0.03 0.01	0.07		0.03 0.01		pA $_{p-p}/\sqrt{Hz}$ pA $_{p-p}/\sqrt{Hz}$
	Input Resistance Differential Mode Common-Mode	(Note 3)		0.8 12	2.0 12		0.6 12	2.0 12	G Ω G Ω
	Input Voltage Range			3.5 0	3.9 –0.3		3.5 0	3.9 –0.3	V V
CMRR	Common-Mode Rejection Ratio	$V_{CM} = 0V$ to 3.5V		93	103		90	102	dB
PSRR	Power Supply Rejection Ratio	$V_S = 2.2V$ to 12V		94	104		92	104	dB

ELECTRICAL CHARACTERISTICS $V_S = 5V$, $0V$, $V_{CM} = 0.1V$, $V_O = 1.4V$, $T_A = 25^\circ C$, unless noted.

SYMBOL	PARAMETER	CONDITIONS (NOTE 1)	LT1178AC/1179AC			LT1178I/C/S/1179I/C/S			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
A_{VOL}	Large Signal Voltage Gain	$V_O = 0.03V$ to $4V$, No Load (Note 3) $V_O = 0.03V$ to $3.5V$, $R_L = 50k$	140 80	700 200		110 70	700 200		V/mV V/mV
	Maximum Output Voltage Swing	Output Low, No Load Output Low, $2k$ to GND Output Low, $I_{SINK} = 100\mu A$ Output High, No Load Output High, $2k$ to GND		6.5 0.2 120 4.2 3.5	9 0.6 160		6.5 0.2 120 4.4 3.8	9 0.6 160	mV mV mV V V
SR	Slew Rate	$A_V = +1$, $C_L = 10pF$ (Note 3)	0.013	0.025		0.013	0.025		V/ μs
GBW	Gain Bandwidth Product	$f_0 \leq 5kHz$		60			60		kHz
I_S	Supply Current per Amplifier	$V_S = \pm 1.5V$, $V_O = 0V$		13 12	18 17		14 13	21 20	μA μA
	Channel Separation	$\Delta V_{IN} = 3V$, $R_L = 10k$		130			130		dB
	Minimum Supply Voltage	(Note 4)		2.0	2.2		2.0	2.2	V

ELECTRICAL CHARACTERISTICS $V_S = 5V$, $0V$, $V_{CM} = 0.1V$, $V_O = 1.4V$, $-40^\circ C \leq T_A \leq 85^\circ C$ for I grades, $0^\circ C \leq T_A \leq 70^\circ C$ for S grades, unless noted. (Note 6)

SYMBOL	PARAMETER	CONDITIONS		LT1178/1179I			LT1178S/1179S			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V _{OS}	Input Offset Voltage	LT1178 LT1179	● ●		80 80	315 345		120 130	650 800	μV μV
ΔV _{OS} /ΔT	Input Offset Voltage Drift	(Note 5)	●		0.6	3.0		0.8	4.5	μV/°C
I _{OS}	Input Offset Current		●		0.07	0.7		0.06	0.50	nA
I _B	Input Bias Current		●		4	8		3	7	nA
CMRR	Common-Mode Rejection Ratio	V _{CM} = 0.05V to 3.2V I grade V _{CM} = 0V to 3.4V S grade	●	84	98		86	100		dB
PSRR	Power Supply Rejection Ratio	V _S = 3.0V to 12V I grade V _S = 2.5V to 12V S grade	●	86	100		88	102		dB
A _{VOL}	Large Signal Voltage Gain	V _O = 0.05V to 4V, No Load (Note 3) V _O = 0.05V to 3.5V, R _L = 50k	● ●	55 35	350 130		80 45	500 160		V/mV V/mV
	Maximum Output Voltage Swing	Output Low, No Load Output Low, I _{SNK} = 100μA Output High, No Load Output High, 2k to GND	● ● ● ●		9 160 3.9 3.0	13 220 4.2 3.7		8 140 4.1 3.3	11 190 4.3 3.8	mV mV V V
I _S	Supply Current per Amplifier		●		15	27		15	24	μA

ELECTRICAL CHARACTERISTICS $V_S = 5V$, $0V$, $V_{CM} = 0.1V$, $V_O = 1.4V$, $0^\circ C \leq T_A \leq 70^\circ C$, unless noted.

SYMBOL	PARAMETER	CONDITIONS		LT1178AC/1179AC			LT1178C/1179C			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V _{OS}	Input Offset Voltage	LT1178 LT1179	● ●		50 60	170 200		65 70	250 290	μV μV
ΔV _{OS} /ΔT	Input Offset Voltage Drift	(Note 5)	●		0.5	2.2		0.6	3.0	μV/°C
I _{OS}	Input Offset Current		●		0.06	0.35		0.06	0.50	nA
I _B	Input Bias Current		●		3	6		3	7	nA
CMRR	Common-Mode Rejection Ratio	V _{CM} = 0V to 3.4V	●		90	101		86	100	dB
PSRR	Power Supply Rejection Ratio	V _S = 2.5V to 12V	●		90	102		88	102	dB
A _{VOL}	Large Signal Voltage Gain	V _O = 0.05V to 4V, No Load (Note 3) V _O = 0.05V to 3.5V, R _L = 50K	● ●		105 55	500 160		80 45	500 160	V/mV V/mV
	Maximum Output Voltage Swing	Output Low, No Load Output Low, I _{SINK} = 100μA Output High, No Load Output High, 2k to GND	● ● ● ●			8 140 4.1 3.3		8 140 4.1 3.3	11 190	mV mV V V
I _S	Supply Current per Amplifier		●		14	21		15	24	μA

ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$, $T_A = 25^\circ C$, unless noted.

SYMBOL	PARAMETER	CONDITIONS	LT1178AC/1179AC			LT1178C/S/1179C/S			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	LT1178S LT1179S		80	350		100 150 160	480 900 1050	μV μV μV
I_{OS}	Input Offset Current			0.05	0.25		0.05	0.35	nA
I_B	Input Bias Current			3	5		3	6	nA
	Input Voltage Range		13.5 – 15.0	13.9 – 15.3		13.5 – 15.0	13.9 – 15.3		V V
CMRR	Common-Mode Rejection Ratio	$V_{CM} = 13.5V$, $-15V$	97	106		94	106		dB
PSRR	Power Supply Rejection Ratio	$V_S = 5V$, $0V$ to $\pm 18V$	96	112		94	112		dB
A_{VOL}	Large Signal Voltage Gain	$V_O = \pm 10V$, $R_L = 50k$ $V_O = \pm 10V$, No Load	300 600	1200 2500		250 400	1000 2500		V/mV V/mV
V_{OUT}	Maximum Output Voltage Swing	$R_L = 50k$ $R_L = 2k$	± 13.0 ± 11.0	± 14.2 ± 12.7		± 13.0 ± 11.0	± 14.2 ± 12.7		V V
SR	Slew Rate	$A_V = +1$	0.02	0.04		0.02	0.04		V/ μs
GBW	Gain Bandwidth Product	$f_0 \leq 5kHz$		85			85		kHz
I_S	Supply Current per Amplifier			16	21		17	25	μA

ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$, $-40^\circ C \leq T_A \leq 85^\circ C$ for I grades, $0^\circ C \leq T_A \leq 70^\circ C$ for S grades, unless noted.

SYMBOL	PARAMETER	CONDITIONS		LT1178I/1179I			LT1178S/1179S			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	LT1178 LT1179	● ●		130 130	740 740		190 200	1150 1300	μV μV
$\Delta V_{OS}/\Delta T$	Input Offset Voltage Drift	(Note 5)	●		0.7	4.0		0.9	5.5	$\mu V/^\circ C$
I_{OS}	Input Offset Current		●		0.07	0.7		0.06	0.35	nA
I_B	Input Bias Current		●		4	8		3	7	nA
A_{VOL}	Large Signal Voltage Gain	$V_O = \pm 10V$, $R_L = 50k$	●		100	500		150	750	V/mV
CMRR	Common-Mode Rejection Ratio	$V_{CM} = +13V$, $-14.9V$	●		88	103		91	104	dB
PSRR	Power Supply Rejection Ratio	$V_S = 5V$, $0V$ to $\pm 18V$	●		88	109		91	110	dB
	Maximum Output Voltage Swing	$R_L = 5k$	●	± 11.0	± 13.5		± 11.0	± 13.5		V
I_S	Supply Current per Amplifier		●		19	30		18	28	μA

ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$, $0^\circ C \leq T_A \leq 70^\circ C$, unless noted.

SYMBOL	PARAMETER	CONDITIONS		LT1178AC/1179AC			LT1178C/1179C			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage		●		100	480		130	660	μV
$\Delta V_{OS}/\Delta T$	Input Offset Voltage Drift	(Note 5)	●		0.6	2.8		0.7	4.0	$\mu V/^\circ C$
I_{OS}	Input Offset Current		●		0.06	0.35		0.06	0.35	nA
I_B	Input Bias Current		●		3	6		3	7	nA
A_{VOL}	Large Signal Voltage Gain	$V_O = \pm 10V$, $R_L = 50k$	●		200	800		150	750	V/mV
CMRR	Common-Mode Rejection Ratio	$V_{CM} = 13V$, $-15V$	●		94	104		91	104	dB
PSRR	Power Supply Rejection Ratio	$V_S = 5V$, $0V$ to $\pm 18V$	●		93	110		91	110	dB
	Maximum Output Voltage Swing	$R_L = 5k$	●	± 11.0	± 13.6		± 11.0	± 13.6		V
I_S	Supply Current per Amplifier		●		17	24		18	28	μA

The ● denotes the specifications which apply over the full operating temperature range.

Note 1: Typical parameters are defined as the 60% yield of parameter distributions of individual amplifiers; i.e., out of 100 LT1179s (or 100 LT1178s) typically 240 op amps (or 120) will be better than the indicated specification.

Note 2: This parameter is tested on a sample basis only. All noise parameters are tested with $V_S = \pm 2.5V$, $V_O = 0V$.

Note 3: This parameter is guaranteed by design and is not tested.


Note 4: Power supply rejection ratio is measured at the minimum supply voltage. The op amps actually work at 1.7V supply but with a typical offset skew of $-300\mu V$.

Note 5: This parameter is not 100% tested.


Note 6: During testing at $-40^\circ C$, the 5V power supply turn on time is less than 0.5 seconds.

TYPICAL PERFORMANCE CHARACTERISTICS


**Input Offset Voltage Distribution
N, J, H Package**

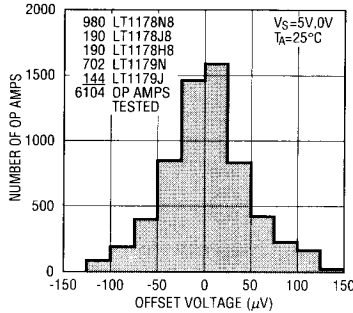


**Input Offset Voltage Distribution
Surface Mount Package**

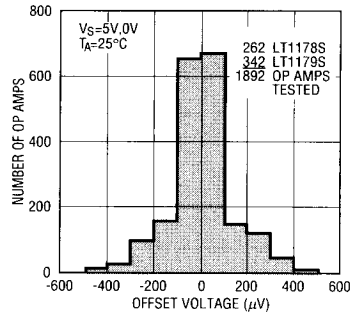


Minimum Supply Voltage

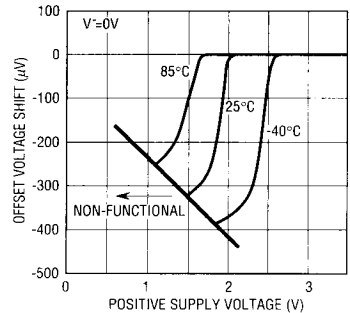


**Input Bias and Offset Currents vs
Temperature**

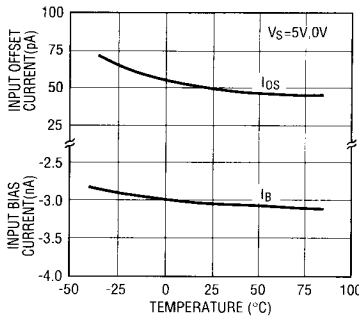


**Output Saturation vs Temperature
vs Sink Current**

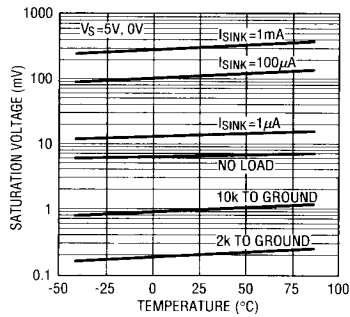


Short Circuit Current

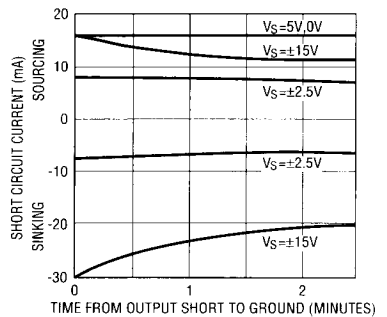


0.1Hz to 10Hz Noise






0.01Hz to 10Hz Noise




Noise Spectrum

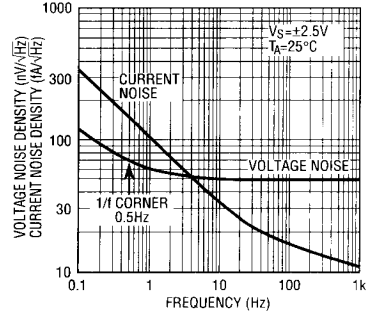


TYPICAL PERFORMANCE CHARACTERISTICS

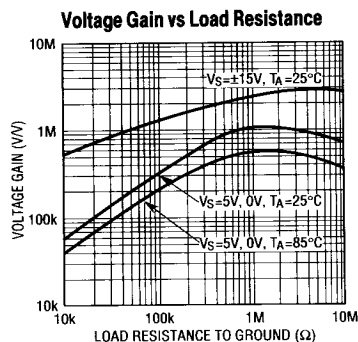


2

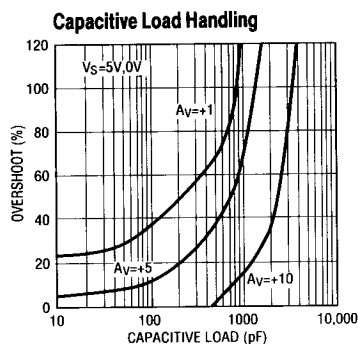


Large Signal Transient Response
 $V_S = \pm 15\text{V}$




Large Signal Transient Response
 $V_S = 5\text{V}, 0\text{V}$




Small Signal Transient Response
 $V_S = \pm 2.5\text{V}$



Small Signal Transient Response
 $V_S = \pm 15\text{V}$




Small Signal Transient Response
 $V_S = 5\text{V}, 0\text{V}$

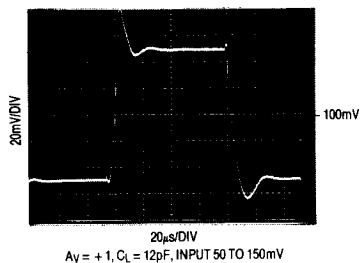


TYPICAL PERFORMANCE CHARACTERISTICS


Common Mode Rejection Ratio vs Frequency



Power Supply Rejection Ratio vs Frequency

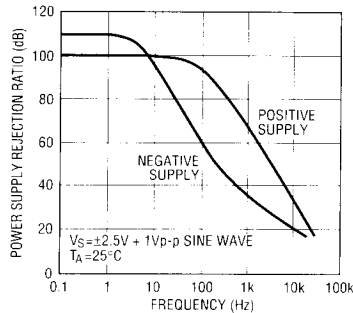


Closed Loop Output Impedance

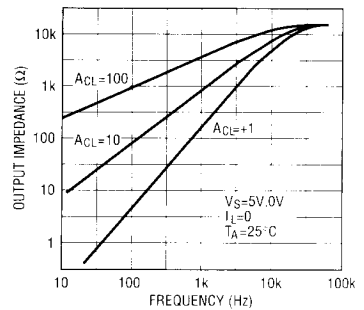

APPLICATIONS INFORMATION

Please see the LT1078/LT1079 data sheet for applications information. All comments relating to specifications, single supply operation and phase reversal protection are directly applicable to the LT1178/LT1179.

Micropower 100Hz to 1MHz V-to-F Converter

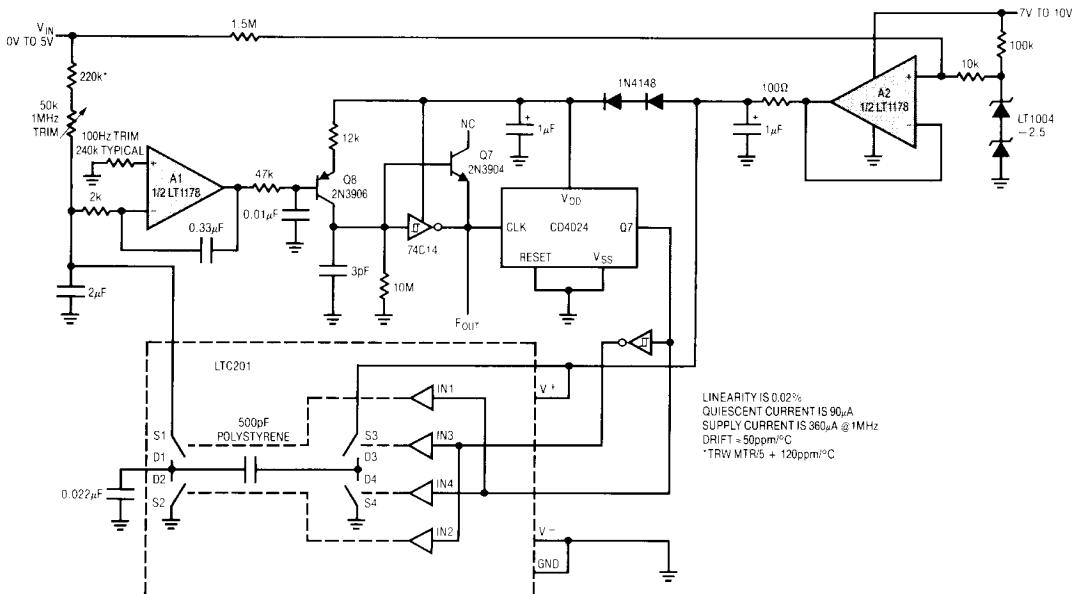

THIS IMAGE DATABASE HAS BEEN CREATED BY CAHNERS
TECHNICAL INFORMATION SERVICE, A DIVISION OF
REED PUBLISHING (USA)., AND IS PROPRIETARY TO
CAHNERS TECHNICAL INFORMATION SERVICE. NO PART
OF THIS DATABASE MAY BE DUPLICATED IN HARD COPY
OR MACHINE READABLE FORM WITHOUT PRIOR WRITTEN
AUTHORIZATION FROM CAHNERS TECHNICAL INFORMATION
SERVICE, EXCEPT THAT LICENSEE IS GRANTED A
LIMITED, NON-EXCLUSIVE LICENSE TO REPRODUCE
LIMITED PORTIONS OF THE DATABASE FOR LICENSEE'S
INTERNAL USE PROVIDED THAT A SUITABLE NOTICE OF
COPYRIGHT IS INCLUDED ON ALL COPIES. UNDER NO
CIRCUMSTANCES MAY COPIES BE MADE FOR RESALE IN
ANY MEDIA.