



T-79-23

LH0021/LH0021C 1.0 Amp Power Operational Amplifier LH0041/LH0041C 0.2 Amp Power Operational Amplifier

General Description

The LH0021/LH0021C and LH0041/LH0041C are general purpose operational amplifiers capable of delivering large output currents not usually associated with conventional IC Op Amps. The LH0021 will provide output currents in excess of one ampere at voltage levels of $\pm 12\text{V}$; the LH0041 delivers currents of 200 mA at voltage levels closely approaching the available power supplies. In addition, both the inputs and outputs are protected against overload. The devices are compensated with a single external capacitor and are free of any unusual oscillation or latch-up problems.

Features

- Output current 1.0 Amp (LH0021)
0.2 Amp (LH0041)
- Output voltage swing $\pm 12\text{V}$ into 10Ω (LH0021)
 $\pm 14\text{V}$ into 100Ω (LH0041)
- Wide full power bandwidth 15 kHz
- Low input offset voltage and current 1mV and 20 nA


- Low standby power 100 mW at $\pm 15\text{V}$
- High slew rate $3.0\text{V}/\mu\text{s}$
- High open loop gain 100 dB

The excellent input characteristics and high output capability of the LH0021 make it an ideal choice for power applications such as DC servos, capstan drivers, deflection yoke drivers, and programmable power supplies.

The LH0041 is particularly suited for applications such as torque driver for inertial guidance systems, dither yoke driver for alpha-numeric CRT displays, cable drivers, and programmable power supplies for automatic test equipment.


The LH0021 is supplied in a 8-pin TO-3 package rated at 20 watts with suitable heatsink. The LH0041 is supplied in both 12-pin TO-8 (2.5 watts with clip on heatsink) and a power 8-pin ceramic DIP (2 watts with suitable heatsink). The LH0021 and LH0041 are guaranteed over the temperature range of -55°C to $+125^\circ\text{C}$ while the LH0021C and LH0041C are guaranteed from -25°C to $+85^\circ\text{C}$.

Schematic and Connection Diagrams

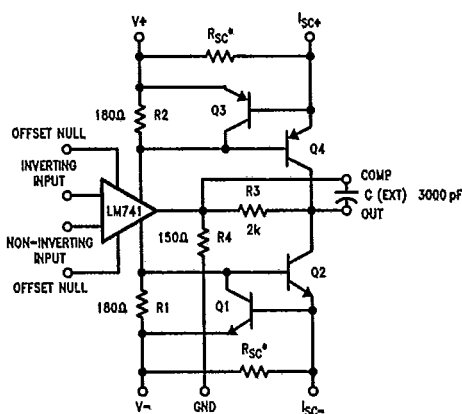

TL/K/10115-1


* R_{sc} external on "G" and "K" packages. R_{sc} internal on "J" package. Offset Null connections available only on "G" package.



TL/K/10115-22

Top View


Order Number LH0041CJ
See NS Package Number HY08A



TL/K/10115-2

Top View

Order Number LH0021K or LH0021CK
See NS Package Number K08A

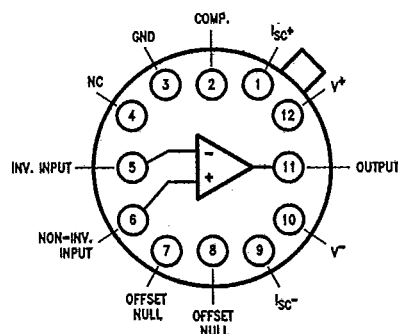

TL/K/10115-3

Order Number LH0041G or LH0041CG
See NS Package Number G12B

T-79-23

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	±18V
Power Dissipation	See curves
Differential Input Voltage	±30V
Input Voltage (Note 1)	±15V
Peak Output Current (Note 2)	
LH0021/LH0021C	2.0 Amps
LH0041/LH0041C	0.5 Amps

Output Short Circuit Duration (Note 3)

Continuous

Operating Temperature Range

-55°C to +125°C

LH0021/LH0041

-25°C to +85°C

LH0021C/LH0041C

Storage Temperature Range

-65°C to +150°C

Lead Temperature (Soldering, 10 sec.)

300°C

DC Electrical Characteristics for LH0021/LH0021C (Note 4)

Parameter	Conditions	Limits						Units
		LH0021			LH0021C			
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	$R_S \leq 100\Omega$, $T_C = 25^\circ\text{C}$ $R_S \leq 100\Omega$		1.0	3.0 5.0		3.0	6.0 7.5	mV mV
Voltage Drift with Temperature	$R_S \leq 100\Omega$		3	25		5	30	$\mu\text{V}/^\circ\text{C}$
Offset Voltage Drift with Time			5			5		$\mu\text{V}/\text{week}$
Offset Voltage Change with Output Power			5	15		5	20	$\mu\text{V}/\text{watt}$
Input Offset Current	$T_C = 25^\circ\text{C}$		30	100 300		50	200 500	nA nA
Offset Current Drift with Temperature			0.1	1.0		0.2	1.0	nA/ $^\circ\text{C}$
Offset Current Drift with Time			2			2		nA/week
Input Bias Current	$T_C = 25^\circ\text{C}$		100	300 1.0		200	500 1.0	nA μA
Input Resistance	$T_C = 25^\circ\text{C}$	0.3	1.0		0.3	1.0		M Ω
Input Capacitance			3			3		pF
Common Mode Rejection Ratio	$R_S \leq 100\Omega$, $\Delta V_{\text{CM}} = \pm 10\text{V}$	70	90		70	90		dB
Input Voltage Range	$V_S = \pm 15\text{V}$	± 12			± 12			V
Power Supply Rejection Ratio	$R_S \leq 100\Omega$, $\Delta V_S = \pm 10\text{V}$	80	96		70	90		dB
Voltage Gain	$V_S = \pm 15\text{V}$, $V_O = \pm 10\text{V}$ $R_L = 1\text{ k}\Omega$, $T_C = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $V_O = \pm 10\text{V}$ $R_L = 100\Omega$	100 25	200		100 20	200		V/mV V/mV
Output Voltage Swing	$V_S = \pm 15\text{V}$, $R_L = 100\Omega$ $V_S = \pm 15\text{V}$, $R_L = 10\Omega$, $T_C = 25^\circ\text{C}$	± 13.5 ± 11.0	± 14 ± 12		± 13 ± 10	± 14 ± 12		V V
Output Short Circuit Current	$V_S = \pm 15\text{V}$, $T_C = 25^\circ\text{C}$, $R_{\text{SC}} = 0.5\Omega$	0.8	1.2	1.6	0.8	1.2	1.6	Amps
Power Supply Current	$V_S = \pm 15\text{V}$, $V_{\text{OUT}} = 0$		2.5	3.5		3.0	4.0	mA
Power Consumption	$V_S = \pm 15\text{V}$, $V_{\text{OUT}} = 0$		75	105		90	120	mW

AC Electrical Characteristics for LH0021/LH0021C ($T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $C_C = 3000\text{ pF}$)

Slew Rate	$A_V = +1$, $R_L = 100\Omega$	0.8	3.0		1.0	3.0		V/ μs
Power Bandwidth	$R_L = 100\Omega$		20			20		kHz
Small Signal Transient Response			0.3	1.0		0.3	1.5	μs
Small Signal Overshoot			5	20		10	30	%
Settling Time (0.1%)	$\Delta V_{IN} = 10\text{V}$, $A_V = +1$		4			4		μs
Overload Recovery Time			3			3		μs
Harmonic Distortion	$f = 1\text{ kHz}$, $P_O = 0.5\text{W}$		0.2			0.2		%
Input Noise Voltage	$R_S = 50\Omega$, B.W. = 10 Hz to 10 kHz		5			5		$\mu\text{V rms}$
Input Noise Current	B.W. = 10 Hz to 10 kHz		0.05			0.05		nA rms

LH0021/LH0021C/LH0041/LH0041C

3

T-79-23

DC Electrical Characteristics for LH0041/LH0041C (Note 4)

Parameter	Conditions	Limits						Units
		LH0041			LH0041C			
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	$R_S \leq 100\Omega$, $T_A = 25^\circ\text{C}$ $R_S \leq 100\Omega$		1.0	3.0 5.0		3.0	6.0 7.5	mV mV
Voltage Drift with Temperature	$R_S \leq 100\Omega$		3			5		$\mu\text{V}/^\circ\text{C}$
Offset Voltage Drift with Time			5			5		$\mu\text{V}/\text{week}$
Offset Voltage Change with Output Power			15			15		$\mu\text{V}/\text{watt}$
Offset Voltage Adjustment Range	(Note 5)		20			20		mV
Input Offset Current	$T_A = 25^\circ\text{C}$		30	100 300		50	200 500	nA nA
Offset Current Drift with Temperature			0.1	1.0		0.2	1.0	nA/ $^\circ\text{C}$
Offset Current Drift with Time			2			2		nA/week
Input Bias Current	$T_A = 25^\circ\text{C}$		100	300 1.0		200	500 1.0	nA μA
Input Resistance	$T_A = 25^\circ\text{C}$	0.3	1.0		0.3	1.0		M Ω
Input Capacitance			3			3		pF
Common Mode Rejection Ratio	$R_S \leq 100\Omega$, $\Delta V_{\text{CM}} = \pm 10\text{V}$	70	90		70	90		dB
Input Voltage Range	$V_S = \pm 15\text{V}$	± 12			± 12			V
Power Supply Rejection Ratio	$R_S \leq 100\Omega$, $\Delta V_S = \pm 10\text{V}$	80	96		70	90		dB
Voltage Gain	$V_S = \pm 15\text{V}$, $V_O = \pm 10\text{V}$ $R_L = 1\text{ k}\Omega$, $T_A = 25^\circ\text{C}$	100	200		100	200		V/mV
	$V_S = \pm 15\text{V}$, $V_O = \pm 10\text{V}$ $R_L = 100\Omega$	25			20			V/mV
Output Voltage Swing	$V_S = \pm 15\text{V}$, $R_L = 100\Omega$	± 13.0	± 14.0		± 13.0	± 14.0		V
Output Short Circuit Current	$V_S = \pm 15\text{V}$, $T_A = 25^\circ\text{C}$ (Note 6)		200	300		200	300	mA
Power Supply Current	$V_S = \pm 15\text{V}$, $V_{\text{OUT}} = 0$		2.5	3.5		3.0	4.0	mA
Power Consumption	$V_S = \pm 15\text{V}$, $V_{\text{OUT}} = 0$		75	105		90	120	mW

AC Electrical Characteristics for LH0041/LH0041C ($T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $C_C = 3000\text{ pF}$)

Slew Rate	$A_V = +1$, $R_L = 100\Omega$	1.5	3.0		1.0	3.0		V/ μs
Power Bandwidth	$R_L = 100\Omega$		20			20		kHz
Small Signal Transient Response			0.3	1.0		0.3	1.5	μs
Small Signal Overshoot			5	20		10	30	%
Settling Time (0.1%)	$\Delta V_{\text{IN}} = 10\text{V}$, $A_V = +1$		4			4		μs
Overload Recovery Time			3			3		μs
Harmonic Distortion	$f = 1\text{ kHz}$, $P_O = 0.5\text{W}$		0.2			0.2		%
Input Noise Voltage	$R_S = 50\Omega$, B.W. = 10 Hz to 10 kHz		5			5		$\mu\text{V}/\text{rms}$
Input Noise Current	B.W. = 10 Hz to 10 kHz		0.05			0.05		nA rms

Note 1: Rating applies for supply voltages above $\pm 15\text{V}$. For supplies less than $\pm 15\text{V}$, rating is equal to supply voltage.

Note 2: Rating applies for LH0041G and LH0021K with $R_{\text{SC}} = 0\Omega$.

Note 3: Rating applies as long as package power rating is not exceeded.

Note 4: Specifications apply for $V_S = \pm 5\text{V}$ to $\pm 18\text{V}$, and $-55^\circ\text{C} \leq T_C \leq +125^\circ\text{C}$ for LH0021K and LH0041G, and $-25^\circ\text{C} \leq T_C \leq +85^\circ\text{C}$ for LH0021CK, LH0041CG and LH0041CJ unless otherwise specified. Typical values are for 25°C only.

Note 5: TO-8 "G" packages only.


Note 6: Rating applies for "J" DIP package and for TO-8 "G" package with $R_{\text{SC}} = 3.3\Omega$.

Typical Performance Characteristics


T-79-23

LH0021/LH0021C/LH0041/LH0041C


Power Derating-LH0021




Safe Operating Area—LH0021




Package Power Dissipation LH0041/LH0041C




Output Voltage Swing




Open Loop Frequency Response




Large Signal Frequency Response




Voltage Follower Pulse Response




No Load Supply Current




Short Circuit Current vs Temperature LH0021/LH0021C




Short Circuit vs Temperature LH0041/LH0041C



Input Bias Current



Voltage Gain



TL/K/10115-4



T-79-23

Input Noise Voltage


Y-axis: MEAN SQUARE NOISE VOLTAGE (V^2/Hz)

X-axis: FREQUENCY (Hz)

The graph shows a decreasing curve on a log-log scale. The y-axis ranges from 10^{-16} to 10^{-15} . The x-axis ranges from 10 to 100k Hz. The curve starts at approximately $4 \times 10^{-16} V^2/\text{Hz}$ at 10 Hz and decreases to approximately $2 \times 10^{-16} V^2/\text{Hz}$ at 100k Hz.



Typical Applications



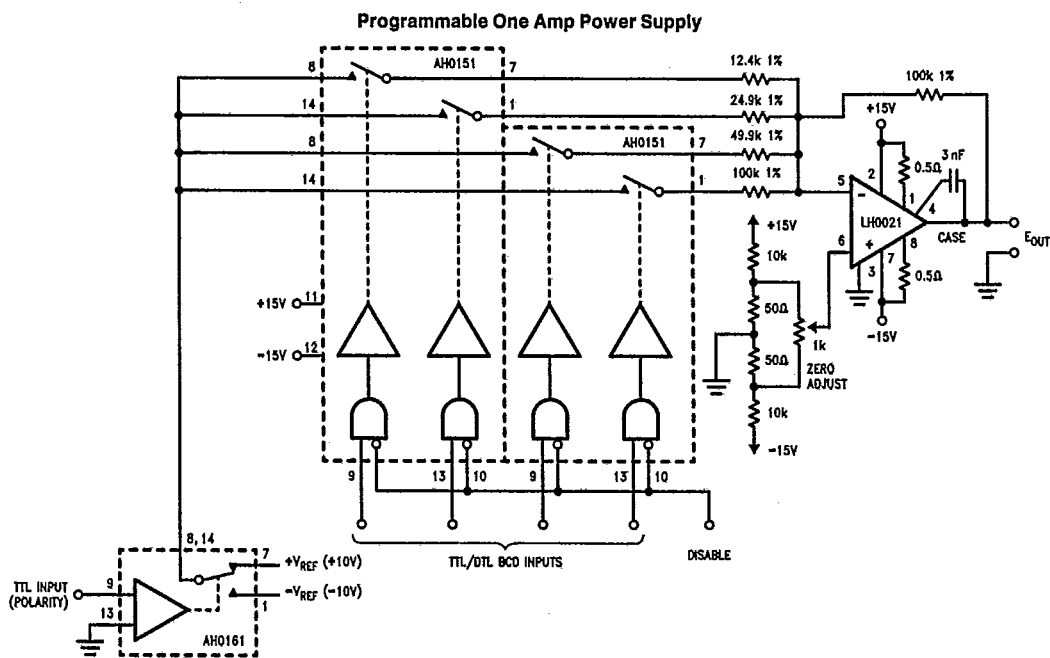


TL/K/10115-8

T-79-23

Typical Applications (Continued)


LH0021/LH0021C/LH0041/LH0041C

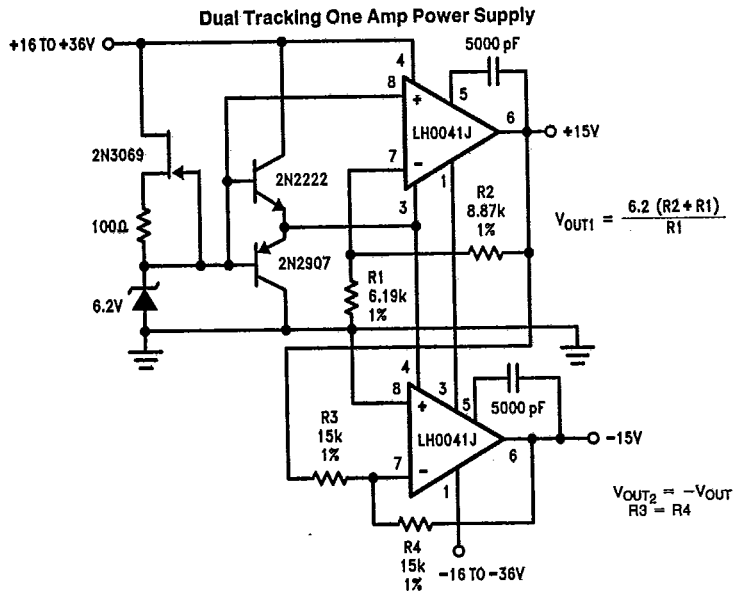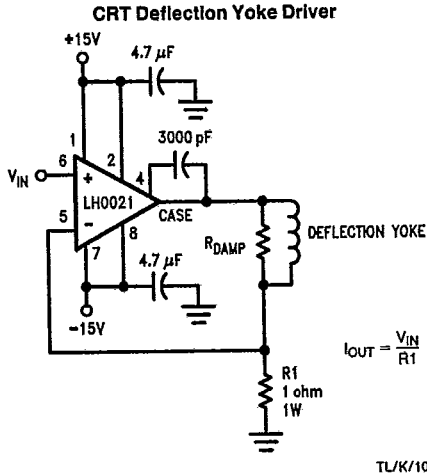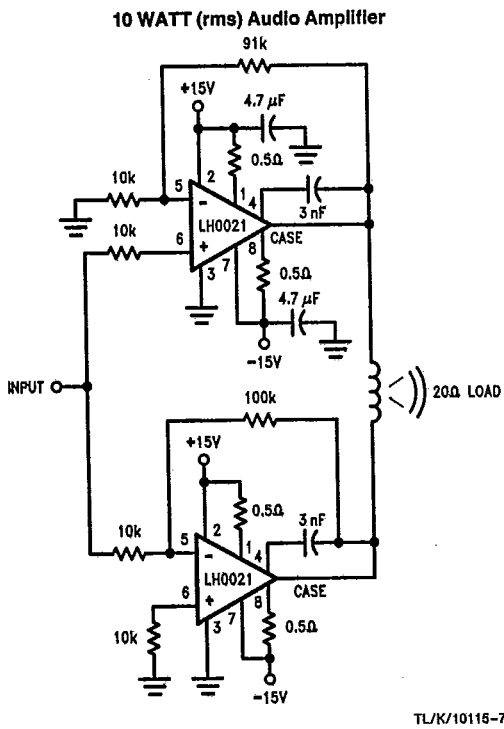

Typical Applications (Continued)


T-79-23

Two Way Intercom

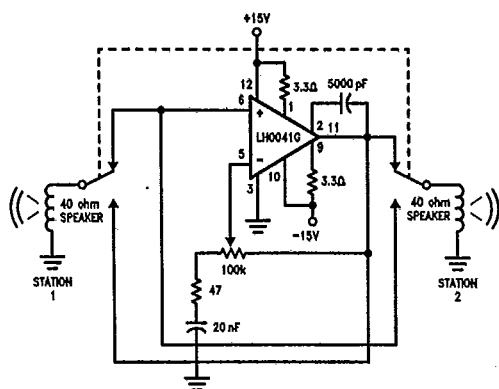


TL/K/10115-10

Programmable High Current Source/Sink

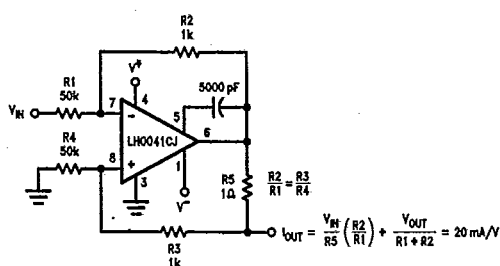


TL/K/10115-11

Power Comparator



TL/K/10115-12


DC Servo Amplifier

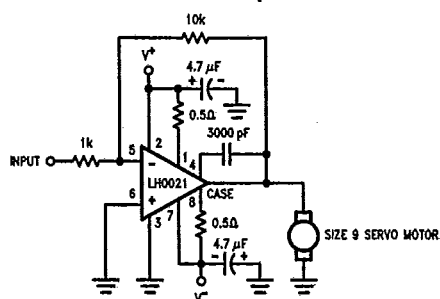

TL/K/10115-13


Auxiliary Circuits

LH0021 Unity Gain Circuit with Short Circuit Limiting




TL/K/10115-14

LH0041G Unity Gain with Short Circuit Limiting



TL/K/10115-15

LH0041/LH0021 Offset Voltage Null Circuit (LH0041CJ Pin Connections Shown)*




TL/K/10115-16

T-79-23


LH0021/LH0021C/LH0041/LH0041C

Auxiliary Circuits (Continued)

LH0041G Offset Voltage Null Circuit*

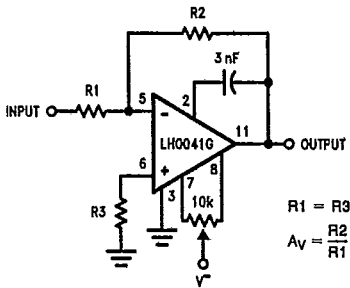


TL/K/10115-17

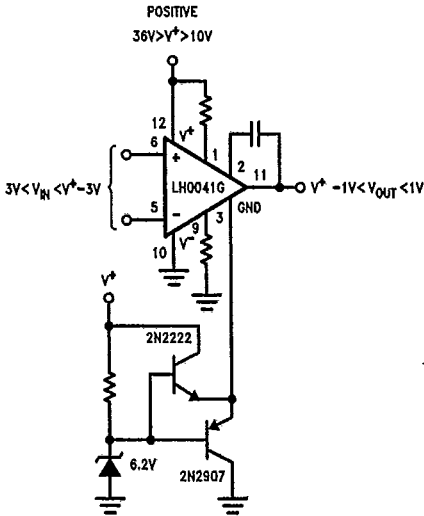


TL/K/10115-18

Operation from Single Supplies

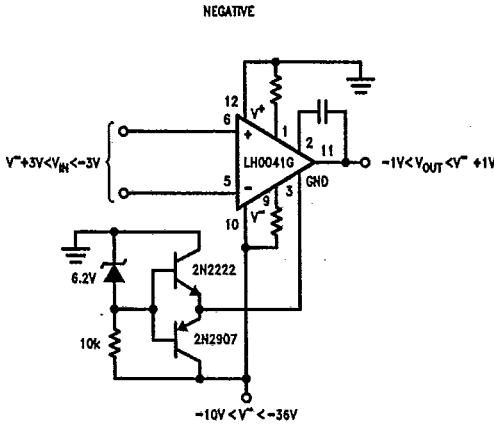


TL/K/10115-19

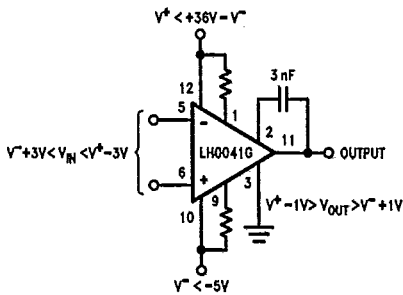

TL/K/10115-20

Operation from Non-Symmetrical Supplies

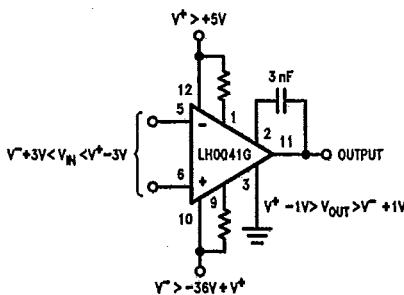

TL/K/10115-21

*For additional offset null circuit techniques see National Linear Applications Handbook.