
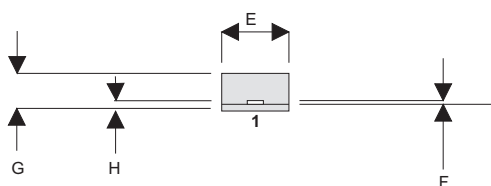


MECHANICAL DATA

GOLD METALLISED MULTI-PURPOSE SILICON DMOS RF FET 10W – 12.5V – 1GHz SINGLE ENDED



DP

PIN 1 SOURCE PIN 2 DRAIN
PIN 3 GATE

DIM	mm	Tol.	Inches	Tol.
A	16.51	0.25	0.650	0.010
B	6.35	0.13	0.250	0.005
C	45°	5°	45°	5°
D	1.52	0.13	0.060	0.005
E	6.35	0.13	0.250	0.005
F	0.13	0.03	0.005	0.001
G	3.56	0.51	0.140	0.020
H	0.64	0.13	0.024	0.005

FEATURES

- SIMPLIFIED AMPLIFIER DESIGN

- SUITABLE FOR BROAD BAND

APPLICATIONS

- LOW C_{rss}

- SIMPLE BIAS CIRCUITS

- LOW NOISE

- HIGH GAIN – 10 dB MINIMUM

APPLICATIONS

- VHF/UHF COMMUNICATIONS
from DC to 1GHz

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

P_D	Power Dissipation	42W
BV_{DSS}	Drain – Source Breakdown Voltage	40V
BV_{GSS}	Gate – Source Breakdown Voltage	$\pm 20V$
$I_{D(sat)}$	Drain Current	8A
T_{stg}	Storage Temperature	-65 to $150^{\circ}C$
T_j	Maximum Operating Junction Temperature	$200^{\circ}C$

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab plc. Telephone +44(0)1455 556565. Fax +44(0)1455 552612.

E-mail: sales@semelab.co.uk Website: <http://www.semelab.co.uk>

Document Number: 3042

Issue: 1

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
BV_{DSS} Drain–Source Breakdown Voltage	$V_{GS} = 0$ $I_D = 10mA$	40			V
I_{DSS} Zero Gate Voltage Drain Current	$V_{DS} = 12.5V$ $V_{GS} = 0$			4	mA
I_{GSS} Gate Leakage Current	$V_{GS} = 20V$ $V_{DS} = 0$			4	μA
$V_{GS(th)}$ Gate Threshold Voltage*	$I_D = 10mA$ $V_{DS} = V_{GS}$	1		7	V
g_{fs} Forward Transconductance*	$V_{DS} = 10V$ $I_D = 0.8A$	0.72			S
G_{PS} Common Source Power Gain	$P_O = 10W$	10			dB
η Drain Efficiency	$V_{DS} = 12.5V$ $I_{DQ} = 0.8A$	40			%
VSWR Load Mismatch Tolerance	$f = 1GHz$	20:1			—
C_{iss} Input Capacitance	$V_{DS} = 0$ $V_{GS} = -5V$ $f = 1MHz$			48	pF
C_{oss} Output Capacitance	$V_{DS} = 12.5V$ $V_{GS} = 0$ $f = 1MHz$			40	pF
C_{rss} Reverse Transfer Capacitance	$V_{DS} = 12.5V$ $V_{GS} = 0$ $f = 1MHz$			4	pF

* Pulse Test: Pulse Duration = 300 μs , Duty Cycle $\leq 2\%$

HAZARDOUS MATERIAL WARNING

The ceramic portion of the device between leads and metal flange is beryllium oxide. Beryllium oxide dust is highly toxic and care must be taken during handling and mounting to avoid damage to this area.

THESE DEVICES MUST NEVER BE THROWN AWAY WITH GENERAL INDUSTRIAL OR DOMESTIC WASTE.

THERMAL DATA

$R_{THj-case}$	Thermal Resistance Junction – Case	Max. 4.2°C / W
----------------	------------------------------------	----------------

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab plc. Telephone +44(0)1455 556565. Fax +44(0)1455 552612.
E-mail: sales@semelab.co.uk Website: <http://www.semelab.co.uk>

Document Number: 3042
Issue: 1