
Esses winbond

128M-BIT 3.0-VOLT PARALLEL FLASH MEMORY WITH PAGE MODE

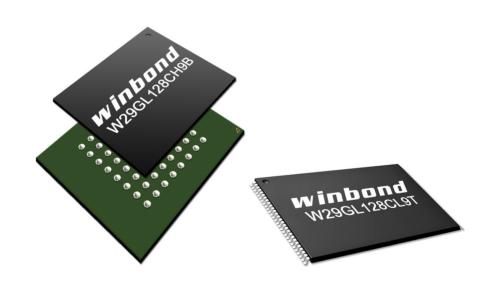

BLANK



Table of Contents

1	GENI	ERAL DESCRIPTION	1
2	FEAT	TURES	1
3	PIN C	CONFIGURATION	2
4	BLO	CK DIAGRAM	3
5	PIN [DESCRIPTION	3
6	ARRA	AY ARCHITECTURE	4
	6.1	Sector Address Table	4
7	FUN	CTIONAL DESCRIPTION	5
	7.1	Device Bus Operation	5
	7.2	Instruction Definitions	
		7.2.1 Reading Array Data	
		7.2.2 Page Mode Read	6
		7.2.3 Device Reset Operation	7
		7.2.4 Standby Mode	7
		7.2.5 Output Disable Mode	7
		7.2.6 Write Operation	7
		7.2.7 Byte/Word Selection	8
		7.2.8 Automatic Programming of the Memory Array	8
		7.2.9 Erasing the Memory Array	g
		7.2.10 Erase Suspend/Resume	10
		7.2.11 Sector Erase Resume	10
		7.2.12 Program Suspend/Resume	11
		7.2.13 Program Resume	11
		7.2.14 Write Buffer Programming Operation	11
		7.2.15 Buffer Write Abort	12
		7.2.16 Accelerated Programming Operation	12
		7.2.17 Automatic Select Bus Operation	12
		7.2.18 Automatic Select Operations	13
		7.2.19 Automatic Select Instruction Sequence	13
		7.2.20 Enhanced Variable IO (EVIO) Control	14
		7.2.21 Hardware Data Protection Options	14
		7.2.22 Inherent Data Protection	
		7.2.23 Power Supply Decoupling	
	7.3	Enhanced Sector Protect/Un-protect	15
		7.3.1 Lock Register	
		7.3.2 Individual (Non-Volatile) Protection Mode	
	7.4	Security Sector Flash Memory Region	
		7.4.1 Factory Locked: Security Sector Programmed and Protected at factory	20
		7.4.2 Customer Lockable: Security Sector Not Programmed or Protected	20
	7.5	Instruction Definition Tables	21
	7.6	Common Flash Memory Interface (CFI) Mode	
		7.6.1 Query Instruction and Common Flash memory Interface (CFI) Mode	
8	ELEC	CTRICAL CHARACTERISTICS ⁽¹⁾	29

i

	8.1	Absolute Maximum Stress Ratings	29
	8.2	Operating Temperature and Voltage	29
	8.3	DC Characteristics	30
	8.4	Switching Test Circuits	31
		8.4.1 Switching Test Waveform	
	8.5	AC Characteristics	32
		8.5.1 Instruction Write Operation	
		8.5.2 Read / Reset Operation	
		8.5.3 Erase/Program Operation	
		8.5.4 Write Operation Status	
		8.5.5 WORD/BYTE CONFIGURATION (#BYTE)	
		8.5.6 DEEP POWER DOWN MODE	
		8.5.7 WRITE BUFFER PROGRAM	
	8.6	Recommended Operating Conditions	
	0.0	8.6.1 At Device Power-up	
	8.7	Erase and Programming Performance	
	8.8	Data Retention	
	8.9	Latch-up Characteristics	
	8.10	Pin Capacitance	
^		(AGE DIMENSIONS	
9			
	9.1	TSOP 56-pin 14x20mm	
40	9.2	Low-Profile Fine-Pitch Ball Grid Array, 64-ball 11x13mm (LFBA64)	
10		ERING INFORMATION	
	10.1	Ordering Part Number Definitions	
	10.2	Valid Part Numbers and Top Side Marking	
11	HIST	ORY	58
		List of Figures	
		List of Figures	
Figure		LFBGA64 TOP VIEW (FACE DOWN)	
Figure		56-PIN STANDARD TSOP (TOP VIEW)	
Figure Figure		Block Diagram Enhanced Sector Protect/Un-protect IPB Program Algorithm	
Figure		Lock Register Program Algorithm	
Figure		IPB Program Algorithm	
Figure		Maximum Negative Overshoot	29
Figure		Maximum Positive Overshoot	
Figure		Switch Test Circuit	
Figure		Switching Test Waveform	
Figure Figure		Instruction Write Operation WaveformRead Timing Waveform	
Figure		#RESET Timing Waveform	
Figure		Automatic Chip Erase Timing Waveform	
Figure		Automatic Chip Erase Algorithm Flowchart	
	e 8-10	Automatic Sector Erase Timing Waveform	38
_	e 8-11	Automatic Sector Erase Algorithm Flowchart	
	e 8-12	Erase Suspend/Resume Flowchart	
	e 8-13	Accelerated Program Timing Waveform	
	e 8-14 e 8-15	Accelerated Program Timing WaveformCE# Controlled Write Timing Waveform	
. iguit	0 10	CEN CONTROLLER VINCE THIRDY VIAVOIDITH	····· 44

	- Windond	
Figure 8-16	Automatic Programming Algorithm Flowchart	
Figure 8-17	Silicon ID Read Timing Waveform	
Figure 8-18	Data# Polling Timing Waveform (During Automatic Algorithms)	
Figure 8-19	Status Polling for Word Programming/Erase	
Figure 8-20	Status Polling for Write Buffer Program Flowchart	
Figure 8-21 Figure 8-22	Toggling Bit Timing Waveform (During Automatic Algorithms) Toggle Bit Algorithm	
Figure 8-23	#BYTE Timing Waveform For Read operations	
Figure 8-24	Page Read Timing Waveform	
Figure 8-25	Deep Power Down mode Waveform	
Figure 8-26	Write Buffer Program Flowchart	
Figure 8-27	AC Timing at Device Power-Up Reference to #RESET	
Figure 9-1	TSOP 56-pin 14x20mm	
Figure 9-2	LFBGA 64-ball 11x13mm	
Figure 10-1	Ordering Part Numbering	 56
	List of Tables	
Table 5-1	Pin Description	 3
Table 6-1	Sector Address	
Table 7-1	Device Bus Operation	 5
Table 7-2	Device Bus Operation (continue)	
Table 7-3	Polling During Embedded Program Operation	
Table 7-4	Polling During Embedded Sector Erase Operation	
Table 7-5	Polling During Embedded Chip Erase Operation	
Table 7-6	Polling During Embedded Erase Suspend	
Table 7-7	Polling During Embedded Program Suspend	
Table 7-8	Polling Buffer Write Abort Flag	
Table 7-9	Auto Select for MFR/Device ID/Secure Silicon/Sector Protect Read	
Table 7-10 Table 7-11	Lock Register Bits Sector Protection Status Table	
Table 7-11	Factory Locked: Security Sector	
Table 7-12	ID Reads, Sector Verify, and Security Sector Entry/Exit	
Table 7-14	Program, Write Buffer, CFI, Erase and Suspend	
Table 7-15	Deep Power Down	
Table 7-16	Lock Register and Global Non-Volatile	
Table 7-17	IPB Functions	
Table 7-18	Volatile DPB Functions	 24
Table 7-19	CFI Mode: ID Data Values	
Table 7-20	CFI Mode: System Interface Data Values	
Table 7-21	CFI Mode: Device Geometry Data Values	
Table 7-22	CFI mode: Primary Vendor-Specific Extended Query Data Values	
Table 8-1	Absolute Maximum Stress Ratings	
Table 8-2	Operating Temperature and Voltage	
Table 8-3	DC Characteristics	
Table 8-4	Test Specification	
Table 8-5	AC CharacteristicsAC Characteristics #RESET and RY/#BY	
Table 8-6 Table 8-7		
Table 8-7	AC Characteristics Word/Byte Configuration (#BYTE)AC Characteristics for Deep Power Down	
Table 8-9	AC Characteristics at Device Power Up	
Table 8-10	AC Characteristics for Erase and Programming Performance	
Table 8-11	Data Retention	
Table 8-12	Latch_un Characteristics	 53

	vinbond see	
Table 8-13	Pin Capacitance	. 53
Table 10-1	Valid Part Numbers and Markings	. 57
Table 11-1	Revision History	



1 GENERAL DESCRIPTION

The W29GL128C Parallel Flash memory provides a storage solution for embedded system applications that require better performance, lower power consumption and higher density. The device has a random access speed of 90ns and a fast page access speed of 25ns, as well as significantly faster program and erase time than the products available on the market today. The W29GL128C also offers special features such as Compatible Manufacturer ID that makes the device industry standard compatible without the need to change firmware.

2 FEATURES

- 64k-Word/128k-Byte uniform sector architecture
 - Total 128 uniform sectors
- 32-Word/64-Byte write buffer
 - Reduces total program time for multiple-word updates
- 8-Word/16-Byte page read buffer
- Secured Silicon Sector area
 - Programmed and locked by the customer or during production
 - 128-word/256-byte sector for permanent, safe identification using an 8-word/16-byte random electronic serial number
- Enhanced Sector Protect using Dynamic and Individual mechanisms
- Polling/Toggling methods are used to detect the status of program and erase operation
- Suspend and resume commands used for program and erase operations
- More than 100,000 erase/program cycles
- More than 20-year data retention
- Software and Hardware write protection
 - Write-Protect all or a portion of memory
 - Enable/Disable protection with #WP pin
 - Top or bottom array protection
- Low power consumption
- Deep power down mode

- Wide temperature range
- Compatible manufacturer ID for drop-in replacement
 - No firmware change is required
- Faster Erase and Program time
 - Erase is 1.5x faster than industry standard
 - Program is 2x faster than industry standard
 - Allows for improved production throughput and faster field updates
- CFI (Common Flash Interface) support
- Single 3V Read/Program/Erase (2.7 3.6V)
- Enhanced Variable IO control
 - All input levels (address, control, and DQ) and output levels are determined by voltage on the Evio input. Evio ranges from 1.65 to Vcc
- #WP/ACC Input
 - Accelerates programming time (when VHH is applied) for greater throughput during system production
 - Protects first or last sector regardless of sector protection settings
- Hardware reset input (#reset) resets device
- Ready/#Busy output (RY/#BY) detects completion of program or erase cycle
- Packages
 - 56-pin TSOP
 - 64-ball LFBGA

Estate winbond

3 PIN CONFIGURATION


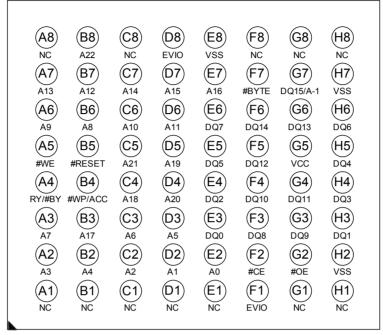


Figure 3-1 LFBGA64 TOP VIEW (FACE DOWN)

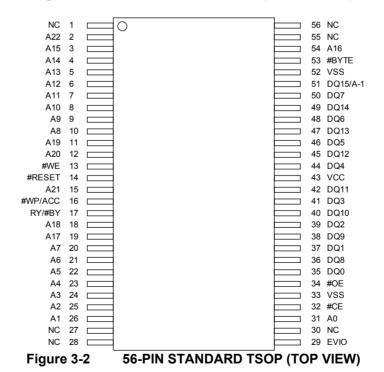

Esses winbond sesses

4 BLOCK DIAGRAM

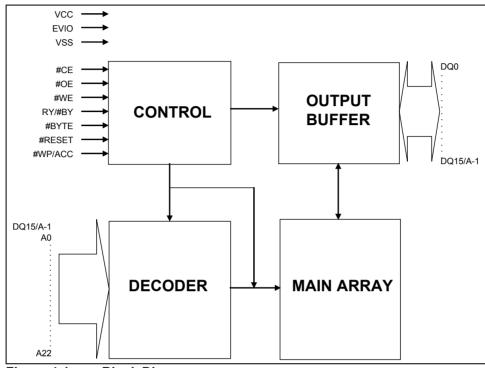


Figure 4-1 Block Diagram

5 PIN DESCRIPTION

SYMBOL		PIN NAME							
A0-A22	Address Inpu	uts							
DQ0-DQ14	Data Inputs/	Pata Inputs/Outputs							
DQ15/A-1	Word mode	Vord mode DQ15 is Data Input/Output							
	Byte mode								
#CE	Chip Enable	Chip Enable							
#OE	Output Enab	Output Enable							
#WE	Write Enable								
#WP/ACC	Hardware W	rite Protect/ Acceleration Pin							
#BYTE	Byte Enable								
#RESET	Hardware Re	eset							
RY/#BY	Ready/Busy	Status							
Vcc	Power Supp	ly							
Evio	Enhanced V	ariable IO Supply							
VSS	Ground	Ground							
NC	No Connecti	on							

Table 5-1 Pin Description



6 ARRAY ARCHITECTURE

6.1 Sector Address Table

Sector	Sector Address A22-A16	Sector Size (KByte/KWord)	X8 Start / Finish					
SA00	0000000	128/64	000000h	01FFFFh	000000h	00FFFFh		
SA01	0000001	128/64	020000h	03FFFFh	010000h	01FFFFh		
•	•	•						
	•	•	-	•	-	•		
-	•	•	-					
SA126	1111110	128/64	FC0000h	FDFFFFh	7E0000h	7EFFFFh		
SA127	1111111	128/64	FE0000h	FFFFFFh	7F0000h	7FFFFFh		

Table 6-1 Sector Address

Note: The address range [A22:A-1] in byte mode (#BYTE = VIL) or [A22:A0] in word mode (#BYTE = VIH)



7 FUNCTIONAL DESCRIPTION

7.1 Device Bus Operation

						D (1/0	#BYTE			
Mode Select	#Reset	#CE	#WE	#OE	Address ⁽⁴⁾	Data I/O DQ[7:0]	VIL	VIH	#WP/ACC	
						D@[1.0]	Data I/O DQ[1	5:8]		
Device Reset	L	Х	Х	Х	Х	High-Z	High-Z	High- Z	L/H	
Standby Mode	Vcc±0.3V	Vcc±0.3V	Х	Х	Х	High-Z	High-Z	High- Z	Н	
Output Disable	Н	L	Н	Н	Х	High-Z	High-Z	High- Z	L/H	
Read Mode	Н	L	Н	L	AIN	DOUT	50144014114	DOUT	L/H	
Write	Н	L	L	Н	AIN	DIN	DQ[14:8]=High-	DIN	Note ^(1,2)	
Accelerated Program	Н	L	L	Н	AIN	DIN	DQ15=A-1	DIN	Vнн	

Table 7-1 Device Bus Operation

Notes:

- 1. The first or last sector was protected if #WP/ACC=VIL.
- 2. When #WP/ACC = VIH, the protection conditions of the outmost sector depends on previous protection conditions. Refer to the enhanced protect feature.
- 3. DQ[15:0] are input (DIN) or output (DOUT) pins according to the requests of instruction sequence, sector protection, or data polling algorithm.
- In Word Mode (Byte#=VIH), the addresses are A22 to A0. In Byte Mode (Byte#=VIL), the addresses are A22 to A-1 (DQ15)...

Description		Con	trol In	puts	A22	A11	A9	A8	A6	A5	А3	A1	Δ0	DQ	DQ[15:8]
		#CE	#WE	#OE	~12	~10	A9	~7	Αb	~4	~2	Αī	ΑU	[7:0]	BYTE	WORD
Read Silicon ID Manufacturer Code		L	Н	L	Х	Х	VHH	Х	L	Х	L	L	L	01	Х	00
Device ID	Cycle 1	L	Н	L	Χ	Х	VHH	X	L	X	Ш	L	Н	7E	Х	22
	Cycle 2	L	Н	L	Χ	Х	VHH	X	L	X	Ι	Н	L	21	Х	22
De	Cycle 3	L	Н	L	Х	Х	VHH	X	Г	Х	Н	Н	Н	01	Х	22
Sector Lock Status Verification ⁽¹⁾		L	Н	L	SA	Х	VHH	Х	L	Х	L	Н	L	01/00	X	Х
Secure Sector (H) (2)		L	Н	L	Х	Х	VHH	Χ	L	Х	L	Н	Н	99/19	Х	Х
Secure S	Sector (L) (2)	L	Н	L	Х	Х	VHH	Χ	L	Χ	L	Н	Н	89/09	Х	Х

Table 7-2 Device Bus Operation (continue)

Notes:

- 1. Sector unprotected code:00h. Sector protected code:01h.
- Factory locked code: #WP protects high address sector: 99h. #WP protects low address sector: 89h. Factory unlocked code: #WP protects high address sector: 19h. #WP protects low address sector: 09h



7.2 Instruction Definitions

The device operation can be initiated by writing specific address and data commands or sequences into the instruction register. The device will be reset to reading array data when writing incorrect address and data values or writing them in the improper sequence.

The addresses will be latched on the falling edge of #WE or #CE, whichever happens later; while the data will be latched on the rising edge of #WE or #CE, whichever happens first. Please refer to timing waveforms.

7.2.1 Reading Array Data

The default state after power up or a reset operation is the Read mode.

To execute a read operation, the chip is enabled by setting #CE and #OE active and #WE high. At the same time, the required address or status register location is provided on the address lines. The system reads the addressed location contents on the Data IO pins after the tCE and tOE timing requirements have been met. Output data will not be accessible on the Data IO pins if either the device or it's outputs are not enabled by #CE or #OE being High, and the outputs will remain in a tristate condition.

When the device completes an embedded memory operation (i.e., Program, automatic Chip Erase or Sector Erase) successfully, it will return to the Read mode and from any address in the memory array the data can be read. However, If the embedded operation fails to complete, by verifying the status register bit DQ5 (exceeds time limit flag) going high during the operations, at this time system should execute a Reset operation causing the device to return to Read mode.

Some operating states require a reset operation to return to Read mode such as:

- Time-out condition during a program or erase failed condition, indicated by the status register bit DQ5 going High during the operation. Failure during either of these states will prevent the device from automatically returning to Read mode.
- During device Auto Select mode or CFI mode, a reset operation is required to terminate their operation.

In the above two situations, the device will not return to the Read mode unless a reset operation is executed (either hardware reset or software reset instruction) or the system will not be able to read array data.

The device will enter Erase-Suspended Read mode if the device receives an Erase Suspend instruction while in the Sector Erase state. The erase operation will pause (after a time delay not exceeding 20µs) prior to entering Erase-Suspend Read mode. At this time data can be programmed or read from any sector that is not being erased. Another way to verify device status is to read the addresses inside the sectors being erased. This will only provide the contents of the status register.

Program operation during Erase-Suspend Read mode of valid sector(s) will automatically return to the Erase-Suspend Read mode upon successful completion of the program operation.

An Erase Resume instruction must be executed to exit the Erase-Suspended Read mode, at which time suspended erase operations will resume. Erase operation will resume where it left off and continue until successful completion unless another Erase Suspend instruction is received.

7.2.2 Page Mode Read

The Page Mode Read has page sizes of 16 bytes or 8 words. The higher addresses A[22:3] accesses the desired page. To access a particular word or byte in a page, it is selected by A[2:0] for word mode and A[2:0,A-1] for byte mode. Page mode can be turned on by keeping "page-read address" constant and changing the "intra-read page" addresses. The page access time is tAA or tCE, followed by tPA for the page read time. When #CE toggles, access time is tAA or tCE.



7.2.3 Device Reset Operation

Pulling the #RESET pin Low for a period equal to or greater than tRP will return the device to Read mode. If the device is performing a program or erase operation, the reset operation will take at most a period of tREADY1 before the device returns to Read mode. The RY/#BY pin will remain Low (Busy Status) until the device returns to Read mode.

Note, the device draws larger current if the #RESET pin is held at voltages greater that GND+0.3V and less than or equal to VIL. When the #RESET pin is held a GND±0.3V, the device only consumes Reset (Icc5) current.

It is recommended to tie the system reset signal to the #RESET pin of the flash memory. This allows the device to be reset with the system and puts it in a state where the system can immediately begin reading boot code from it.

Executing the Reset instruction will reset the device back to the Read mode in the following situations:

- During an erase instruction sequence, before the full instruction set is completed.
- Sector erase time-out period
- Erase failed, while DQ5 is High.
- During program instruction sequence, before the full instruction set is completed, including the erase-suspended program instruction.
- Program failed, while DQ5 is High as well as the erase-suspended program failure.
- Auto-select mode
- CFI mode
- The user must issue a reset instruction to reset the device back to the Read mode when the
 device is in Auto-Select mode or CFI mode, or when there is a program or erase failure (DQ5
 is High).
- When the device is performing a Programming (not program fail) or Erasing (Not erase fail) function, the device will ignore reset commands.

7.2.4 Standby Mode

Standby mode is entered when both #RESET and #CE are driven to Vcc ±300mV (inactive state). At this time output pins are placed in the high impedance state regardless of the state of the #WE or #OE pins and the device will draw minimal standby current (Icc4). If the device is deselected during erase or program operation, the device will draw active current until the operation is completed.

7.2.5 Output Disable Mode

The #OE pin controls the state of the Data IO pins. If #OE is driven High (VIH), all Data IO pins will remain at high impedance and if driven Low, the Data IO pins will drive data (#OE has no affect on the RY/BY# output pin).

7.2.6 Write Operation

To execute a write operation, Chip Enable (#CE) pin is driven Low and the Output Enable (#OE) is pulled high to disable the Data IO pins to a high impedance state. The desired address and data should be present on the appropriate pins. Addresses are latched on the falling edge of either #WE or #CE and Data is latched on the rising edge or either #CE or #WE. To see an example, please refer to timing diagrams in Figure 8-5 and Figure 8-15. If an invalid write instruction, not defined in this datasheet is written to the device, it may put the device in an undefined state.



7.2.7 Byte/Word Selection

To choose between the Byte or Word mode, the #BYTE input pin is used to select how the data is input/output on the Data IO pins and the organization of the array data. If the #BYTE pin is driven High, Word mode will be selected and all 16 Data IO pins will be active. If the #BYTE is pulled Low, Byte mode will be active and only Data IO DQ[7:0] will be active. The remaining Data IO pins (DQ[14:8]) will be in a high impedance state and DQ15 becomes the A-1 address input pin.

7.2.8 Automatic Programming of the Memory Array

To program the memory array in Byte or Word mode, refer to the <u>Instruction Definition Tables</u> for correct cycle defined instructions that include the 2 unlocking instruction cycles, the A0h program cycle instruction and subsequent cycles containing the specified address location and the byte or word desired data content, followed by the start of the embedded algorithm to automatically program the array.

Once the program instruction sequence has been executed, the internal state machine commences execution of the algorithms and timing necessary for programming and cell verification. Included in this operation is generating suitable program pulses, checking cell threshold voltage (V_T) margins, and if any cells do not pass verification or have acceptable margins, repetitive program pulse sequence will be cycled again. The internal process mechanisms will protect cells that do pass margin and verification tests from being over-programmed by prohibiting further program pulses to passing cells as failing cells continue to be run through the internal programming sequence until the pass.

This feature allows the user to only perform the auto-programming sequence once and the device state machine takes care of the program and verification process.

Array bits during programming can only change a bit status of "1" (erase state) to a "0" (programmed state). It is not possible to do the reverse with a programming operation. This can only be done by first performing an erase operation. Keep in mind, the internal write verification only checks and detects errors in cases where a "1" is not successfully programmed to "0".

During the embedded programming algorithm process any commands written to the device will be ignored, except hardware reset or a program suspend instruction. Hardware reset will terminate the program operation after a period of time, not to exceed 10µs. If in the case a Program Suspend was executed, the device will enter the program suspend read mode. When the embedded program algorithm is completed or the program is terminated by a hardware reset, the device will return to Read mode.

The user can check for completion by reading the following bits in the status register, once the embedded program operation has started:

Status	DQ7	DQ6	DQ5	DQ1	RY/#BY ¹
In progress	DQ7#	Toggling	0	0	0
Exceeded time	DQ7#	Toggling	1	N/A	0
limit					

Table 7-3 Polling During Embedded Program Operation
Note:

^{1.} RY/#BY is an open drain output pin and should be connected to VCC through a high value pull-up resistor.



7.2.9 Erasing the Memory Array

Sector Erase and Chip Erase are the two possible types of erase operations executed on the memory array. Sector Erase operation erases one or more selected sectors and this can be simultaneous. Chip Erase operation erases the entire memory array, except for any protected sectors.

7.2.9.1 Sector Erase

The sector erase operation returns all selected sectors in memory to the "1" state, effectively clearing all data. This action requires six instruction cycles to commence the erase operation. The unlock sequence is the first two cycles, followed by the configuration cycle, the fourth and fifth are also "unlock cycles", and the Sector Erase instruction is the sixth cycle. An internal 50µs time-out counter is started once the sector erase instruction sequence has been completed. During this time, additional sector addresses and Sector Erase commands may be issued, thus allowing for multiple sectors to be selected and erased simultaneously. Once the 50µs time-out counter has reached its limit, no additional command instructions will be accepted and the embedded sector erase algorithm will commence.

Note, that the 50µs time-out counter restarts after every sector erase instruction sequence. The device will abort and return to Read mode, if any instruction other than Sector Erase or Erase Suspend is attempted during the time-out period.

Once the embedded sector erase algorithm begins, all instructions except Erase Suspend or Hardware Reset will be ignored. The hardware reset will abort the erase operation and return the device to the Read mode.

The embedded sector erase algorithm status can be verified by the following:

Status	DQ7	DQ6	DQ5	DQ3 ¹	DQ2	RY/#BY ²
Time-out period	0	Toggling	0	0	Toggling	0
In progress	0	Toggling	0	1	Toggling	0
Exceeded time limit	0	Toggling	1	1	Toggling	0

Table 7-4 Polling During Embedded Sector Erase Operation

- 1. The DQ3 status bit is the 50µs time-out indicator. When DQ3=0, the 50µs time-out counter has not yet reached zero and the new Sector Erase instruction maybe issued to specify the address of another sector to be erased. When DQ3=1, the 50µs time-out counter has expired and the Sector Erase operation has already begun. Erase Suspend is the only valid instruction that maybe issued once the embedded erase operation is underway.
- 2. RY/#BY is an open drain output pin and should be connected to VCC through a high value pull-up resistor.
- 3. When an attempt is made to erase only protected sector(s), the erase operation will abort thus preventing any data changes in the protected sector(s). DQ7 will output "0" and DQ6 will toggle briefly (100µs or less) before aborting and returning the device to Read mode. If unprotected sectors are also specified, however, they will be erased normally and the protected sector(s) will remain unchanged.
- 4. DQ2 is a localized indicator showing a specified sector is undergoing erase operation or not. DQ2 toggles when user reads at the addresses where the sectors are actively being erased (in erase mode) or to be erased (in erase suspend mode).



7.2.9.2 Chip Erase

The Chip Erase operation returns all memory locations containing a bit state of "0" to the "1" state, effectively clearing all data. This action requires six instruction cycles to commence the erase operation. The unlock sequence is the first two cycles, followed by the configuration cycle, the fourth and fifth are also "unlock cycles", and the sixth cycle initiates the chip erase operation.

Once the chip erase algorithm begins, no other instruction will be accepted. However, if a hardware reset is executed or the operating voltage is below acceptable levels, the chip erase operation will be terminated and automatically returns to Read mode.

The embedded chip erase algorithm status can be verified by the following:

Status	DQ7	DQ6	DQ5	DQ2	RY/#BY ¹
In progress	0	Toggling	0	Toggling	0
Exceeded time limit	0	Toggling	1	Toggling	0

Table 7-5 Polling During Embedded Chip Erase Operation

7.2.10 Erase Suspend/Resume

If there is a sector erase operation in progress, an Erase Suspend instruction is the only valid instruction that may be issued. Once the Erase Suspend instruction is executed during the 50µs time-out period following a Sector Erase instruction, the time-out period will terminate right away and the device will enter Erase-Suspend Read mode. If an Erase Suspend instruction is executed after the sector erase operation has started, the device will not enter Erase-Suspended Read mode until approximately 20µs (5µs typical) time has elapsed. To determine the device has entered the Erase-Suspend Read mode, use DQ6, DQ7 and RY/#BY status to verify the state of the device.

Once the device has entered Erase-Suspended Read mode, it is possible to read or program any sector(s) except those being erased by the erase operation. Only the contents of the status register is present when attempting to read a sector that has been scheduled to erase or be programmed when in the suspend mode. A resume instruction must be executed and recommend checking DQ6 toggle bit status, before issuing another erase instruction.

The status register bits can be verified to determine the current status of the device:

Status	DQ7	DQ6	DQ5	DQ3	DQ2	DQ1	RY/#BY
Erase suspend read in erase suspended sector	1	No toggle	0	N/A	Toggle	N/A	1
Erase suspend read in non-erase suspended sector	Data	Data	Data	Data	Data	Data	1
Erase suspend program in non-erase suspended sector	DQ7#	Toggle	0	N/A	N/A	N/A	0

Table 7-6 Polling During Embedded Erase Suspend

Instruction sets such as read silicon ID, sector protect verify, program, CFI query and erase resume can also be executed during Erase-Suspend mode, except sector and chip erase.

7.2.11 Sector Erase Resume

Only in the Erase-Suspended Read mode can the Sector Erase Resume instruction be a valid command. Once erase resumes, another Erase Suspend instruction can be executed, but allow a 400µs interval between Erase Resume and the next Erase Suspend instruction.

^{1.} RY/#BY is an open drain pin and should be connected to VCC through a high value pull-up resistor.



7.2.12 Program Suspend/Resume

Once a program operation is in progress, a Program Suspend is the only valid instruction that maybe executed. Verifying if the device has entered the Program-Suspend Read mode after executing the Program-Suspend instruction, can be done by checking the RY/#BY and DQ6. Programming should halt within 15µs maximum (5µs typical).

Any sector(s) can be read except those being program suspended. Trying to read a sector being program suspended is invalid. Before another program operation can be executed, a Resume instruction must be performed and DQ6 toggling bit status has to be verified. Use the status register bits shown in the following table to determine the current state of the device:

Status	DQ7	DQ6	DQ5	DQ3	DQ2	DQ1	RY/#BY
Program suspend read in program suspended sector			Inv	alid			1
Program suspend read in non-program suspended sector	Data	Data	Data	Data	Data	Data	1

Table 7-7 Polling During Embedded Program Suspend

Instruction sets such as read silicon ID, sector protect verify, program, CFI query can also be executed during Program/Erase-Suspend mode.

7.2.13 Program Resume

The program Resume instruction is valid only when the device is in Program-Suspended mode. Once the program resumes, another Program Suspend instruction can be executed. Insure there is at least a 5µs interval between Program Resume and the next Suspend instruction.

7.2.14 Write Buffer Programming Operation

Write Buffer Programming Operation, programs 64bytes or 32words in a two step programming operation. To begin execution of the Write Buffer Programming, start with the first two unlock cycles, the third cycle writes the programming Sector Address destination followed by the Write Buffer Load Instruction (25h). The fourth cycle repeats the Sector Address, while the write data is the number of intended word locations to be written minus one. (Example, if the number of word locations to be written is 9, then the value would be 8h.) The 5th cycle is the first starting address/data set. This will be the first pair to be programmed and consequentially, sets the "write-buffer-page" address. Repeat Cycle 5 format for each additional address/data sets to be written to the buffer. Keep in mind all sets must remain within the write buffer page address range. If not, operation will ABORT.

The "write-buffer-page" is selected by choosing address A[22:5].

The second step will be to program the contents of the write buffer page. This is done with one cycle, containing the sector address that was used in step one and the "Write to Buffer Program Confirm" instruction (29h).

Standard suspend/resume commands can be used during the operation of the write-buffer. Also, once the write buffer programming operation is finished, it'll return to the normal READ mode.

Write buffer programming can be conducted in any sequence. However the CFI functions, autoselect, Secured Silicon sector are not functional when program operation is in progress. Multiple write buffer programming operations on the same write buffer address range without intervention erase is accessible. Any bit in a write buffer address range cannot be programmed from 0 back to 1.



7.2.15 Buffer Write Abort

Write Buffer Programming Sequence will ABORT, if the following condition takes place:

- The word count minus one loaded is bigger than the page buffer size (32) during, "Number of Locations to Program."
- Sector Address written is not the same as the one specified during the Write-Buffer-Load instruction.
- If the Address/Data set is not inside the Write Buffer Page range which was set during cycle 5's first initial write-buffer-page select address/data set.
- No "Program Confirm Instruction" after the assigned number of "data load" cycles.

After Write Buffer Abort, the status register will be DQ1=1, DQ7 = DATA# (last address loaded), DQ6=toggle, DQ5=0. This status represents a Write Buffer Programming Operation was ABORTED. A Write-to-Buffer-Abort Reset instruction sequence has to be written to reset the device back to the read array mode.

DQ1 is the bit for Buffer Write Abort. When DQ1=1, the device will abort from buffer write operation and go back to read status register shown in the following table:

Status	DQ7	DQ6	DQ5	DQ3	DQ2	DQ1	RY/#BY
Buffer Write Busy	DQ7#	Toggle	0	N/A	N/A	0	0
Buffer Write Abort	DQ7#	Toggle	0	N/A	N/A	1	0
Buffer Write Exceeded Time Limit	DQ7#	Toggle	1	N/A	N/A	0	0

Table 7-8 Polling Buffer Write Abort Flag

7.2.16 Accelerated Programming Operation

The device will enter the Accelerated Programming mode by applying high voltage (VHH) to the #WP/ACC pin. Accelerated Programming mode allows the system to skip the normal unlock sequences instruction and program byte/word locations directly. The current drawn from the #WP/ACC pin during accelerated programming is no more that IACC1. Important Note: Do not exceed 10 accelerated programs per sector. (#WP/ACC should not be held at VHH for any other function except for programming or damage to the device may occur.)

7.2.17 Automatic Select Bus Operation

There are basically two methods to access Automatic Selection Operations; Automatic Select Instructions through software commands and High Voltage applied to A9. See Automatic Select Instruction Sequence later on in this section for details of equivalent instruction operations that do not require the use of VHH. The following five bus operations require A9 to be raised to VHH.

7.2.17.1 Sector Lock Status Verification

To verify the protected state of any sector using bus operations, execute a Read Operation with Vhh applied to A9, the sector address present on address pins A[22:12], address pins A6, A3, A2, and A0 held Low, and address pins A1 held High. If DQ0 is Low, the sector is considered not protected, and if DQ0 is High, the sector is considered to be protected.

7.2.17.2 Read Silicon Manufacturer ID Code

Winbond's 29GL family of Parallel Flash memories feature an Industry Standard compatible Manufacturer ID code of 01h. To verify the Silicon Manufacturer ID code, execute a Read Operation with VHH applied to the A9 pin and address pins A6, A3, A2, A1 and A0 are held Low. The ID code can then be read on data bits DQ[7:0].



7.2.17.3 Read Silicon Device ID Code

To verify the Silicon Device ID Codes, execute a Read Operation with VHH applied to the A9 pin and address pins A6, A3, A2, A1, and A0 have several bit combinations to return the Winbond Device ID codes of 7Eh, 21h or 01h, which is shown on the data bits DQ[7:0]. See Table 7-2.

7.2.17.4 Read Indicator Bit DQ7 for Security Sector High and Low Address

To verify that the Security Sector has been factory locked, execute a Read Operation with VhH applied to A9, address pins A6, A3, and A2 are held Low, and address pins A1 and A0 are held High. If the Security Sector has been factory locked, the code 99h(Highest Address Sector) or 89h(Lowest Address Sector) will be shown on the data bits DQ[7:0]. Otherwise, the factory unlocked code of 19h(H)/09(L) will be shown.

7.2.18 Automatic Select Operations

The Automatic Select instruction show in <u>Table 7-13</u> can be executed if the device is in one of the following modes; Read, Program Suspended, Erase-Suspended Read, or CFI. At which time the user can issue (two unlock cycles followed by the Automatic Select instruction 90h) to enter Automatic Select mode. Once in the Automatic Select mode, the user can query the Manufacturer ID, Device ID, Security Sector locked status, or Sector protected status multiple times without executing the unlock cycles and a Automatic Select instruction (90h) again.

Once in Automatic Select mode, executing a Reset instruction (F0h) will return the device back to the valid mode from which it left when the Automatic Select mode was first executed.

Another way previously mentioned to enter Automatic Select mode is to use one of the bus operation shown <u>Table 7-2</u> in Device Bus Operation. Once the high voltage (VHH) is removed from the A9 pin, the device will return back to the valid mode from which it left when the Automatic Select mode was first executed.

7.2.19 Automatic Select Instruction Sequence

Accessing the manufacturer ID, device ID, and verifying whether or not secured silicon is locked and whether or not a sector protected is the purpose of Automatic Select mode. There are four instruction cycles that comprise the Automatic Select mode. The first two cycles are write unlock commands, followed by the Automatic Select instruction (90h). The fourth cycle is a read cycle, and the user may read at any address any number of times without entering another instruction sequence. To exit the Automatic Select mode and back to read array, the Reset instruction is necessary. No other instructions are allowed except the Reset Instruction once Automatic Select mode has been selected. Refer to the following table for more detailed information.

			Address	Data (hex)	Representation
Manuf	acturer ID	Word	X00	01	
Iviariui	acturer 1D	Byte	X00	01	
Device ID	W29GL128C	Word	X01/0E/0F	227E/2221/2201	
Device ID	Device ID W29GL126C		X02/1C/1E	7E/21/01	
		Word	X03	99/19(H)	Factory locked/unlocked
Soon	re Silicon	vvoiu	703	89//09(L)	raciory locked/urilocked
Secui	le Silicon	Duto	X06	99/19(H)	Factory looked/uplooked
		Byte	700	89/09(L)	Factory locked/unlocked
Sector Protect Verify		Word	(Sector address) X02	00/01	Unprotected/protected
		Byte	Sector address) X04	00/01	Unprotected/protected

Table 7-9 Auto Select for MFR/Device ID/Secure Silicon/Sector Protect Read



7.2.20 Enhanced Variable IO (EVIO) Control

The Enhanced Variable IO (EVIO) control allows the host system to set the voltage levels that the device generates and tolerates on all inputs and outputs (address, control, and DQ signals). EVIO range is 1.65 to Vcc.

For example, a Evio of 1.65-3.6 volts allows for I/O at the 1.8 or 3 volt levels, driving and receiving signals to and from other 1.8 or 3 V devices on the same data bus.

7.2.21 Hardware Data Protection Options

Hardware Data Protection is the second of the two main sector protections offered by the W29GL128.

7.2.21.1 #WP/ACC Option

By setting the #WP/ACC pin to VIL, the highest or lowest sector (device specific) is protected from all erase/program operations. If #WP/ACC is set High, the highest and Lowest sector revert back to the previous protected/unprotected state.

Note: The max input load current can increase, if #WP/ACC pin is at VIH when the device is put into standby mode.

7.2.21.2 VCC Write Protect

This device will not accept any write instructions when Vcc is less that Vwpt (VCC Write Protect Threshold). This prevents data from inadvertently being altered during power-up, power-down, a temporary power loss or to the low level of Vcc. If Vcc is lower that Vwpt, the device automatically resets itself and will ignore write cycles until Vcc is greater than Vwpt. Once Vcc rises above Vwpt, insure that the proper signals are on the control pins to avoid unexpected program or erase operations.

7.2.21.3 Write Pulse "Glitch" Protection

Pulses less than 5ns are viewed as glitches for control signals #CE, #WE, and #OE and will not be considered for valid write cycles.

7.2.21.4 Power-up Write Inhibit

The device ignores the first instruction on the rising edge of #WE, if upon powering up the device, #WE and #CE are set at VIL and #OE is set at VIH.

7.2.21.5 Logical Inhibit

A write cycle is ignored when either #CE is at VIH, #WE is at VIH, or #OE is at VIL. A valid write cycle requires both #CE and #WE are at VIL with #OE at VIH.

7.2.22 Inherent Data Protection

The device built-in mechanism will reset to Read mode during power up to avoid accidental erasure or programming.

7.2.22.1 Instruction Completion

Invalid instruction sets will result in the memory returning to read mode. Only upon a successful completion of a valid instruction set will the device begin its erase or program operation.

7.2.22.2 Power-up Sequence

The device is placed in Read mode, during power-up sequence.

7.2.23 Power Supply Decoupling

To reduce noise effects, a 0.1μF capacitor is recommended to be connected between Vcc and GND.



7.3 Enhanced Sector Protect/Un-protect

This device is set from the factory in the Individual Protection mode of the Enhanced Sector Protect scheme. The user can disable or enable the programming or erasing operation to any individual sector or whole chip. The figure below helps describe an overview of these methods.

The device defaults to the Individual mode and all sectors are unprotected when shipped from the factory.

The following flow chart shows the detailed algorithm of Enhanced Sector Protect:

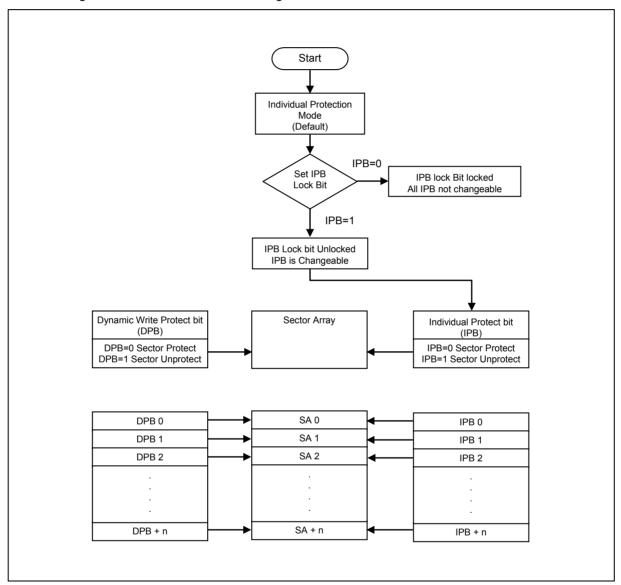


Figure 7-1 Enhanced Sector Protect/Un-protect IPB Program Algorithm



7.3.1 Lock Register

User can choose Secured Silicon Sector Protection Bit for security sector protection method via setting the Lock Register bit, DQ0. Lock Register is a 16-bit one time programmable register. Once programmed DQ0, will be locked in that mode permanently.

Once the Instruction Set Entry instruction sequence for the Lock Register Bits is issued, all sectors read and write functions are disabled until Lock Register Exit sequence has been executed.

The memory sectors and extended memory sector protection is configured using the Lock Register.




Table 7-10 Lock Register Bits

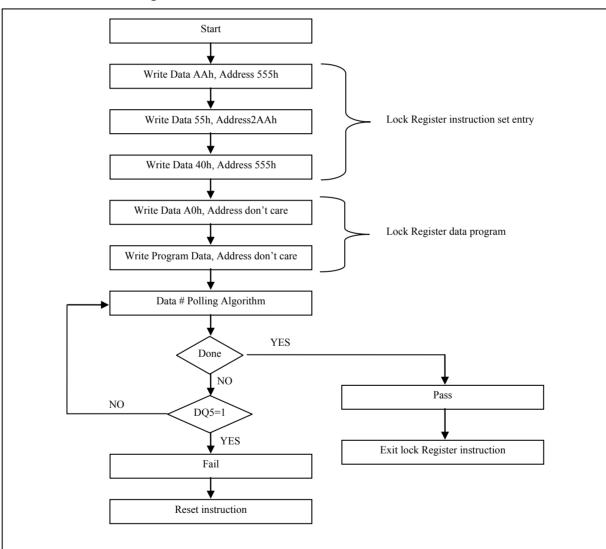


Figure 7-2 Lock Register Program Algorithm



7.3.2 Individual (Non-Volatile) Protection Mode

7.3.2.1 Individual Protection Bits (IPB)

The Individual Protection Bit (IPB) is a nonvolatile bit, one bit per sector, with endurance equal to that of the Flash memory array. Before erasing, IPB preprogramming and verification is managed by the device, so no monitoring is necessary.

The Individual Protection Bits are set sector by sector by the IPB program instruction. Once a IPB is set to "0", the linked sector is protected, blocking any program and/or erase functions on that sector. The IPB cannot be erased individually, but executing the "All IPB Erase" instruction will erase all IPB simultaneously. Read and write functions are disabled when IPB programming is going on for all sectors until this mode exits.

In case one of the protected sectors need to be unprotected, first, the IPB Lock Bit must be set to "1" by performing one of the following: power-cycle the device or perform a hardware reset. Second, an "All IPB Erase instruction needs to be performed. Third, Individual Protection Bits need to be set once again to reflect the desired settings and finally, the IPB Lock Bit needs to be set once again which locks the Individual Protection Bits and the device functions normally once again.

Executing an IPB Read instruction to the device is required to verify the programming state of the IPB for any given sector. Refer to the IPB Program Algorithm flow chart below for details.

Note that

- While IPB Lock Bit is set, Program and/or erase instructions will not be executed and times out without programming and/or erasing the IPB.
- For best protection results, it is recommended to execute the IPB Lock Bit Set instruction early on in the boot code. Also, protect the boot code by holding WP#/ACC = VIL. Note that the IPB and DPB bits perform the same when WP#/ACC = VHH, and when WP#/ACC = VIH.
- While in the IPB command mode, read within that sector will bring the IPB status back for that sector. All Read must be executed by the read mode.
- Issuing the IPB Instruction Set Exit will reset the device to normal read mode enabling reads and writes for the array.

7.3.2.2 Dynamic Protection Bits (DPB)

Dynamic Protection allows the software applications to easily protect sectors against unintentional changes, although, the protection can be readily disabled when changes are needed.

All Dynamic Protection Bits (DPB) are individually linked to their associated sectors and these volatile bits can be modified individually (set or cleared). The DPB provide protection schemes for only unprotected sectors that have their associated IPB cleared. To change a DPB, the "DPB Instruction Set Entry" must be executed first and then either the DPB Set (programmed to "0") or DPB Clear (erased to "1") commands have to be executed. This places each sector in the protected or unprotected state separately. To exit the DPB mode, execute the "DPB Instruction Set Exit" instruction.

Note that

• When the parts are first shipped, the IPB are cleared (erased to "1") and upon power up or reset, the DPB can be set or cleared.

IPB instruction set entry

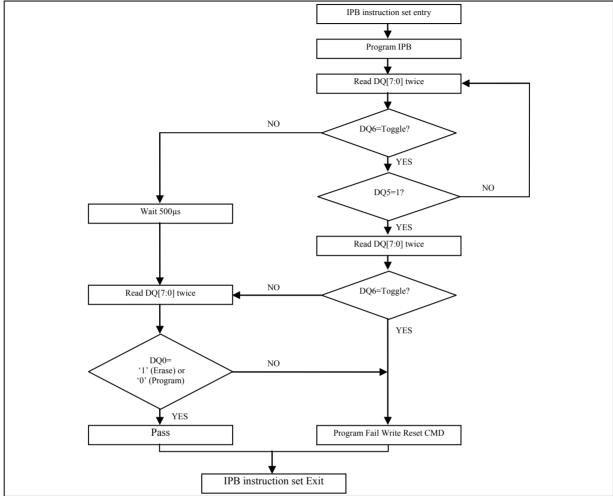


Figure 7-3 IPB Program Algorithm

Note:

1. IPB program/erase status polling flowchart: Check DQ6 toggle, when DQ6 stop toggle, the read status is 00h/01h (00h for program and 01h for erase, otherwise the status is "fail' and "exit".

7.3.2.3 Individual Protection Bit Lock Bit

The Individual Protection Bit Lock Bit (IPBLK) is a global lock bit to control all IPB states. It is a singular volatile bit. If the IPBLK is set ("0"), all IPB are locked and all sectors are protected or unprotected according to their individual IPB. When IPBLK=1 (cleared), all IPB are unlocked and allowed to be set or cleared.

To clear the IPB Lock Bit, a hardware reset or a power-up cycle must be executed.

.

Selection Winbond

Sector	Protection	Status	Santar Status
DPB	IPBLK	IPB	Sector Status
clear	clear	clear	Unprotect, DPB and IPB are changeable
clear	clear	set	Protect, DPB and IPB are changeable
clear	set	clear	Unprotect, DPB is changeable
clear	set	set	Protect, DPB is changeable
set	clear	clear	Protect, DPB and IPB are changeable
set	clear	set	Protect, DPB and IPB are changeable
set	set	clear	Protect, DPB is changeable
set	set	set	Protect, DPB is changeable

Table 7-11 Sector Protection Status Table



7.4 Security Sector Flash Memory Region

An extra memory space length of 128 words is used as the Security Sector Region which can be factory locked or customer lockable. To enquire about the lock status of the device, the customer can issue a Security Sector Protect Verify or Security Sector Factory Protect Verify using Automatic Select Address 03h and DQ7.

The security sector region is unprotected when shipped from factory and the security silicon indicator bit (DQ7) is set to "0" for a customer lockable device. The security sector region is protected when shipped from factory and the security silicon sector indicator bit is set to "1" for a factory-locked device.

7.4.1 Factory Locked: Security Sector Programmed and Protected at factory

In a factory locked device, the Security Sector is permanently locked prior to factory shipment. The ESN occupies addresses 00000h to 0000Fh in byte mode or 00000h to 00007h in word mode since the device has a 16-byte (8-word) ESN(Electronic Serial Number) in the security region.

Security Silicon Sector Address Range	Sector Address Locked		Customer Lockable			
000000h-000007h	ESN	ESN or Determined by Customer	Determined by			
000008h-00007Fh	Inaccessible	Determined by Customer	Customer			

Table 7-12 Factory Locked: Security Sector

7.4.2 Customer Lockable: Security Sector Not Programmed or Protected

Important Notice; Once the security silicon sector is protected (Lock Register OTP DQ0 = "0", Security Sector indicator DQ7 bit="0"), there is no way to unprotect the security silicon sector and the contents of the memory region can no longer be programmed.

Once the security silicon is locked and verified, an Exit Security Sector Region instruction must be executed to get back to the Read Array mode. A power cycle, or a hardware reset will also return the device to read array mode.

This region can act as extra memory space when this security feature is not utilized. It is important to note, the security sector region is a One Time Programmable (OTP) region. You can overwrite a WORD, but you cannot change the state of a programmed cell.



7.5 Instruction Definition Tables

	Instruction			Bus ycle		l Bus ycle		Bus /cle	4th Bu	s Cycle		Bus /cle	6 th Bus Cycle	
			ADD	DATA	ADD	DATA	ADD	DATA	ADD	DATA	ADD	DATA	ADD	DATA
	Read Mode	WORD	Add	Data										
	iteau woue	BYTE	Add	Data										
	Danat Mada	WORD	XXX	F0										
	Reset Mode	BYTE	XXX	F0										
	Silicon ID	WORD	555	AA	2AA	55	555	90	X00	01				
	Silicon iD	BYTE	AAA	AA	555	55	AAA	90	X00	01				
ect	Device ID	WORD	555	AA	2AA	55	555	90	X01	ID1	X0E	ID2	X0F	ID3
Select		BYTE	AAA	AA	555	55	AAA	90	X02	ID1	X1C	ID2	X1E	ID3
Automatic	Factory Protect	WORD	555	AA	2AA	55	555	90	X03	99/19(H) 89/09(L)				
Autor	Verify	BYTE	AAA	AA	555	55	AAA	90	X06	99/19(H) 89/09(L)				
	Sector Protect	WORD	555	AA	2AA	55	555	90	(SA)X02	00/01				
	Verify	BYTE	AAA	AA	555	55	AAA	90	(SA)X04	00/01				
	Security Sector	WORD	555	AA	2AA	55	555	88						
	Region	BYTE	AAA	AA	555	55	AAA	88						
E,	Exit Security Sector	WORD	555	AA	2AA	55	555	90	XXX	00				
= /		BYTE	AAA	AA	555	55	AAA	90	XXX	00				

Table 7-13 ID Reads, Sector Verify, and Security Sector Entry/Exit

Esses winbond sesses

Instruction			Bus /cle		l Bus /cle		Bus /cle		Bus /cle		Bus ycle	6 th Bus Cycle	
		ADD	DATA	ADD	DATA	ADD	DATA	ADD	DATA	ADD	DATA	ADD	DATA
Program	WORD	555	AA	2AA	55	555	A0	Add	Data				
riogiani	BYTE	AAA	AA	555	55	AAA	A0	Add	Data				
Write to Buffer Program	WORD	555	AA	2AA	55	SA	25	SA	N-1	WA	WD	WBL	WD
write to Buffer Program	BYTE	AAA	AA	555	55	SA	25	SA	N-1	WA	WD	WBL	WD
Write to Buffer Program	WORD	555	AA	2AA	55	555	F0						
Abort Reset	BYTE	AAA	AA	555	55	AAA	F0						
Write to Buffer Program	WORD	SA	29										
Confirm	BYTE	SA	29										
Chip Erase	WORD	555	AA	2AA	55	555	80	555	AA	2AA	55	555	10
Chip Erase	BYTE	AAA	AA	555	55	AAA	80	AAA	AA	555	55	AAA	10
Sector Erase	WORD	555	AA	2AA	55	555	80	555	AA	2AA	55	SA	30
Jector Liase	BYTE	AAA	AA	555	55	AAA	80	AAA	AA	555	55	SA	30
CFI Read	WORD	55	98										
OTTROUG	BYTE	AA	98										
Program/Erase Suspend	WORD	XXX	В0										
Program/Erase Suspend	BYTE	XXX	В0										
Program/Erase Resume	WORD	XXX	30										
- 11 - 11	BYTE		30										

Table 7-14 Program, Write Buffer, CFI, Erase and Suspend
Wa=WRITE ADDRESS, WD=WRITE DATA, SA=SECTOR ADDRESS, N-1=WORD COUNT, WBL=WRITEBUFFER LOCATION, ID1/ID2/ID3: REFER TO Table 7-2 FOR DETAIL ID.

	Instruction			1st Bus Cycle		2nd Bus Cycle		ıs Cycle	4th Bu	ıs Cycle	5th Bus Cycle	
	instruction		ADD	DATA	ADD	DATA	ADD	DATA	ADD	DATA	ADD	DATA
ver	W C ENIER	WORD	555	AA	2AA	55	XXX	В9				
% ⊗		BYTE	AAA	AA	555	55	XXX	В9				
dee	EXIT	WORD	XXX	AB								
۵		BYTE	XXX	AB								

Table 7-15 Deep Power Down

Selection Winbond

	In admiration		1st Bu	ıs Cycle	2nd Bu	us Cycle	3rd Bu	ıs Cycle	4th Bu	ıs Cycle	5th Bu	ıs Cycle
	Instruction		ADD	DATA								
	Lock Register Instruction Set	WORD	555	AA	2AA	55	555	40				
_	Entry	BYTE	AAA	AA	555	55	AAA	40				
iste	D	WORD	XXX	A0	XXX	DATA						
Reg	Program	BYTE	XXX	A0	XXX	DATA						
Lock Register	Read	WORD	XXX	DATA								
۲		BYTE	XXX	DATA								
	Lock Register Instruction Exit	WORD	XXX	90	XXX	00						
		BYTE	XXX	90	XXX	00						
	IPB Instruction Set	WORD	555	AA	2AA	55	555	C0				
tile	Entry	BYTE	AAA	AA	555	55	AAA	C0				
ola	IPB Program	WORD	XXX	A0	SA	00						
\- \-	IPB Program	BYTE	XXX	A0	SA	00						
Global Non-Volatile	All IPB Erase	WORD	XXX	80	00	30						
	All IFD Elase	BYTE	XXX	80	00	30						
35	IPB Status Read	WORD	SA	00/01								
	IPB Status Read		SA	00/01								

Table 7-16 Lock Register and Global Non-Volatile

	Instruction		1st Bu	1st Bus Cycle		ıs Cycle	3rd Bu	ıs Cycle	4th Bu	ıs Cycle	5th Bu	s Cycle
	instruction		ADD	DATA	ADD	DATA	ADD	DATA	ADD	DATA	ADD	DATA
	IPB Instruction Set	WORD	XXX	90	xxx	00						
	Exit	BYTE	xxx	90	xxx	00						
-	IPB Instruction Set Entry	WORD	555	AA	2AA	55	555	50				
Freeze		BYTE	AAA	AA	555	55	AAA	50				
	IPB Lock Set	WORD	XXX	A0	XXX	00						
Volatile	IPB LOCK Set	BYTE	XXX	A0	XXX	00						
bal	IPB Lock Status	WORD	XXX	00/01								
	Read	BYTE	XXX	00/01		·						
	IPB Lock Instruction Set Exit	WORD	XXX	90	XXX	00						
		BYTE	XXX	90	XXX	00						

Table 7-17 IPB Functions

Esses winbond

	Instruction		1st Bu	ıs Cycle	2nd Bu	ıs Cycle	3rd Bu	ıs Cycle	4th Bu	ıs Cycle	5th Bu	is Cycle
	msuuction		ADD	DATA								
	DPB Instruction Set Entry	WORD	555	AA	2AA	55	555	E0				
		BYTE	AAA	AA	555	55	AAA	E0				
	DPB Set	WORD	XXX	A0	SA	00						
_	DPB 3et	BYTE	XXX	A0	SA	00						
Volatile	DPB Clear	WORD	XXX	A0	SA	01						
Vol		BYTE	XXX	A0	SA	01						
		WORD	SA	00/01								
	DPB Status READ	BYTE	SA	00/01								
	DPB Instruction Set	WORD	XXX	90	XXX	00						·
	Exit	BYTE	XXX	90	XXX	00						

Table 7-18 Volatile DPB Functions

Notes:

- It is not recommended to use any other code that is not in the instruction definition table which can potentially enter the hidden mode.
- 2. For the IPB Lock and DPB Status Read "00" represents lock (protect), "01" represents unlock (unprotect).



7.6 Common Flash Memory Interface (CFI) Mode

7.6.1 Query Instruction and Common Flash memory Interface (CFI) Mode

Through Common Flash Interface(CFI) operations it is possible to access the operating characteristics, structure and vendor specific information, such as identifying information, memory size, byte/word configuration, operating voltages and timing information of this device. From the Read array mode writing CFI Read instruction 98h to the address "55h"/"AAh" (Word/Byte, respectively), the device will gain access to the CFI Query Mode. Once in the CFI mode data can be read using the addresses given in Table 7-19 thru 7-22.

A reset instruction must be executed to exit CFI mode and the device will return to read array mode.

CFI mode: Identification Data Values (All Values in these tables are hexadecimal)

Description	Address (Word Mode)	Data	Address (Byte Mode)
	10h	0051h	20h
Query-unique ASII string "QRY"	11h	0052h	22h
	12h	0059h	24h
Primary vendor instruction set and control interface ID code	13h	0002h	26h
Filmary veridor instruction set and control interface in code	14h	0000h	28h
Address for primary algorithm extended query table	15h	0040h	2Ah
Address for primary algorithm extended query table	16h	0000h	2Ch
Alternate vendor instruction set and control interface ID code	17h	0000h	2Eh
Alternate vendor instruction set and control interface in code	18h	0000h	30h
Address for alternate algorithm extended query table	19h	0000h	32h
Address for alternate algorithm extended query table	1Ah	0000h	34h

Table 7-19 CFI Mode: ID Data Values

Esses winbond

CFI mode: System Interface Data Values

Description	Address (Word Mode)	Data	Address (Byte Mode)
Vcc supply minimum program/erase voltage	1Bh	0027h	36h
Vcc supply maximum program/erase voltage	1Ch	0036h	38h
VPP supply minimum program/erase voltage	1Dh	0000h	3Ah
VPP supply maximum program/erase voltage	1Eh	0000h	3Ch
Typical timeout per single word/byte write, 2 ⁿ µs	1Fh	0003h	3Eh
Typical timeout for maximum-size buffer write, 2 ⁿ μs (00h, not support)	20h	0004h	40h
Typical timeout per individual block erase, 2 ⁿ ms	21h	0009h	42h
Typical timeout for full chip erase, 2 ⁿ ms (00h, not support)	22h	0010h	44h
Maximum timeout for word/byte write, 2 ⁿ times typical	23h	0003h	46h
Maximum timeout for buffer write, 2 ⁿ times typical	24h	0005h	48h
Maximum timeout per individual block erase, 2 ⁿ times typical	25h	0003h	4Ah
Maximum timeout for chip erase, 2 ⁿ times typical (00h, not support)	26h	0002h	4Ch

Table 7-20 CFI Mode: System Interface Data Values



CFI mode: Device Geometry Data Values

Description	Address (Word Mode)	Data	Address (Byte Mode)
Device size = 2 ⁿ in number of bytes	27h	0018h	4Eh
Flash device interface description (02=asynchronous	28h	0002h	50h
x8/x16)	29h	0000h	52h
Maximum number of bytes in buffer write = 2 ⁿ (00h, not	2Ah	0006h	54h
support)	2Bh	0000h	56h
Number of erase regions within device (01h:uniform, 02h:boot)	2Ch	0001h	58h
Index for Erase Bank Area 1:	2Dh	007Fh	5Ah
[2E,2D] = # of same-size sectors in region 1-1	2Eh	0000h	5Ch
[30, 2F] = sector size in multiples of 256K-bytes	2Fh	0000h	5Eh
	30h	0002h	60h
Index for Erase Bank Area 2	31h	0000h	62h
	32h	0000h	64h
	33h	0000h	66h
	34h	0000h	68h
Index for Erase Bank Area 3	35h	0000h	6Ah
	36h	0000h	6Ch
	37h	0000h	6Eh
	38h	0000h	70h
Index for Erase Bank Area 4	39h	0000h	72h
	3Ah	0000h	74h
	3Bh	0000h	76h
	3Ch	0000h	78h

Table 7-21 CFI Mode: Device Geometry Data Values



CFI mode: Primary Vendor-Specific Extended Query Data Values

Description	Address (Word Mode)	Data	Address (Byte Mode)
	40h	0050h	80h
Query - Primary extended table, unique ASCII string, PRI	41h	0052h	82h
	42h	0049h	84h
Major version number, ASCII	43h	0031h	86h
Minor version number, ASCII	44h	0033h	88h
Unlock recognizes address (0= recognize, 1= don't recognize)	45h	000Ch	8Ah
Erase suspend (2= to both read and program)	46h	0002h	8Ch
Sector protect (N= # of sectors/group)	47h	0001h	8Eh
Temporary sector unprotect (1=supported)	48h	0000h	90h
Sector protect/Chip unprotect scheme	49h	0008h	92h
Simultaneous R/W operation (0=not supported)	4Ah	0000h	94h
Burst mode (0=not supported)	4Bh	0000h	96h
Page mode (0=not supported, 01 = 4 word page, 02 = 8 word page)	4Ch	0002h	98h
Minimum ACC(acceleration) supply (0= not supported), [D7:D4] for volt, [D3:D0] for 100mV	4Dh	0095h	9Ah
Maximum ACC(acceleration) supply (0= not supported), [D7:D4] for volt, [D3:D0] for 100mV	4Eh	00A5h	9Ch
WP# Protection 04=Uniform sectors bottom WP# protect 05=Uniform sectors top WP# protect	4Fh	00xxh	9Eh
Program Suspend (0=not supported, 1=supported)	50h	0001h	A0h

Table 7-22 CFI mode: Primary Vendor-Specific Extended Query Data Values



8 ELECTRICAL CHARACTERISTICS⁽¹⁾

8.1 Absolute Maximum Stress Ratings

Surrounding Temperature with Bias	-65°C to +125°C
Storage Temperature	-65°C to +150°C
Vcc Voltage Range	-0.5V to +4.0V
Evio Voltage Range	-0.5V to +4.0V
A9, #WP/ACC Voltage Range	-0.5V to +10.5V
Other Pins Voltage Range	-0.5V to Vcc +0.5V
Output Short Circuit Current (less than one second)	200 mA

Table 8-1 Absolute Maximum Stress Ratings


8.2 Operating Temperature and Voltage

Industrial (I) Grade Surrounding Temperature (TA)	-40°C to +85°C
Full Vcc Range Supply Voltage	+2.7V to 3.6V
Regulated Vcc Range Supply Voltage	+3.0V to 3.6V
Evio Range Supply Voltage	1.65V to Vcc

Table 8-2 Operating Temperature and Voltage

NOTE:

- 1. Specification for the W29GL128C is preliminary. See preliminary designation at the end of this document.
- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the
 device. This is stress rating only and functional operational sections of this specification is not implied. Exposure to
 absolute maximum rating conditions for extended period may affect reliability.
- 3. Specifications contained within the following tables are subject to change.
- 4. During voltage transitions, all pins may overshoot Vss to -2.0V and Vcc to +2.0V for periods up to 20ns, see below Figure.

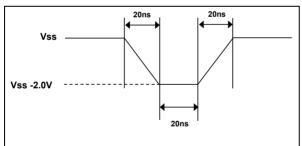

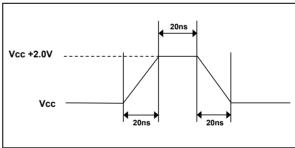


Figure 8-1 Maximum Negative Overshoot Figure 8-2 Maximum Positive Overshoot

Esses winbond

8.3 DC Characteristics

DESCRIPTION	SYMBOL	Conditions	MIN	TYP.	MAX	Unit
		Others			±2.0	μA
Input Leak	lli	WP#/ACC			±5.0	μA
A9 Leak	ILIT	A9=10.5V			35	μA
Output Leak	llo				±1.0	μA
		#CE=VIL, #OE=VIH, VCC=VCCmax:f=1MHz		6	20	mA
Read Current	Icc1	#CE=VIL, #OE=VIH, VCC=VCCmax:f=5MHz		20	30	mA
		#CE=VIL, #OE=VIH, Vcc=Vccmax:f=10MHz		45	55	mA
Vcc Page Read Current	Icc2	#CE=VIL, #OE=VIH, VCC=VCCmax:f=10MHz		7	15	mA
	1002	#CE=VIL, #OE=VIH, VCC=VCCmax:f=33MHz		15	25	mA
EVIO Non-active Current	lio			0.2	10	mA
Write Current	Icc3	#CE=VIL, #OE=VIH, VCC=VCCmax		20	30	mA
Standby Current	Icc4	#CE, #RESET=VCC ±0.3V, #OE=VIH, Vcc=Vccmax, VIL=Vss + 0.3V/-0.1V		10	30	μΑ
Reset Current	Icc5	Vcc=Vccmax, #RESET enabled, other pins disabled		10	30	μA
Sleep Mode Current	Icc6	VCC=VCCmax, VIH=VCC ±0.3, VIL=VSS +(0.3v/-0.1v), #WP/ACC=VIH		10	30	μΑ
Vcc deep power down current	IDPD			1	5	μΑ
Accelerated Pgm Current, WP#/ACC, pin(Word/Byte)	IACC1	#CE=VIL, #OE=VIH		10	20	mA
Accelerated Pgm Current, Vcc pin, (Word/Byte)	IACC2	#CE=VIL, #OE=VIH		20	30	mA
Input Low Voltage	VIL		-0.1		0.3xEvio	V
Input High Voltage	Vih		0.7xEvio		Evio+0.3	V
Very High Voltage for Auto Select/ Accelerated Program	Vнн		9.5		10.5	
Output Low Voltage	Vol	IoL=100μA			0.45	V
Output High Voltage	Voн	Ιοн=-100μΑ	0.85xE∨io			V
VCC Write Protect Threshold	VWPT		2.3		2.5	٧

Table 8-3 DC Characteristics

Note:

^{1.} Sleep mode enable the lower power when address remain stable for tAA+30ns



8.4 Switching Test Circuits

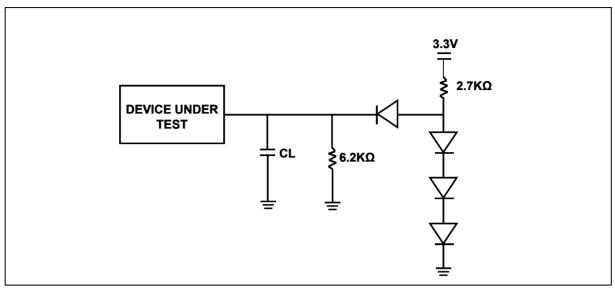


Figure 8-3 Switch Test Circuit

Test Condition	All Speeds	Unit
Output Load	1TTL gate	
Output Load Capacitance	30	pF
Rise/Fall Times	5	ns
Input Pulse levels	0.0 - Evio	V
Input timing measurement reference level (If EVIO <vcc, 0.5="" evio)<="" is="" level="" reference="" td="" the=""><td>0.5EVIO</td><td>٧</td></vcc,>	0.5EVIO	٧
Output timing measurement reference levels	0.5Evio	V

Table 8-4 Test Specification

8.4.1 Switching Test Waveform

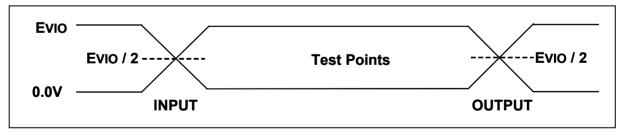


Figure 8-4 Switching Test Waveform

W29GL128C



8.5 AC Characteristics

Description		Symbol		Vcc=2.7V~3		.7V~3.0	6V
Description		ALT	STD	Min	Тур	Max	Units
Valid Data Output after Address	Evio=Vcc	tacc	taa			90	ns
Valid Data Output after Address	EVIO=1.65V to VCC	IACC	LAA			100	ns
Dago Access Time	Evio=Vcc	tn.cc	ŧ D ∧			25	ns
Page Access Time	EVIO=1.65V to VCC	tPACC	tPA			35	ns
Valid data output offer #CE law	Evio=Vcc		tce			90	ns
Valid data output after #CE low	Evio=1.65V to Vcc					100	ns
Valid data output after #OF law	Evio=Vcc		toe			25	ns
Valid data output after #OE low	Evio=1.65V to Vcc					35	ns
Read Period Time	Evio=Vcc		trc	90			ns
Read Period Time	Evio=1.65V to Vcc			100			ns
Data Output High Impedance after	#OE high		tDF			20	ns
Data Output High Impedance after	#CE high		tDF			20	ns
Output Hold Time from the earliest	rising edge of		tou	0			ns
address, #CE, #OE			ton	U			
Write Period Time			twc	90			ns
Command write period time			tcwc	90			ns
Address Setup Time			tas	0			ns
Address Setup Time to #OE low du	ring Toggle Bit		44.00	4.5			ns
Polling	0 00		taso	15			
Address Hold Time			tah	45			ns
Address Hold Time from #CE or #C	E High during		4	0			ns
Toggle Bit Polling			taht	0			
Data Setup Time			tDS	30			ns
Data Hold Time			tDH	0			ns
Vcc Setup Time			tvcs	35			μs
Chip enable Setup Time			tcs	0			ns
Chip enable Hold Time			tсн	0			ns
Output enable Setup Time			toes	0			ns
	Read		toeh	0			ns
Output enable Hold Time	Toggle & Data# Polling			10			ns
#WE Setup Time	J		tws	0			ns
#WE Hold Time			twH	0			ns
#CE Pulse Width		tcp	tCEPW	35			ns
#CE Pulse With High		tcph	tCEPWH	30			ns
#WE Pulse Width			twp	35			ns
#WE Pulse Width High			twph	30			ns
Program/Erase active time by	Evio=Vcc					90	ns
RY/#BY	EVIO=1.65V to VCC	1	tBUSY			100	ns
Read Recover Time before Write (#			4	_			ns
Low)			tghwl	0			-
Read Recover Time before Write (#OE High to #CE			401	_			ns
Low)			tGHEL	0			
32-Word Write Buffer Program Operation			twnwH1		192		μs
Effective Write Buffer Program Operation	Word		twnwH1		6		μs
Accelerated Effective Write Buffer Operation	Per Word		twnwH1		4.8		μs

winbond - - -

Description		Symbol		Vcc=2.7V~3.6V				
		ALT	STD	Min	Тур	Max	Units	
Program Operation	Byte			twnwH1		6	200	μs
Program Operation	Word			twnwH1		6	200	μs
ACC 32-Word Program Operation	n			twnwH1		154		μs
Sector Erase Operation				twnwh2		0.3	2	Sec
Sector Erase Timeout				tsea			50	μs
Release from Deep Power Dowr	n mode			trdp	100		200	μs

Table 8-5 AC Characteristics

8.5.1 Instruction Write Operation

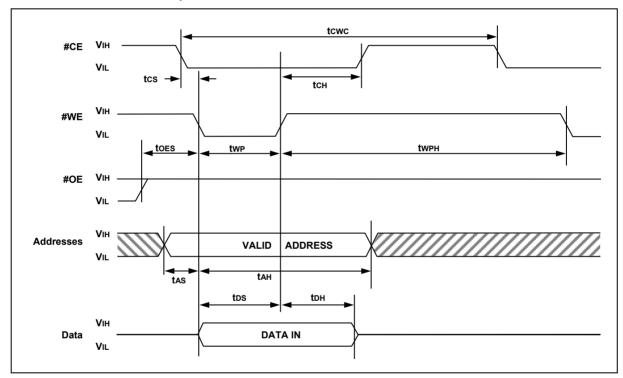


Figure 8-5 Instruction Write Operation Waveform



8.5.2 Read / Reset Operation

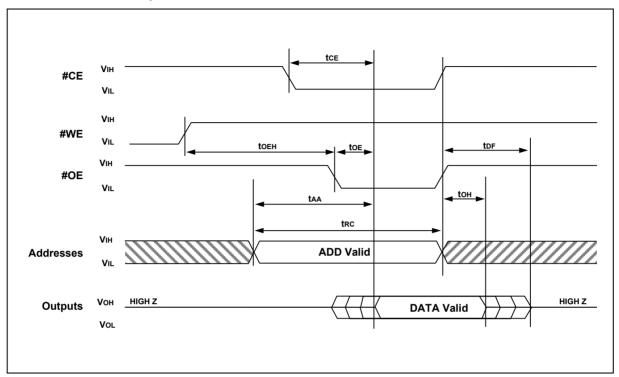


Figure 8-6 Read Timing Waveform

8.5.2.1 AC Characteristics

0.0.2.1 7.0 0.10.1000					
Description		Symbol		Speed	Unit
		STD	Setup	Speeu	Oilit
#RESET Pulse Width (During Automatic Algorithm)	trp	tRP1	MIN	10	μs
#RESET Pulse Width (NOT During Automatic Algorithm)	trp	tRP2	MIN	500	ns
#RESET High Time Before Read		trh	MIN	200	ns
RY/#BY Recovery Time (to #CE, #OE goes low)	trb	tr _B 1	MIN	0	ns
RY/#BY Recovery Time (to #WE goes low)	trb	trB2	MIN	50	ns
#RESET Low (During Automatic Algorithm) to Read or Write	tREADY	tREADY1	MAX	20	μs
#RESET Low (Not During Automatic Algorithm) to Read or Write	tREADY	tREADY2	MAX	500	ns

Table 8-6 AC Characteristics #RESET and RY/#BY

Esse winbond

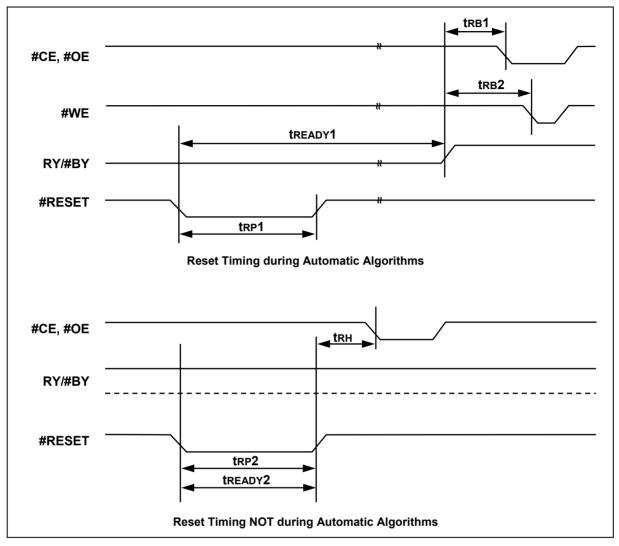


Figure 8-7 #RESET Timing Waveform

Esses winbond

8.5.3 Erase/Program Operation

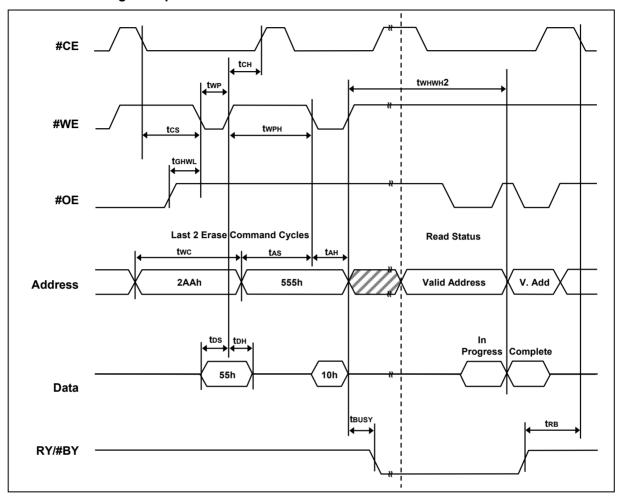


Figure 8-8 Automatic Chip Erase Timing Waveform

Selection Winbond

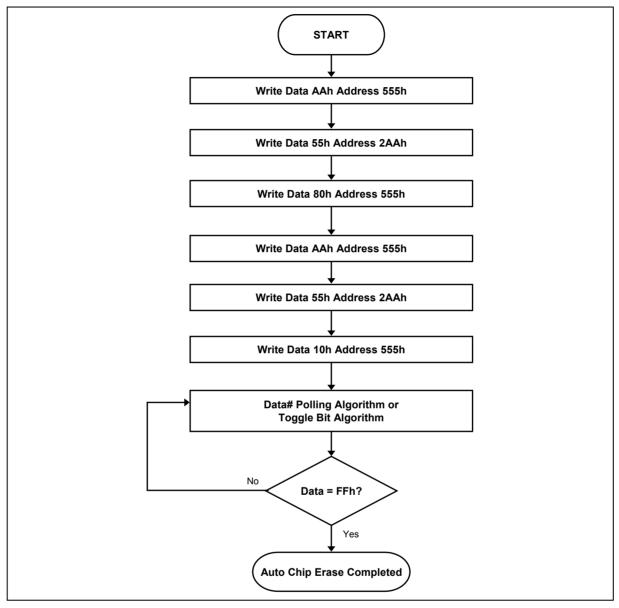


Figure 8-9 Automatic Chip Erase Algorithm Flowchart

Selection winbond

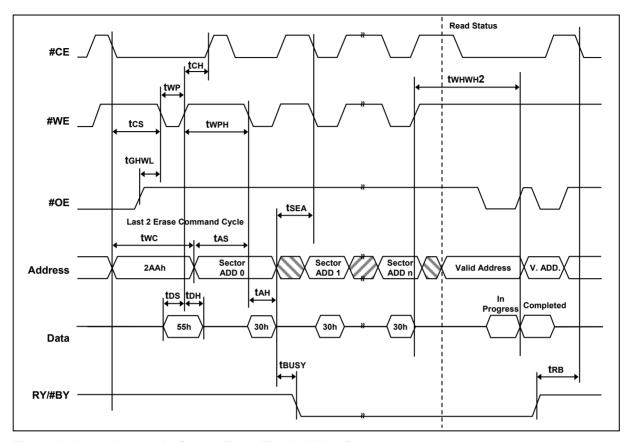


Figure 8-10 Automatic Sector Erase Timing Waveform

Esses winbond

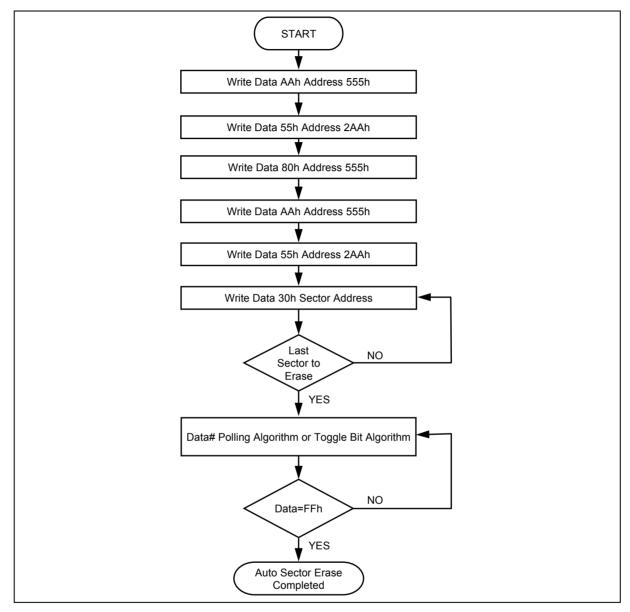


Figure 8-11 Automatic Sector Erase Algorithm Flowchart

TENNAL Winbond PART

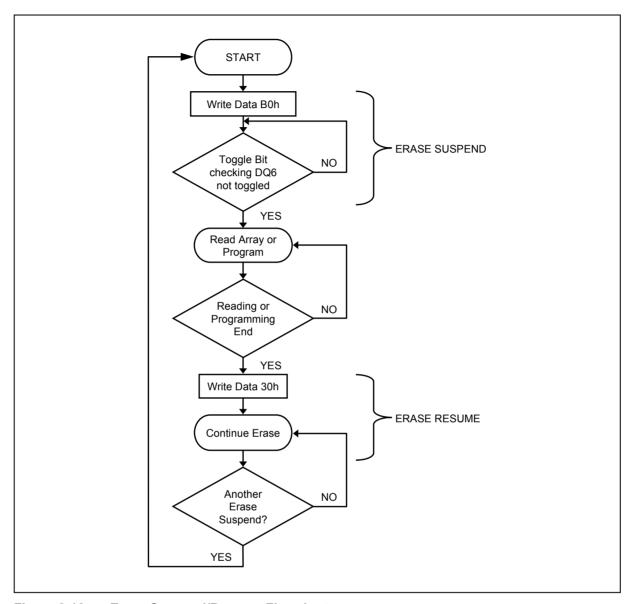


Figure 8-12 Erase Suspend/Resume Flowchart

Sell winbond

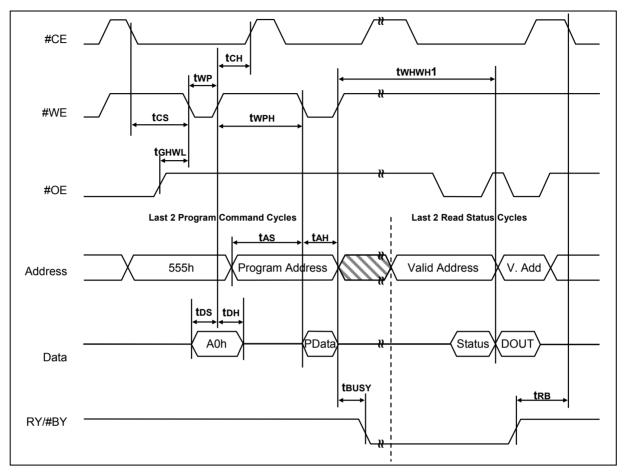


Figure 8-13 Automatic Program Timing Waveform

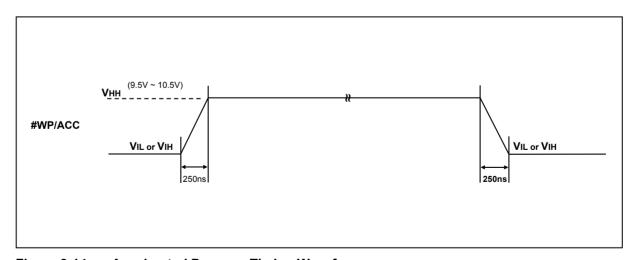


Figure 8-14 Accelerated Program Timing Waveform

Tall winbond

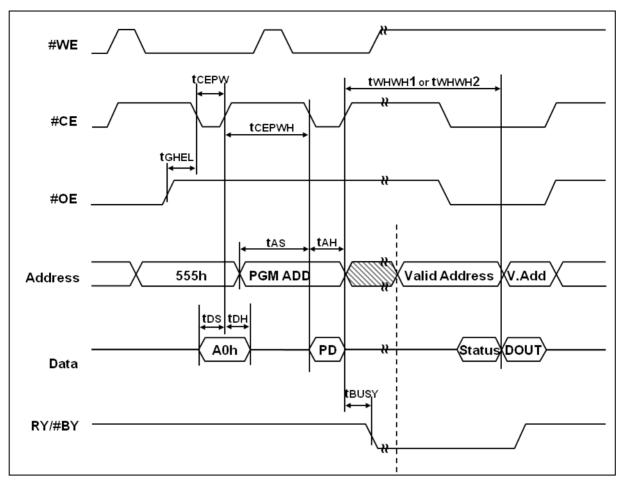


Figure 8-15 CE# Controlled Write Timing Waveform

Bases winbond

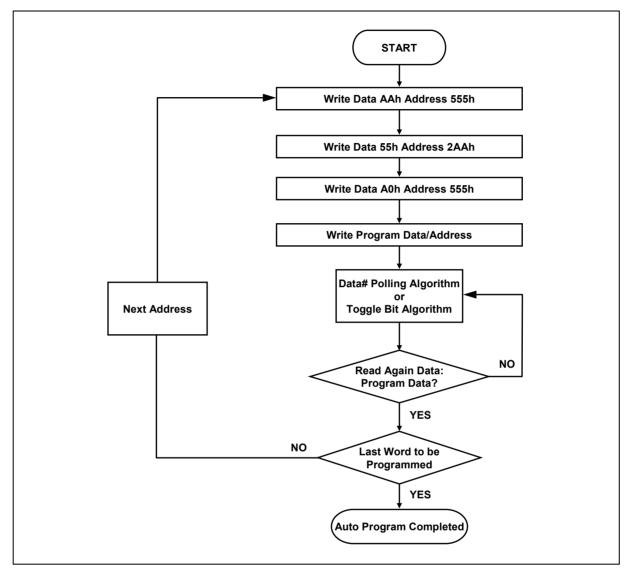


Figure 8-16 Automatic Programming Algorithm Flowchart

and winbond

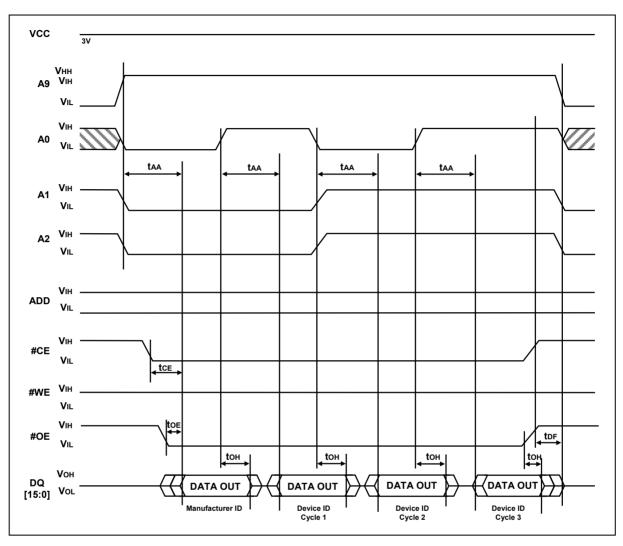


Figure 8-17 Silicon ID Read Timing Waveform

Esses winbond

8.5.4 Write Operation Status

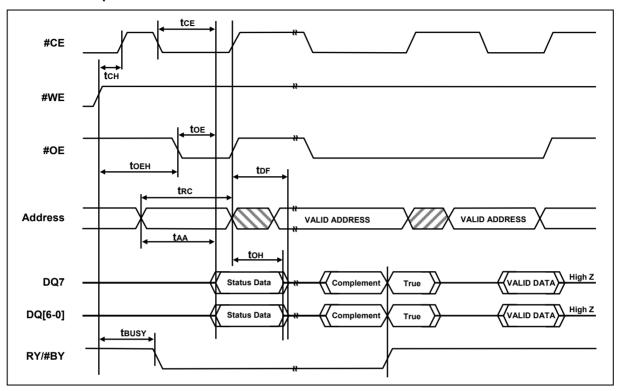


Figure 8-18 Data# Polling Timing Waveform (During Automatic Algorithms)

sala winbond a sala sa

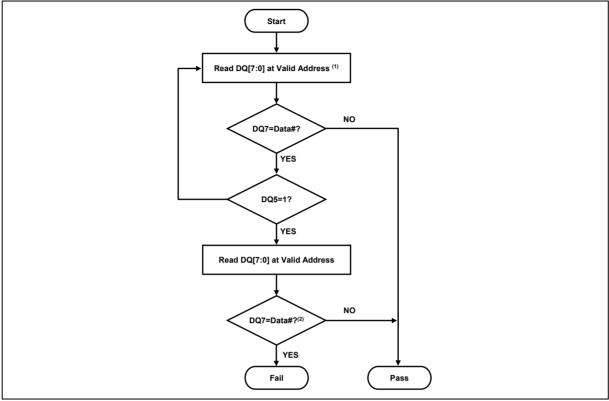


Figure 8-19 Status Polling for Word Programming/Erase

Notes:

- For programming, valid address means program address. For erasing, valid address means erase sectors address. DQ7 should be rechecked even DQ5="1" because DQ7 may change simultaneously with DQ5.

Selection Winbond

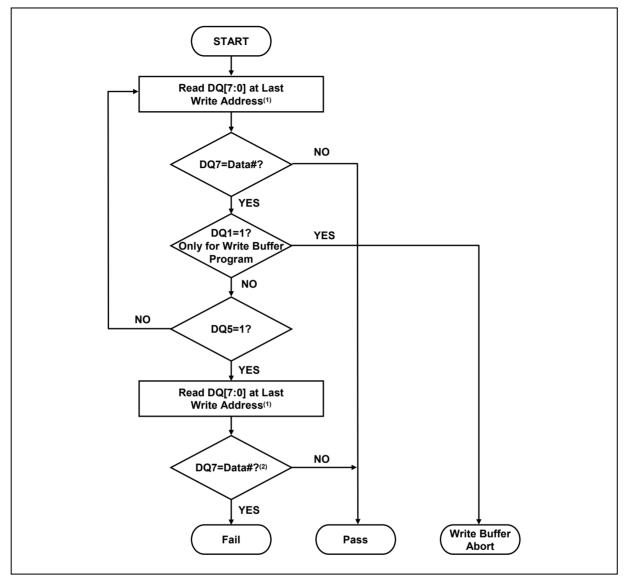


Figure 8-20 Status Polling for Write Buffer Program Flowchart

Notes:

- 1. For programming, valid address means program address.
- 2. For erasing, valid address means erase sectors address.
- 3. DQ7 should be rechecked even DQ5="1" because DQ7 may change simultaneously with DQ5.

see winbond

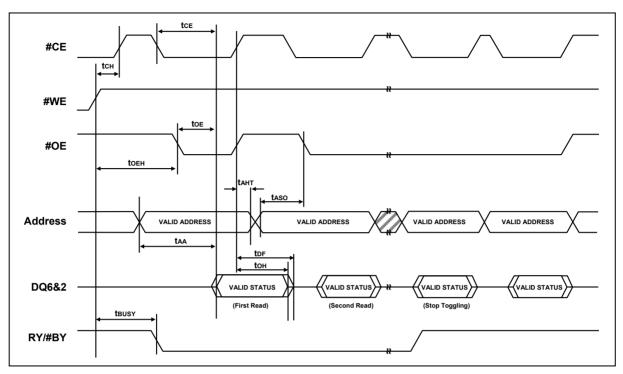


Figure 8-21 Toggling Bit Timing Waveform (During Automatic Algorithms)

Esses winbond

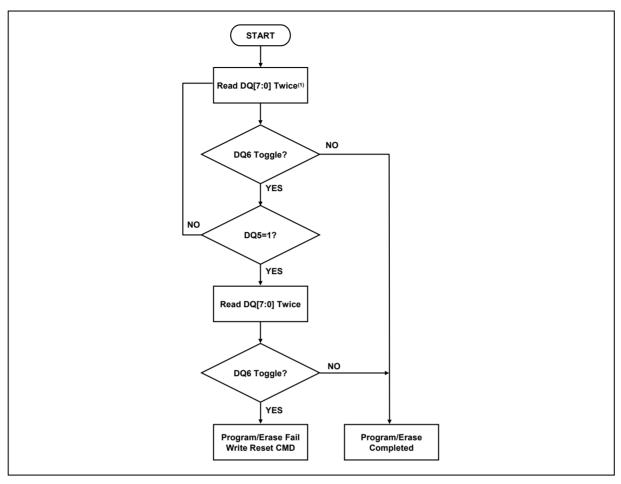


Figure 8-22 Toggle Bit Algorithm

Notes:

- 1. Read toggle bit twice to determine whether or not it is toggling.
- 2. Recheck toggle bit because it may stop toggling as DQ5 changes to "1".

8.5.5 WORD/BYTE CONFIGURATION (#BYTE)

Description	Symbol	Test Setup	All Speed options	Unit
#CE to #BYTE from L/H	telfl/telfh	MAX.	5	ns
#BYTE from L to Output Hiz	tFLQZ	Max.	30	ns
#BYTE from H to Output Active	tfhqv	Min.	90	ns

Table 8-7 AC Characteristics Word/Byte Configuration (#BYTE)

Table Winbond

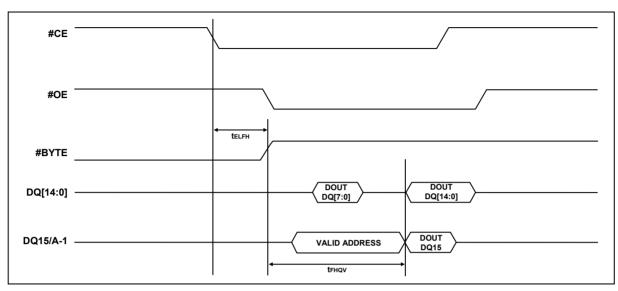


Figure 8-23 #BYTE Timing Waveform For Read operations

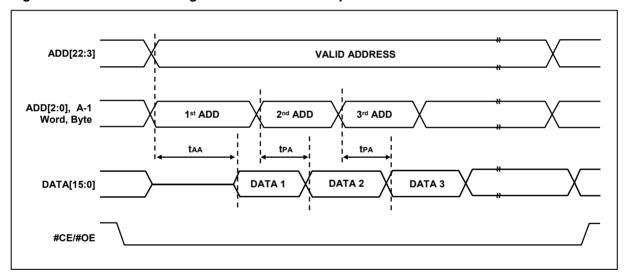


Figure 8-24 Page Read Timing Waveform



8.5.6 DEEP POWER DOWN MODE

Description	SYMBOL	TYP.	MAX
#WE High to release from Deep Power Down Mode	trdp	100µs	200µs
#WE High to Deep Power Down Mode	tDP	10µs	20µs

Table 8-8 AC Characteristics for Deep Power Down

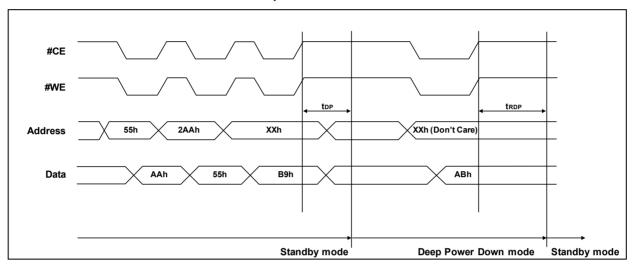


Figure 8-25 Deep Power Down mode Waveform

8.5.7 WRITE BUFFER PROGRAM

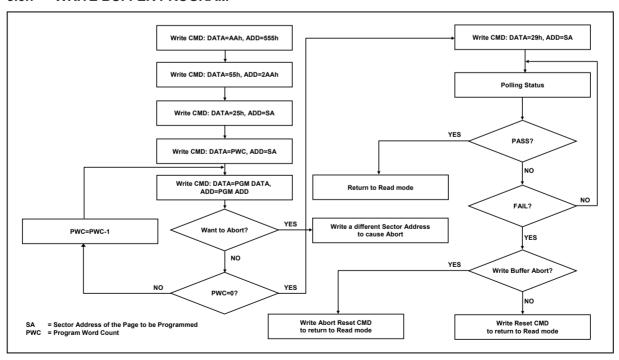


Figure 8-26 Write Buffer Program Flowchart



8.6 Recommended Operating Conditions

8.6.1 At Device Power-up

AC timing illustrated in Figure A is recommended for the supply voltages and the control signals at device power-up. If the timing in the figure is ignored, the device may not operate correctly.

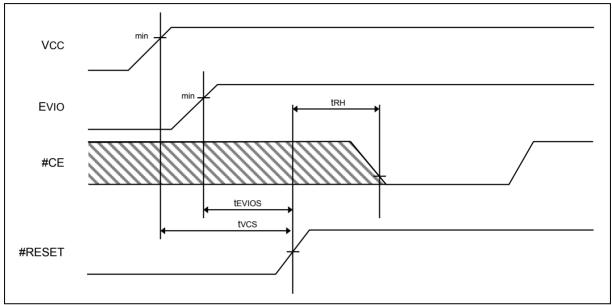


Figure 8-27 AC Timing at Device Power-Up Reference to #RESET

Description	SYN	/IBOL	MIN	MAX	UNIT
Description	ALT	STD	IVIIIN	IVIAA	UNII
Reset Low Time from rising edge of VCC	tvcs		35		μs
Reset Low time from rising edge of EVIO	tvios	tevios	35		μs
Reset High Time before Read	trh		200		ns

Table 8-9 AC Characteristics at Device Power Up



8.7 Erase and Programming Performance

DADAMETED		LIMITS				
PARAMETER	MIN	TYP ⁽¹⁾	MAX ⁽²⁾	UNITS		
Chip Erase Time		38.4	256	Sec		
Sector Erase Time		0.3	2	Sec		
Chip Programming Time		48	224	Sec		
Word Programming Time		6	28	μs		
Total Write Buffer Time		192		μs		
ACC Total Write Buffer Time		154		μs		
Erase/Program Cycles	100,000			Cycles		

Table 8-10 AC Characteristics for Erase and Programming Performance

Notes:

- 1. Typical program and erase times assume the following conditions: 25°C, 3.0V Vcc. Programming specifications assume checkerboard data pattern.
- 2. Maximum values are measured at Vcc = 3.0 V, worst case temperature. Maximum values are valid up to and including 100,000 program/erase cycles.
- 3. Erase/Program cycles comply with JEDEC JESD-47E & A117A standard.
- 4. Exclude 00h program before erase operation.

8.8 Data Retention

PARAMETER	CONDITION	MIN	MAX	UNIT
Data Retention	55°C	20		Years

Table 8-11 Data Retention

8.9 Latch-up Characteristics

PARAMETER	MIN	MAX
Input Voltage different with GND on #WP/ACC and A9 pins	-1.0V	10.5V
Input Voltage difference with GND on all normal input pins	-1.0V	1.5xVcc
Vcc Current	-100mA	+100mA
All pins included except Vcc. Test condition is Vcc=3.0V, one pin per test.		

Table 8-12 Latch-up Characteristics

8.10 Pin Capacitance

DESCRIPTION	PARAMETER	TEST SET	TYP.	MAX	UNIT
Control Pin Capacitance	CIN2	VIN=0	7.5	9	pF
Output Capacitance	COUT	VOUT=0	8.5	12	pF
Input Capacitance	CIN	VIN=0	6	7.5	pF

Table 8-13 Pin Capacitance

E

9 PACKAGE DIMENSIONS

9.1 TSOP 56-pin 14x20mm

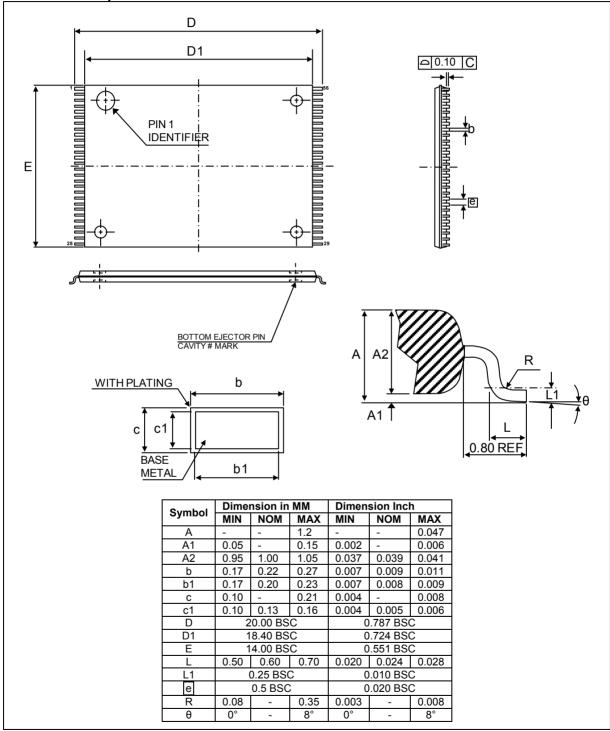


Figure 9-1 TSOP 56-pin 14x20mm

Esses winbond

9.2 Low-Profile Fine-Pitch Ball Grid Array, 64-ball 11x13mm (LFBA64)

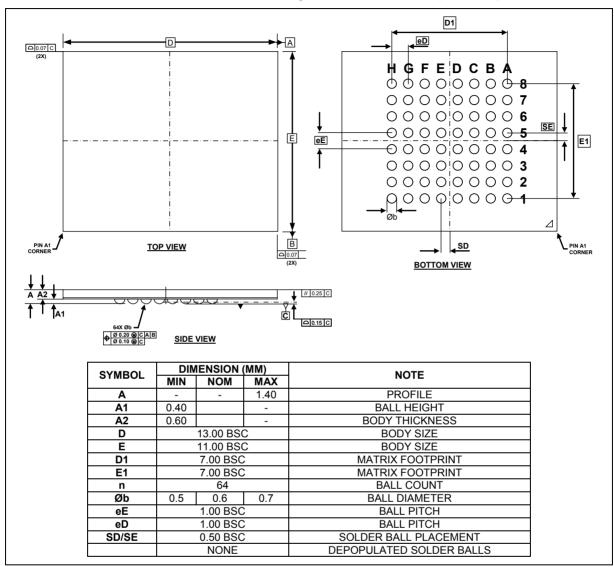


Figure 9-2 LFBGA 64-ball 11x13mm



10 ORDERING INFORMATION

10.1 Ordering Part Number Definitions

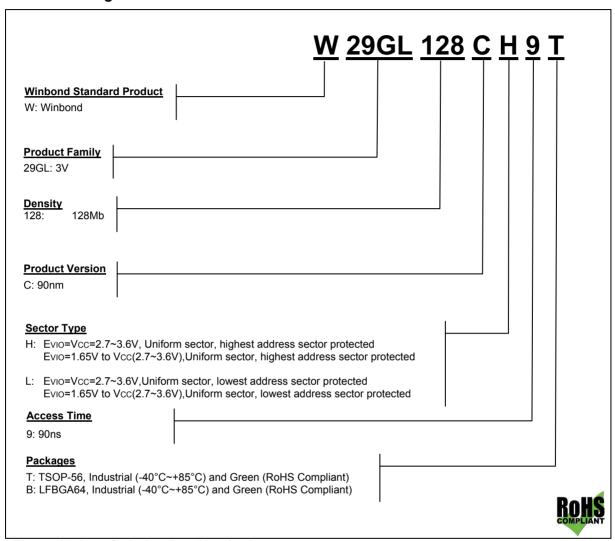


Figure 10-1 Ordering Part Numbering

Notes:

- 1. Winbond reserves the right to make changes to its products without prior notice.
- 2. Contact Winbond Sales for Secured Sector Lock Options.



10.2 Valid Part Numbers and Top Side Marking

The following table provides the valid part numbers for the W29GL128C Parallel Flash Memory. Please contact Winbond for specific availability by density and package type. Winbond Parallel memories use a 12-digit Product Number for ordering.

PACKAGE TYPE	DENSITY	PRODUCT NUMBER	TOP SIDE MARKING
TSOP-56	128Mb	W29GL128CH9T	W29GL128CH9T
TSOP-56	128Mb	W29GL128CL9T	W29GL128CL9T
LFBGA64	128Mb	W29GL128CH9B	W29GL128CH9B
LFBGA64	128Mb	W29GL128CL9B	W29GL128CL9B

Table 10-1 Valid Part Numbers and Markings



11 HISTORY

VERSION	DATE	PAGE	DESCRIPTION
Α	07-28-2010	-	Preliminary Issue
В	08-31-2010	Cover 1, 2, 55, 57	Cover images Updated. Updated BGA64 description.
		11,12, 20 30 28	Updated MFG ID to Industry standard code. ICC4 – Updated Condition Change. A9, #WP/ACC Voltage Range.
С	01-19-2011	52	Revised Waveform Diagram & AC Char at Device Power Table. tvR, tR, tF Removed
		32&52 32 & 42	Updated tvcs Updated tGHEL description & waveform.
		32	Removed Effective Write Buffer Program (Byte)
		32 32	Updated Effective Write Buffer Program (Word)
		32	Updated Program (Word/Byte) twhwh1. Updated follow parameters tbusy
		56&57	Updated Ordering Section
D	05-31-2011	12 54	VHH vs. ACC PGM warning Correct TSOP missing E parameter
		32 & 53	Correct Parameter Category tRC & Cycling
E	10-18-2011	20	Section 7.4.2 1st Paragraph removed 'erase'
		32	Section 7.4.2 3 rd Paragraph Add OTP statement. tcwc added definition to Table 8.5
		32 & 33	twнwн1 & twнwн2 moved parameter to Typ.

Table 11-1 Revision History

Preliminary Designation

The "Preliminary" designation on a Winbond datasheet indicates that the product is not full characterized. The specifications are subject to change and are not guaranteed. Winbond or an authorized sales representative should be consulted for current information before using this product.

Trademarks

Winbond is a trademark of Winbond Electronics Corporation. All other marks are the property of their respective owner.

Important Notice

Winbond products are not designed, intended, authorized or warranted for use as components in systems or equipment intended for surgical implantation, atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, or for other applications intended to support or sustain life. Furthermore, Winbond products are not intended for applications wherein failure of Winbond products could result or lead to a situation wherein personal injury, death or severe property or environmental damage could occur. Winbond customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Winbond for any damages resulting from such improper use or sales.

Information in this document is provided solely in connection with Winbond products. Winbond reserves the right to make changes, corrections, modifications or improvements to this document and the products and services described herein at any time, without notice.