



1N60 THRU 1N60P

SMALL SIGNAL SCHOTTKY DIODE

Reverse Voltage - 40 to 45 Volts

Forward Current - 0.03 / 0.05 Ampere

FEATURES

- Metal-on-silicon junction, majority carrier conduction
- High current capability, Low forward voltage drop
- Extremely low reverse current I_r
- Ultra speed switching characteristics
- Small temperature coefficient of forward characteristics
- Satisfactory Wave detection efficiency
- For use in RECORDER TV RADIO TELEPHONE as detectors, super high speed switching circuits, small current rectifier

MECHANICAL DATA

Case: DO-35 glass case


Polarity : Color band denotes cathode end

Mounting Position : Any

Weight : 0.13 grams



DO-35

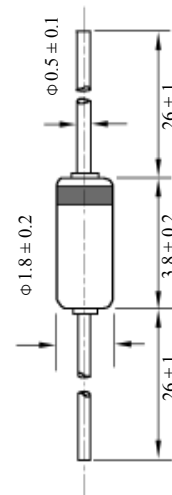

All Dimensions in mm

ABSOLUTE RATINGS(LIMITING VALUES)

Symbols	Parameters		Value		Units
			1N60	1N60P	
V_{RRM}	Repetitive Peak Reverse Voltage		40	45	Volts
I_F	Forward Continuous Current	$T_A=25^\circ C$	30	50	mA
I_{FSM}	Peak Forward Surge Current($t=1S$)		150	400	mA
T_{STG}/T_J	Storage and junction Temperature Range		-65 to +125		$^\circ C$
T_L	Maximum Lead Temperature for Soldering during 10S at 4mm from Case		230		$^\circ C$

ELECTRICAL CHARACTERISTICS

Symbols	Parameters	Test Conditions		Value			Units
				Min.	Typ.	Max.	
V_F	Forward Voltage	$I_F=1mA$	1N60		0.32	0.5	Volts
			1N60P		0.24	0.5	
		$I_F=30mA$	1N60		0.65	1.0	
			1N60P		0.65	1.0	
I_R	Reverse Current	$V_R=15V$	1N60		1.0	5.0	μA
			1N60P		5.0	10.0	
C_J	Junction Capacitance	$V_R=1V$ $f=1MHz$	1N60		2.0		pF
		$V_R=10V$ $f=1MHz$	1N60P		6.0		
η	Detection Efficiency(See diagram 4)	$V_i=3V$ $f=30MHz$ $C_L=10pF$ $R_L=3.8k\Omega$			60		%
t_{rr}	Reverse Recovery time	$I_F=I_R=1mA$ $I_{rr}=1mA$ $R_C=100\Omega$				1	ns
$R_{\theta JA}$	Junction Ambient Thermal Resistance				400		$^\circ C/W$



1N60 THRU 1N60P

RATINGS AND CHARACTERISTIC CURVES

1N60

FIG. 1-FORWARD CURRENT VERSUS FORWARD VOLTAGE (TYPICAL VALUES)

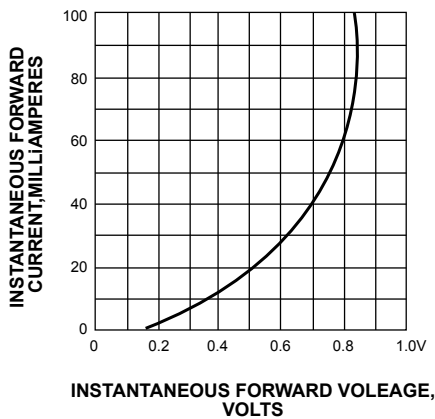


FIG. 2-REVERSE CURRENT VERSUS CONTINUOUS REVERSE VOLTAGE


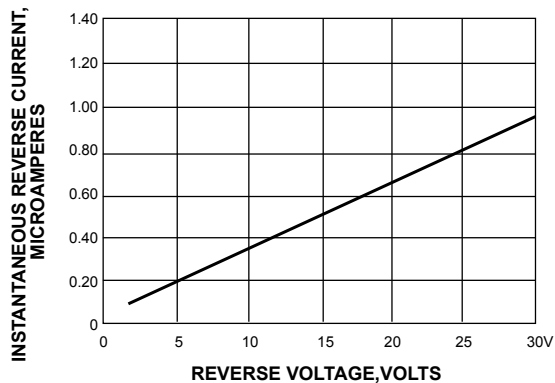


FIG. 3-JUNCTION CAPACITANCE VERSUS CONTINUOUS REVERSE APPLIED VOLTAGE

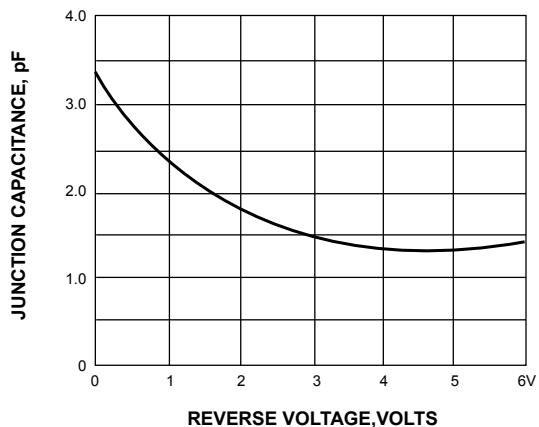

1N60P

FIG. 1-FORWARD CURRENT VERSUS FORWARD VOLTAGE (TYPICAL VALUES)

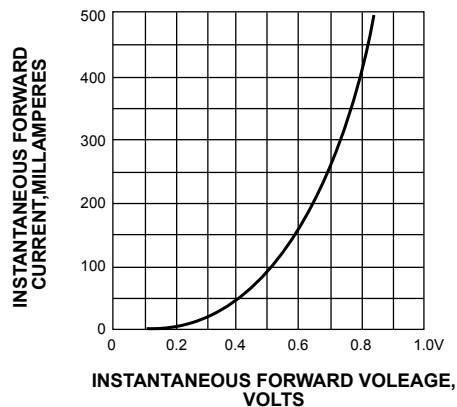


FIG. 2-REVERSE CURRENT VERSUS CONTINUOUS REVERSE VOLTAGE

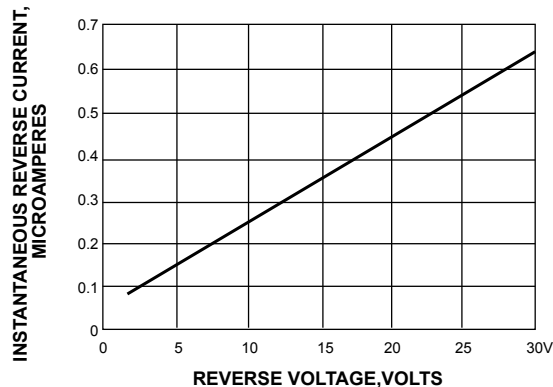


FIG. 3-JUNCTION CAPACITANCE VERSUS CONTINUOUS REVERSE APPLIED VOLTAGE

