



High Speed Precision Comparator

CMP-05

FEATURES

- Precision Input Stage
 - Input Offset Voltage 150 μ V
 - Input Offset Current 15nA
- Fast Response Time (5mV Overdrive) 38ns
- High Voltage Gain 16,000V/V
- Latch Function with TTL Compatible Input
- TTL Compatible Output
- Available in Hermetic Mini-DIP Package
- Available in Die Form

ORDERING INFORMATION ^t

$T_A = +25^\circ\text{C}$	PACKAGE			OPERATING TEMPERATURE RANGE
V_{OS} (μ V)	CERDIP 8-PIN	PLASTIC 8-PIN	SO 8-PIN	
600 CMP05BZ/883	CMP05BZ/883	-	-	MIL
600 CMP05FJ	CMP05FZ	-	-	IND
1000 CMP05SC/883	CMP05CZ*	CMP05GP	CMP05GS	MIL
1000 -	-	-	XIND	

* For devices processed in total compliance to MIL-STD-883, add /883 after part number. Consult factory for 883 data sheet.

^t Burn-in is available on commercial and industrial temperature range parts in CerDIP, plastic DIP, and TO-can packages.

GENERAL DESCRIPTION


The CMP-05's very high speed and precision input specifications make it the ideal comparator in systems needing 12-bit

accuracy along with high speed. An exceptionally fast response time of 60nsec is possible with only 1/2 LSB overdrive (12-bit, 10-volt system).


The CMP-05 design makes it the ideal component in systems requiring high speed with excellent low-level analog signal resolution. High-speed 12-bit successive approximation A/D converters, zero crossing detectors and logic threshold detectors are typical system applications.

3

PIN CONNECTIONS

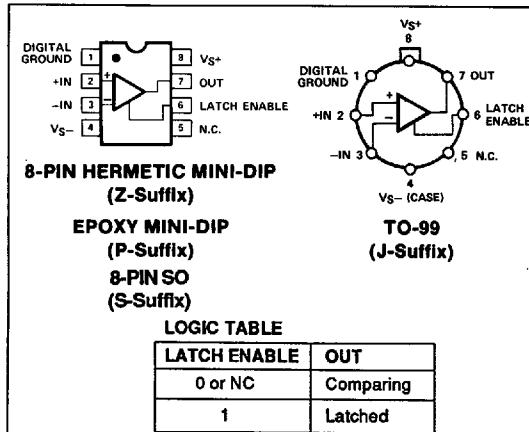

SIMPLIFIED SCHEMATIC

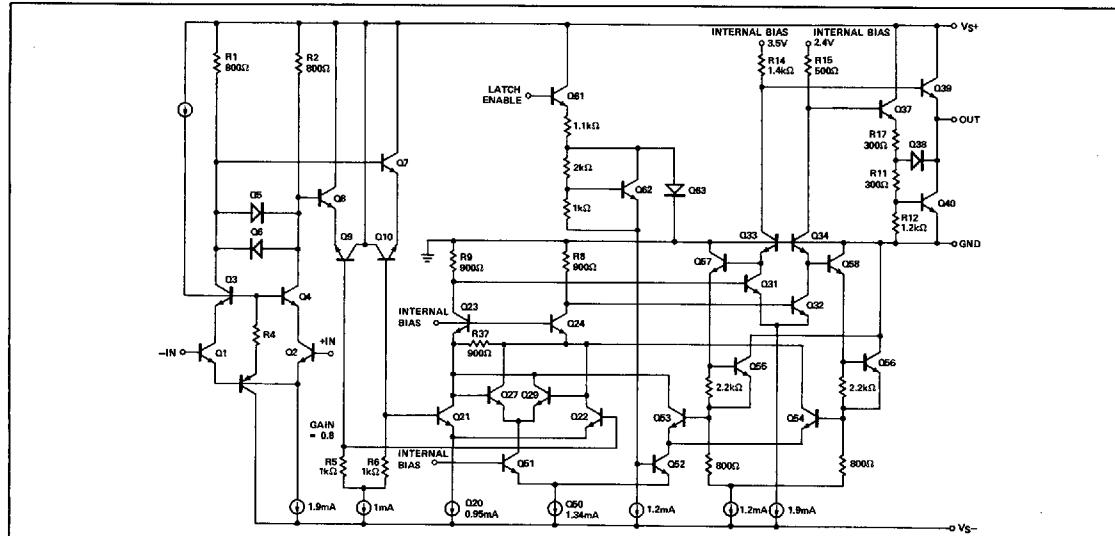

CMP-05**T-73-53****ABSOLUTE MAXIMUM RATINGS (Note 1)**

Positive Supply Voltage	+6V
Negative Supply Voltage	-18V
Differential Input Voltage	±5V
Latch Enable Input Voltage	-0.5V to V+ Supply
Operating Temperature Range		
CMP-05B/C (J, Z) (Note 2)	-55°C to +125°C
CMP-05F/G (J, P, S, Z)	-40°C to +85°C
Junction Temperature (T_j)	-65°C to +150°C
Storage Temperature Range	-65°C to +150°C
P-Suffix	-65°C to +125°C
Lead Temperature (Soldering, 60 sec)	300°C
Output Short-Circuit Duration		
To Ground	Indefinite
To V+ = 5.0V	1 Minute

ELECTRICAL CHARACTERISTICS at $V_{S+} = 5.0V$, $V_{S-} = -5.0V$, $T_A = 25^\circ C$ and Latch Enable grounded, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	CMP-05B/F			CMP-05C/G			UNITS
			MIN	Typ	MAX	MIN	Typ	MAX	
Input Offset Voltage	V_{OS}	$R_S = 50\Omega$	—	150	600	—	400	1000	μV
Input Offset Current	I_{OS}		—	15	80	—	30	150	nA
Input Bias Current	I_B		—	0.6	1.2	—	0.8	1.8	μA
Voltage Gain	A_{VO}	(Note 1)	8	16	—	7	14	—	V/mV
Input Voltage Range	CMVR	(Note 1)	±3.0	±3.3	—	±3.0	±3.3	—	V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 3.0V$, (Note 1)	86	91	—	84	89	—	dB
Power Supply Rejection Ratio	PSRR	$V_S = \pm 4.75V$ to $V_S = \pm 5.25V$	—	51	126	—	64	126	
		P Package	—	—	—	—	120	360	
		$V_{S+} = 5V$, $V_{S-} = -5V$ to $-15V$	—	15	51	—	18	63	$\mu V/V$
		P Package	—	—	—	—	36	180	
Output High Voltage	V_{OH}	$V_{IN} \geq 10mV$, $I_O = 0\mu A$	2.4	2.9	—	2.4	2.9	—	
		$V_{IN} \geq 10mV$, $I_O = 320\mu A$	2.4	2.9	—	—	—	—	V
		$V_{IN} \geq 10mV$, $I_O = 200\mu A$	—	—	—	2.4	2.9	—	
Saturation Voltage	V_{SAT}	$V_{IN} \leq -10mV$, $I_{SINK} = 0mA$	—	0.13	0.40	—	0.13	0.40	
		$V_{IN} \leq -10mV$, $I_{SINK} = 8mA$	—	—	—	—	0.28	0.40	
		$V_{IN} \leq -10mV$, $I_{SINK} = 12.8mA$	—	0.32	0.40	—	—	—	V
Positive Supply Current	I_{S^+}	$V_O \leq 2.4V$, (Note 1)	—	7.5	11	—	8.0	12	
		$V_O \leq 0.4V$	—	10	15	—	11	16	mA
Negative Supply Current	I_{S^-}	$V_O \leq 0.4V$	—	11	16	—	12	18	mA
Power Dissipation	P_d	$V_O \leq 0.4V$	—	105	155	—	115	170	mW
Latch Input Voltage	V_{LH}	Over Operating Temp. Range	2.0	—	—	2.0	—	—	
		Latch Enabled, (Note 1)	—	—	—	—	—	—	V
Logic 0	V_{LL}	Over Operating Temp. Range	—	—	0.8	—	—	0.8	
		Latch Disabled, (Note 1)	—	—	—	—	—	—	
Latch Input Current	I_{LH}	$V_{LH} = 3.0V$, (Note 1)	—	10	45	—	10	45	
		$V_{LL} = 0.8V$, (Note 1)	—	6	25	—	6	25	μA
Input to Output High Response Time	t_{pd+}	$V_{OD} = 1.2mV$, (Note 2)	—	60	—	—	60	—	
		$V_{OD} = 5.0mV$, (Note 2)	—	41	55	—	41	55	ns
Input to Output Low Response Time	t_{pd-}	$V_{OD} = 1.2mV$, (Note 2)	—	60	—	—	60	—	
		$V_{OD} = 5.0mV$, (Note 2)	—	37	55	—	37	55	ns
Latch Disable Time	t_{LPD}	(Note 3)	—	50	65	—	50	65	ns

NOTES:

1. Guaranteed by design.

2. Times are for 100mV step inputs. See switching time waveforms.

3. See switching time waveforms.

ELECTRICAL CHARACTERISTICS at $V_{S+} = 5.0V$, $V_{S-} = -5.0V$, and Latch Enable grounded, $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for CMP-05B/C, $-25^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for CMP-05F, $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for CMP-05G, unless otherwise noted.


T-73-53

PARAMETER	SYMBOL	CONDITIONS	CMP-05B/F			CMP-05C/G			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V_{OS}	$R_S = 50\Omega$	—	0.3	1.5	—	0.55	2.0	mV
Input Offset Voltage Drift	TCV_{OS}		—	1.5	7.5	—	2.5	15	$\mu\text{V}/^{\circ}\text{C}$
Input Offset Current	I_{OS}		—	40	250	—	70	400	nA
Input Bias Current	I_B		—	1.1	2.5	—	1.5	3.8	μA
Voltage Gain	A_{VO}	(Note 1)	6	11	—	5	10	—	V/mV
Input Voltage Range	CMVR	(Note 1)	± 2.9	± 3.2	—	± 2.9	± 3.2	—	V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 2.9V$, (Note 1)	83	90	—	80	88	—	dB
Power Supply Rejection Ratio	PSRR	$\pm 4.75V \leq V_S \leq \pm 5.25V$ P Package	—	63	178	—	80	252	$\mu\text{V/V}$
Output High Voltage	V_{OH}	$V_{IN} \geq 10mV$, $I_O = 0\mu\text{A}$ $V_{IN} \geq 10mV$, $I_O = 240\mu\text{A}$ $V_{IN} \geq 10mV$, $I_O = 160\mu\text{A}$	2.4	—	—	2.4	—	—	V
Saturation Voltage	V_{SAT}	$V_{IN} \leq -10mV$, $I_{SINK} = 0mA$ $V_{IN} \leq -10mV$, $I_{SINK} = 9.6mA$ $V_{IN} \leq -10mV$, $I_{SINK} = 6.4mA$	—	0.18	0.40	—	0.20	0.40	V
Positive Supply Current	I_{S+}	$V_O \leq 0.4V$	—	11	16	—	12	17	mA
Negative Supply Current	I_{S-}	$V_O \leq 0.4V$	—	12	17	—	13	19	mA
Power Dissipation	P_d	$V_O \leq 0.4V$	—	115	165	—	125	180	mW
Latch Input Current									
Logic 1	I_{LH}	$V_{LH} = 3V$, (Notes 1, 4)	—	18	90	—	18	90	μA
Logic 0	I_{LL}	$V_{LL} = 0.8V$, (Notes 1, 4)	—	10	50	—	10	50	μA
Input to Output High Response Time	t_{pd+}	$V_{OD} = 1.2mV$, (Note 2) $V_{OD} = 5.0mV$, (Note 2)	—	125	—	—	125	—	ns
Input to Output Low Response Time	t_{pd-}	$V_{OD} = 1.2mV$, (Note 2) $V_{OD} = 5.0mV$, (Note 2)	—	92	—	—	92	—	ns
Latch Disable Time	t_{LPD+} t_{LPD-}	(Notes 2, 4)	—	115	—	—	115	—	ns
			—	88	—	—	88	—	ns
			—	56	—	—	56	—	ns
			—	30	—	—	30	—	ns

NOTES:


- Guaranteed by design.
- Times are for 100mV step inputs. See switching time waveforms.
- A high on the latch enable input will cause the latch to assume the state

- of the comparator and not follow subsequent inputs.
- Latch is functional for $-55^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$.

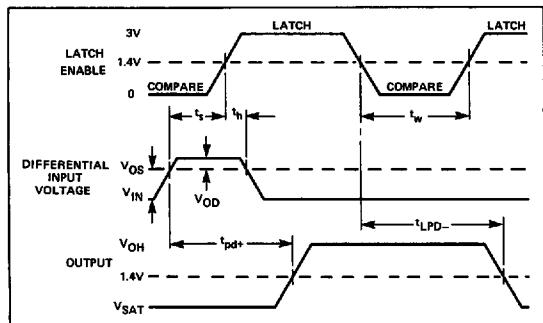SWITCHING TIME WAVEFORMS**Minimum Input Timing Requirements***

Parameter	Minimum Limit	Units
t_s Setup Time	35	
t_h Hold Time	10	ns
t_w Latch Pulse Width	25	

* t_s , t_h , t_w are tested with $V_{IN} = 100mV$ and $V_{OD} = 5mV$.

CMP-05**DICE CHARACTERISTICS**

1. DIGITAL GROUND
2. NONINVERTING INPUT
3. INVERTING INPUT
4. NEGATIVE SUPPLY (SUBSTRATE)
6. LATCH ENABLE
7. OUTPUT
8. POSITIVE SUPPLY

DIE SIZE 0.052 × 0.046 inch, 2392 sq. mils
(1.321 × 1.168mm, 1.543 sq. mm)

T-73-53

WAFER TEST LIMITS at $V_S = \pm 5V$, $T_A = 25^\circ C$, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	CMP-05G LIMIT	UNITS
Input Offset Voltage	V_{OS}	$R_S = 50\Omega$	1000	μV MAX
Input Offset Current	I_{OS}		150	nA MAX
Input Bias Current	I_B		1.8	μA MAX
Voltage Gain	A_{VO}	(Note 1)	7	V/mV MIN
Input Voltage Range	CMVR	(Note 1)	±3.0	V MIN
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 2.9V$ (Note 1)	80	dB MIN
Power Supply Rejection Ratio	PSRR	$\pm 4.75 \leq V_S \leq \pm 5.25$ $V_{S+} = 5V, V_{S-} = -5V$ to $-15V$	178 63	$\mu V/V$ MAX
Positive Output Voltage	V_{OH}	$V_{IN} \geq 10mV, I_O = 0\mu A$	2.4	V MIN
Saturation Voltage	V_{SAT}	$V_{IN} \leq 10mV, I_O = 0\mu A$	0.4	V MAX
Positive Supply Current	I_+	$V_O \leq 0.4V$	16	mA MAX
Negative Supply Current	I_-	$V_O \leq 0.4V$	18	mA MAX
Negative Supply Current	I_-	$V_- = -15V, V_O \leq 0.4V$	20	mA MAX
Latch Input Voltage				
Logic 1	V_{LH}	Latch Enabled	2.0	V MIN
Logic 0	V_{LL}	Latch Disabled	0.8	V MAX
Latch Input Current				
Logic 1	I_{LH}	$V_{LH} = 3.0V$, (Notes 1, 4)	45	
Logic 0	I_{LL}	$V_{LL} = 0.8V$, (Notes 1, 4)	25	μA MAX
Input to Output High Response Time	t_{pd+}	$V_{OD} = 5.0mV$, (Notes 1, 2)	60	ns MAX
Input to Output Low Response Time	t_{pd-}	$V_{OD} = 5.0mV$, (Notes 1, 2)	60	ns MAX

NOTE:

Electrical tests are performed at wafer probe to the limits shown. Due to variations in assembly methods and normal yield loss, yield after packaging is not guaranteed for standard product dice. Consult factory to negotiate specifications based on dice lot qualification through sample lot assembly and testing.

TYPICAL ELECTRICAL CHARACTERISTICS at $V_S = \pm 5V$, $T_A = 25^\circ C$, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	CMP-05G TYPICAL	UNITS
Input to Output High Response Time	t_{pd+}	$V_{OD} = 1.2mV$, (Note 2)	41	ns
Input to Output Low Response Time	t_{pd-}	$V_{OD} = 1.2mV$, (Note 2)	37	ns
Latch Disable Time	t_{LPD}	(Notes 3, 4)	50	ns







NOTES:

1. Guaranteed by design.
2. Times are for 100mV step inputs.
3. See switching time waveforms.
4. Latch is functional for $-55^\circ C \leq T_A \leq 85^\circ C$.


CMP-05

TYPICAL PERFORMANCE CHARACTERISTICS


T-73-53

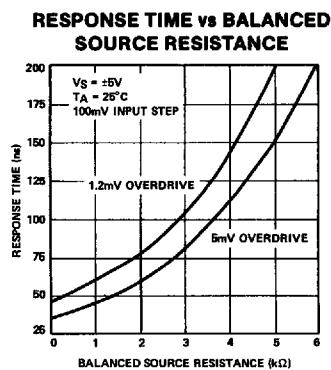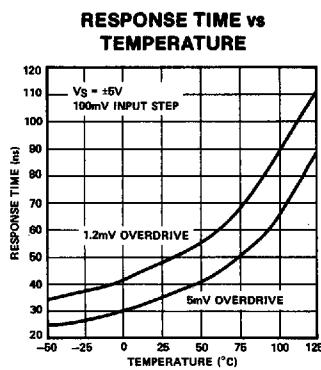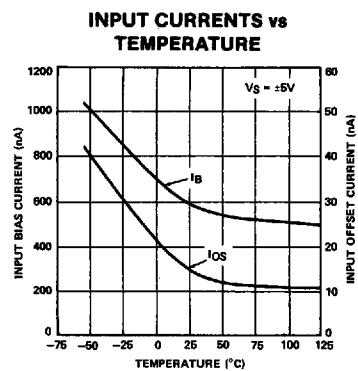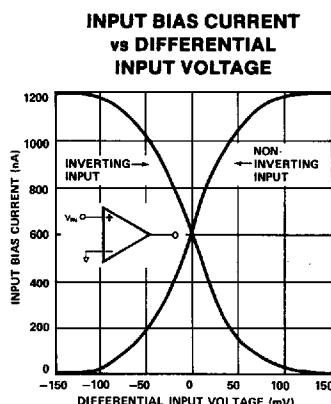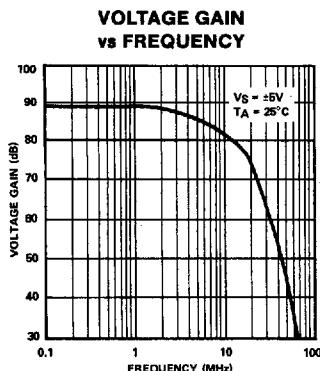


STANDARD BURN-IN CIRCUIT



RESPONSE PHOTOGRAPH TEST SET-UP









RESPONSE TO 25MHZ SINE WAVE

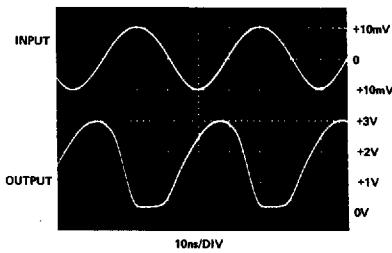

CMP-05

TYPICAL PERFORMANCE CHARACTERISTICS

T-73-53

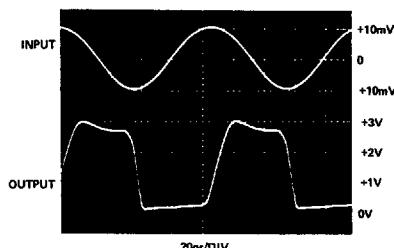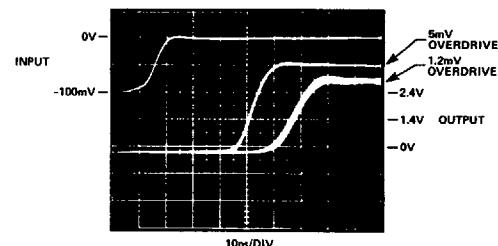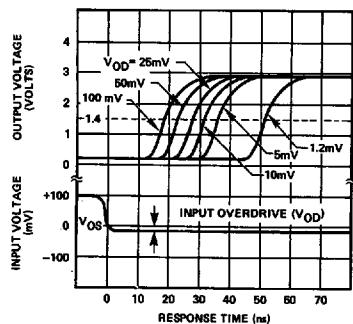RESPONSE TO 10MHz SINE WAVE**RESPONSE TIME TO 5mV AND 1.2mV (= 1/2 LSB) OVERDRIVES** **t_{pd+} RESPONSE TIME** **t_{pd-} RESPONSE TIME****CMP-05 NEGATIVE COMMON-MODE INPUT RANGE vs NEGATIVE SUPPLY****RESPONSE TIME vs OVERDRIVE VOLTAGE**

T-73-53


CMP-05

APPLICATION INFORMATION


The CMP-05 is a very accurate device providing fast response time even with small—Microvolt level—overdrives. To achieve this performance requires high gain at high frequencies. As shown in the voltage gain versus frequency curve, the gain-bandwidth product of the CMP-05 is 1.5×10^{11} Hz. It maintains its full gain to approximately 8MHz and rolls off at a very fast rate beyond that frequency due to the fact that five poles occur in the 30 to 60MHz range. At 30MHz the gain of the comparator is still 2000. Therefore, in the transition region small values of source lead inductance and stray feedback capacitance can cause an oscillatory condition.

For example (in the figure below) with $L = 0.1\mu H$, $C_S = 0.15pF$, the closed-loop gain of the circuit at 30MHz is:

$$A_V = \frac{1}{LC_S \omega^2} = \frac{1}{10^{-7} \times 0.15 \times 10^{-12} \times (2\pi \times 30 \times 10^6)^2} = 1880$$

POTENTIAL FEEDBACK SOURCES

With the open-loop gain at 2000 oscillation will occur since the phase shift exceeds 180° . To minimize these problems power supplies should be decoupled, lead lengths should be kept as short as possible, and a ground plane should be used to reduce the stray feedback capacitance. In addition, a ground plane substantially diminishes the possibility of the output current spike coupling back to the inputs through the ground lead. Keeping a separate digital ground (pin 1) and analog ground (to which the inputs are referenced) also reduces the magnitude of the problem.

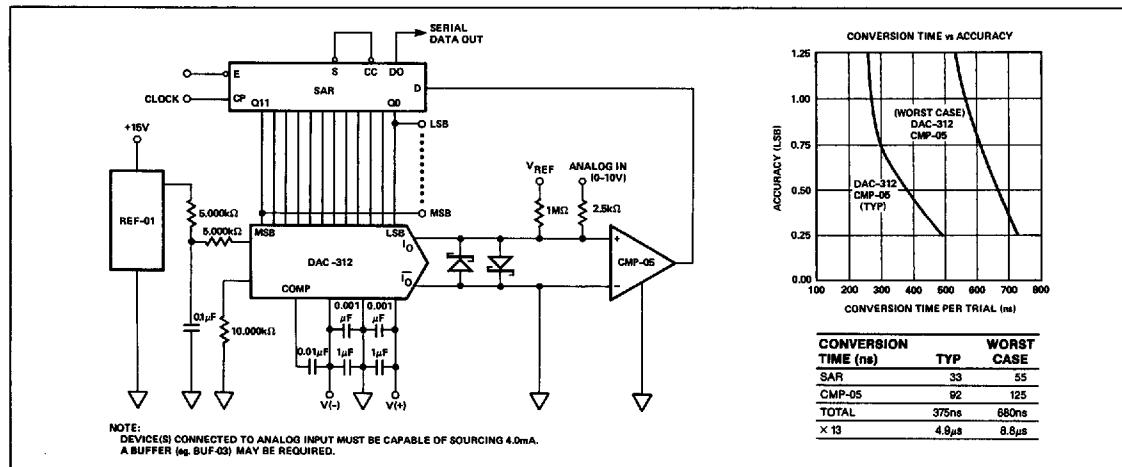12-BIT FAST A/D CONVERTER

Fortunately, in high-speed circuitry the comparator inputs will be driven at a fast rate, in which case no transition region oscillations will occur. As the minimum slew rate versus source resistance curve indicates, if the input is driven at a rate exceeding $6mV/\mu sec$, no oscillations will occur with source resistors of less than $1k\Omega$. Examples of "clean" transitions can be observed in the photographs of the response time with $5mV$ and $1.2mV$ overdrives, and the response to the 10 and 25MHz input signals.

In order to not degrade its speed the CMP-05's inputs are not internally clamped. If large differential voltages are present it is recommended that the inputs be clamped with high speed, low capacitance diodes such as the H.P. 5082-2835, which is a Schottky Diode.

As in all high-speed devices, it is to the user's advantage to keep the source impedances low and matched.

LATCH

The CMP-05 has a latch feature which functions over $-55^\circ C$ to $+85^\circ C$. When the latch is enabled, the output stays in its existing logic state regardless of the input signal. The input timing requirements of the latch are presented in the Switching Time Waveforms. The latch opens up a broader applications area at no sacrifice in total system speed. Effectively, the latch allows high speed sampling of comparison decisions. This is important in automatic test equipment limit comparators, in measuring pods used in logic analyzers and other similar synchronous measurement circuitry needing fast clocking frequencies. The latch pulse width t_w allows sampling of input signals to take place in 25nsec.

The latch prevents self oscillation (due to positive feedback) from taking place when slowly-moving high-source-impedance signals pass thru the linear amplification region of the comparator. This is successfully accomplished by rapidly strobing the comparator near its minimum t_w time which prevents self oscillation from making a complete cycle since t_w is shorter than the total response time t_{pd} through the comparator.