

THREE-TERMINAL LOW POWER
VOLTAGE REGULATORS

DESCRIPTION

The UTC UT10XX series is a set of three-Terminal low power voltage regulators implemented in CMOS technology . They are available with several fixed output voltages ranging from 1.5V~7.0V. The advantage of CMOS technology is low voltage dropout and low quiescent current.


Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain variable voltages and currents.

FEATURES

- * Low power consumption
- *Low voltage dropout
- *Low temperature coefficient
- *Wide operating voltage (12V Max.)


APPLICATIONS

- *Battery-powered equipment
- *Communication equipment
- *Audio/Video equipment

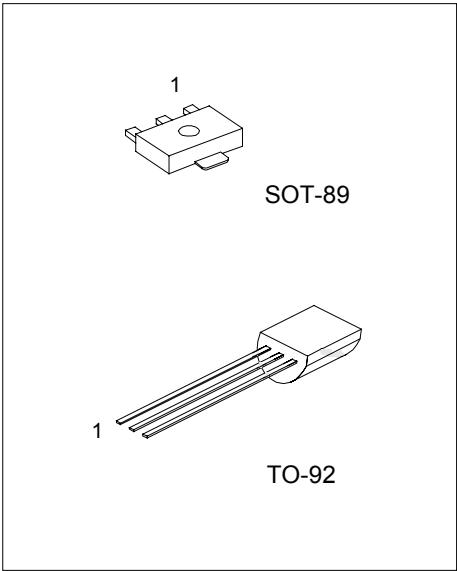

TO-92 : UT10XX-B : 1: VOUT 2: GND 3: VIN
TO-92 : UT10XX-C : 1: GND 2:VIN 3:VOUT
SOT-89 : 1: GND 2:VIN 3:VOUT

PAD ASSIGNMENT

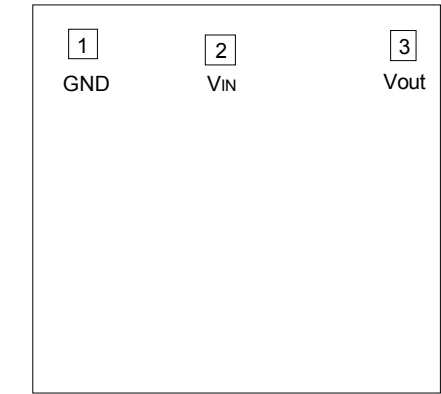


PAD NO.	X	Y
1	184	1137
2	615	1121
3	1194	1132

Unit: μ m

Chip size: 1.34 × 1.30 mm²

*The IC substrate should be connected to VDD in the PCB layout artwork.

BLOCK DIAGRAM

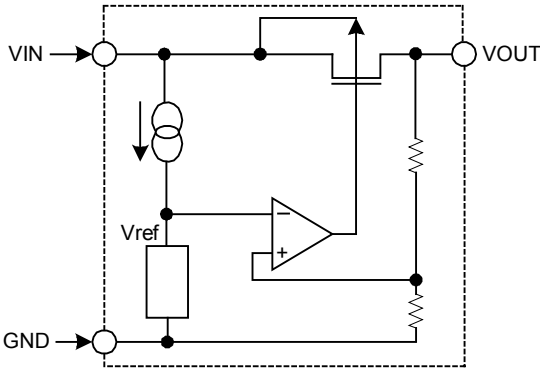

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	Vcc	-0.3 ~ +13	V
Power Dissipation	Pd	250	mW
Storage Temperature	Tstg	-50 ~ +125	°C
Operating Temperature	Topr	0 ~ +70	°C

UTC UT1025 (+2.5V output type) ELECTRICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	VOUT	VIN=4.5V, IOUT=10mA ±2.4% ±5%	2.440 2.375	2.5 2.5	2.560 2.625	V
Output Current	IOUT	VIN=4.5V	20	30		mA
Load Regulation	ΔVOUT	VIN=4.5V, 1mA ≤ IOUT ≤ 20mA		60	100	mV
Voltage Dropout	Vd	IOUT=1mA		60		mV
Current Consumption	ISS	VIN=4.5V, No load		2.2	6.0	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	3.5V ≤ VIN ≤ 12V, IOUT=0.5mA		0.2		%/V
Input Voltage	VIN				12	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a}$	VIN=4.5V, IOUT=10mA 0°C < Ta < 70°C		±0.35		mV/°C

UTC UT1028 (+2.8V output type) ELECTRICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =4.8V, I _{OUT} =10mA ±2.4% ±5%	2.732 2.660	2.8 2.8	2.867 2.940	V
Output Current	I _{OUT}	V _{IN} =4.8V	20	30	-	mA
Load Regulation	ΔV _{OUT}	V _{IN} =4.8V, 1mA ≤ I _{OUT} ≤ 20mA		60	100	mV
Voltage Dropout	V _d	I _{OUT} =1mA		60		mV
Current Consumption	I _{SS}	V _{IN} =4.8V, No load		2.5	6.0	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	3.8V ≤ V _{IN} ≤ 12V, I _{OUT} =1mA		0.2		%/V
Input Voltage	V _{IN}				12	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a}$	V _{IN} =4.8V, I _{OUT} =10mA 0°C < T _a < 70°C		±0.4		mV/°C

UTC UT1030 (+3.0V output type) ELECTRICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =5V, I _{OUT} =10mA ±2.4% ±5%	2.928 2.850	3.0 3.0	3.072 3.150	V
Output Current	I _{OUT}	V _{IN} =5V	20	30	-	mA
Load Regulation	ΔV _{OUT}	V _{IN} =5V, 1mA ≤ I _{OUT} ≤ 20mA		60	100	mV
Voltage Dropout	V _d	I _{OUT} =1mA		60		mV
Current Consumption	I _{SS}	V _{IN} =5V, No load		2.5	6.0	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	4V ≤ V _{IN} ≤ 12V, I _{OUT} =1mA		0.2		%/V
Input Voltage	V _{IN}				12	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a}$	V _{IN} =5V, I _{OUT} =10mA 0°C < T _a < 70°C		±0.45		mV/°C

UTC UT1033 (+3.3V output type) ELECTRICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =5.5V, I _{OUT} =10mA ±2.4% ±5%	3.220 3.135	3.3 3.3	3.379 3.465	V
Output Current	I _{OUT}	V _{IN} =5.5V	20	30		mA
Load Regulation	ΔV _{OUT}	V _{IN} =5.5V, 1mA ≤ I _{OUT} ≤ 30mA		60	100	mV
Voltage Dropout	V _d	I _{OUT} =1mA		60		mV
Current Consumption	I _{SS}	V _{IN} =5.5V, No load		2.5	6.0	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	4.5V ≤ V _{IN} ≤ 12V, I _{OUT} =1mA		0.2		%/V
Input Voltage	V _{IN}				12	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a}$	V _{IN} =5.5V, I _{OUT} =10mA 0°C < T _a < 70°C		±0.5		mV/°C

UTC UT1036 (+3.6V output type) ELECTRICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =5.6V, I _{OUT} =10mA ±2.4% ±5%	3.513 3.420	3.6 3.6	3.686 3.780	V
Output Current	I _{OUT}	V _{IN} =5.6V	20	30		mA
Load Regulation	ΔV _{OUT}	V _{IN} =5.6V, 1mA ≤ I _{OUT} ≤ 30mA		60	100	mV
Voltage Dropout	V _d	I _{OUT} =1mA		60		mV
Current Consumption	I _{SS}	V _{IN} =5.6V, No load		3.0	7.0	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	4.6V ≤ V _{IN} ≤ 12V, I _{OUT} =1mA		0.2		%/V
Input Voltage	V _{IN}				12	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a}$	V _{IN} =5.6V, I _{OUT} =10mA 0°C < T _a < 70°C		±0.6		mV/°C

UTC UT1044 (+4.4V output type) ELECTRICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =6.4V, I _{OUT} =10mA ±2.4% ±5%	4.294 4.180	4.4 4.4	4.505 4.620	V
Output Current	I _{OUT}	V _{IN} =6.4V	20	30		mA
Load Regulation	ΔV _{OUT}	V _{IN} =6.4V, 1mA ≤ I _{OUT} ≤ 30mA		60	100	mV
Voltage Dropout	V _d	I _{OUT} =1mA		60		mV
Current Consumption	I _{SS}	V _{IN} =6.4V, No load		3.0	7.5	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	5.4V ≤ V _{IN} ≤ 12V, I _{OUT} =1mA		0.2		%/V
Input Voltage	V _{IN}				12	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a}$	V _{IN} =6.4V, I _{OUT} =10mA 0°C < T _a < 70°C		±0.7		mV/°C

UTC UT1050 (+5.0V output type) ELECTRICAL CHARACTERISTICS (Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =7V, I _{OUT} =10mA ±2.4% ±5%	4.88 4.75	5.0 5.0	5.12 5.25	V
Output Current	I _{OUT}	V _{IN} =7V	20	30		mA
Load Regulation	ΔV _{OUT}	V _{IN} =7V, 1mA ≤ I _{OUT} ≤ 30mA		60	100	mV
Voltage Dropout	V _d	I _{OUT} =1mA		60		mV
Current Consumption	I _{SS}	V _{IN} =7V, No load		3.5	9.0	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	6V ≤ V _{IN} ≤ 12V, I _{OUT} =1mA		0.2		%/V
Input Voltage	V _{IN}				12	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a}$	V _{IN} =7V, I _{OUT} =10mA 0°C < T _a < 70°C		±0.75		mV/°C

UTC UT1070 (+7.0V output type) ELECTRICAL CHARACTERISTICS (Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	$V_{IN}=9V, I_{OUT}=10mA$ $\pm 2.4\%$ $\pm 5\%$	6.832 6.65	7.0 7.0	7.168 7.35	V
Output Current	I_{OUT}	$V_{IN}=9V$	20	30		mA
Load Regulation	ΔV_{OUT}	$V_{IN}=9V, 1mA \leq I_{OUT} \leq 30mA$		60	100	mV
Voltage Dropout	V_d	$I_{OUT}=1mA$		60		mV
Current Consumption	I_{SS}	$V_{IN}=9V, \text{No load}$		5.0	12.5	μA
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$8V \leq V_{IN} \leq 12V, I_{OUT}=1mA$		0.2		%/V
Input Voltage	V_{IN}				12	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN}=9V, I_{OUT}=10mA$ $0^\circ C < T_a < 70^\circ C$		± 1.05		mV/°C

APPLICATION CIRCUIT

The basic circuits using the UT10XX series

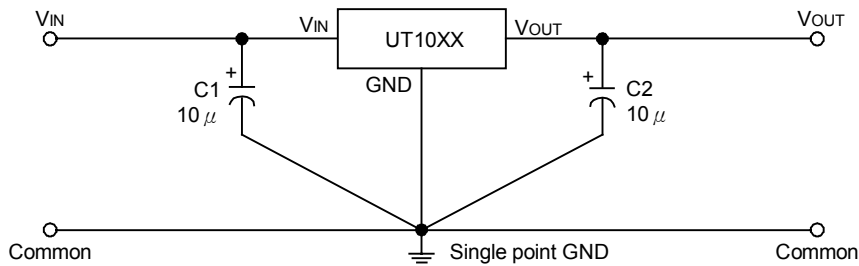

High output current positive voltage regulator

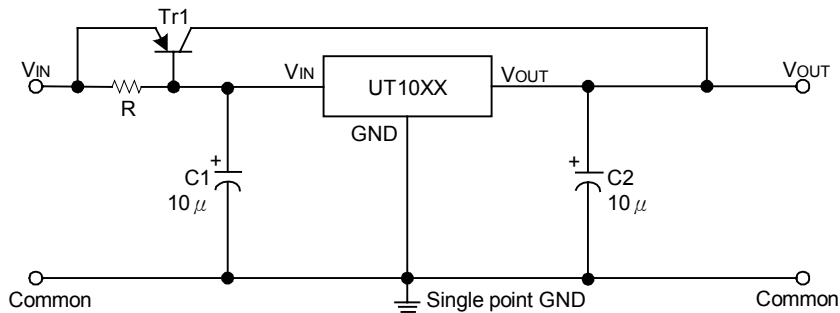


The diagram illustrates a single-point ground system. It features a power supply V_{IN} connected to a load consisting of a resistor R and a transistor $Tr1$. The output voltage is V_{OUT} . The ground connections are labeled: Common, Single point GND, and Common. Capacitors $C1$ and $C2$ are shown connected to the ground plane. The UT10XX component is connected to the ground plane.


The diagram shows a voltage divider circuit with a buffer. The input V_{IN} is connected to a $10\ \mu$ F capacitor $C1$. The other side of $C1$ is connected to the input of a buffer (UT10XX). The output of the buffer is V_{OUT} , which is connected to a voltage divider consisting of resistors $R1$ and $R2$. The output of the divider is V_{OUT} . The buffer's ground is connected to a 'Single point GND'. The input V_{IN} is also connected to a 'Common' ground.

UTC UNISONIC TECHNOLOGIES CO., LTD.

Circuit for increasing output voltage

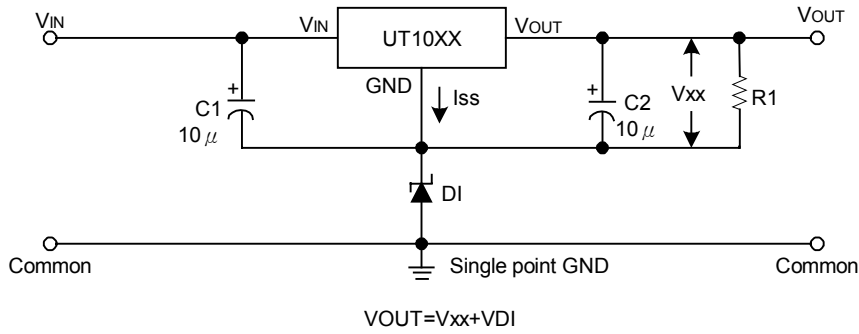

Constant current regulator

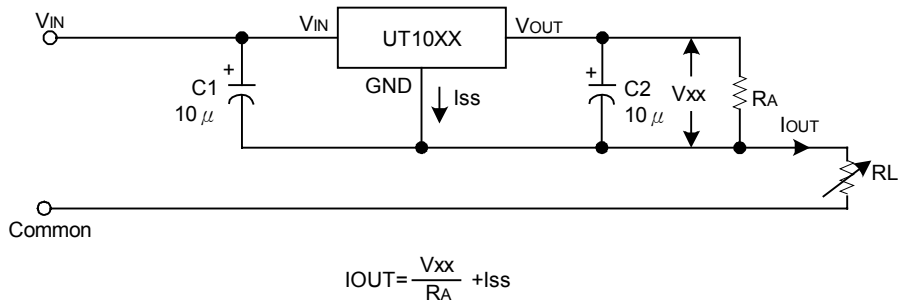

Dual supply

