

14 pin Dual-inLine Sine Wave VCXO

FEATURES

- **Sine Wave output VCXO**
- **Output 0dBm into 50Ω load, higher output available**
- **Harmonics < 20dBc**
- **Low current consumption**

DESCRIPTION

GS14 sine wave VCXOs provide a true sine wave out output. The VCXOs are packaged in the industry-standard 14 pin dual-in-line package. The VCXO is produced to close tolerances and has low current consumption.

SPECIFICATION

Frequency Range:	10.0MHz to 156.0MHz
Input Voltage:	+3.3±5% or +5.0VDC ±5%
Frequency Stability:	See table
Control Voltage Centre:	+1.65 VDC
Initial Frequency Accuracy:	±15ppm with Control V at +1.65VDC
Control Voltage Range:	+0.3V to +3.0VDC
Frequency Deviation Range:	±80ppm typical*
Output Wave Form:	True Sine Wave
Output Level:	0dBm into 50Ω load**
Harmonics:	<-20dBc
Phase Noise:	-140dBc/Hz at 10kHz offset
Current Consumption:	See table
Start-up Time:	6.0ms typical
Storage Temperature:	-50° to +100°C
Sub-Harmonics:	None
Ageing:	±5ppm per year maximum
Enable/Disable:	Not implemented - 4 pin package
RoHS Status:	Fully compliant or non-compliant

* Wider pulling range available

**** Higher output <5dBm available**

FREQUENCY STABILITY

Stability Code	Stability $\pm$ ppm	Temp. Range
A	25	0°~+70°C
B	50	0°~+70°C
C	100	0°~+70°C
D	25	-40°~+85°C
E	50	-40°~+85°C
F	100	-40°~+85°C


If non-standard frequency stability is required
Use 'I' followed by stability, i.e. I20 for $\pm 20\text{ppm}$

CURRENT CONSUMPTION

Frequency	Supply Voltage ($\pm 5\%$)	
	+3.3V	+5.0V
10MHz	9mA	18mA
100MHz	18mA	34mA
150MHz	19mA	36mA



OUTLINE & DIMENSIONS

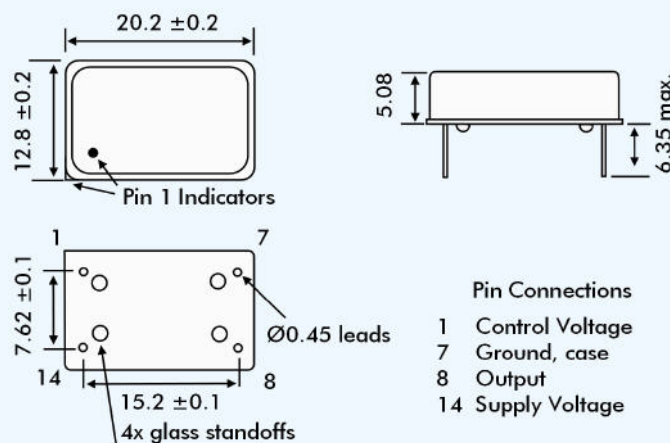

PART NUMBERING

Example: **3GS14G-A-80N-25.000**

Supply Voltage
3 = 3.3 Volts
5 = 5.0 Volts

Series Designation
GS14

RoHS Status
G = compliant
Blank = non-compliant

Frequency Stability
See table

Pull Range
±ppm

Pull Range Code
M = Maximum
N = Minimum
T = Typical

Frequency
MHz