




C 300/400 SERIES MONOLITHIC WIDEBAND CRT DISTORTION CORRECTION DEVICE

FEATURES

- 16 pin ceramic dip (C300 Series)
- Minimum of external components required
- Easily adjusts for yoke errors
- Accuracy better than 0.5% Max (C312)
- Bandwidth compatible with 10MHz systems
- Both geometry and focus available
- MIL 883C available
- Low cost

APPLICATIONS (for Vector Displays Only)

- Military Displays
 - HUDS
 - ATC
 - HDDS
 - PPI
- Simulators
 - Beam Penetration
 - Shadow mask
- Phototypesetting equipment
- Computer Output Microfilm displays
- Computer driven graphic displays
- Medical monitors
- CAD displays
- TV Cameras and projection systems

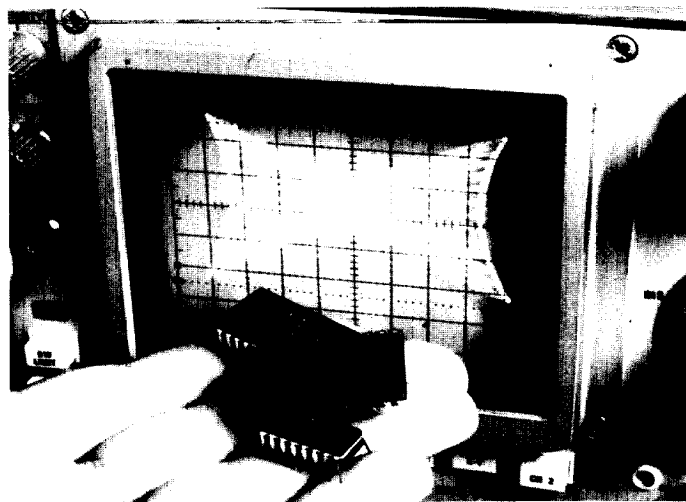

TRANSFER FUNCTION: GEOMETRY CORRECTION FOCUS CORRECTION


$$V_X = -x(x^2 + y^2)$$

$$V_Y = -y(x^2 + y^2)$$

$$V_F = -(x^2 + y^2)$$

PINOUT

H = HORIZONTAL
V = VERTICAL

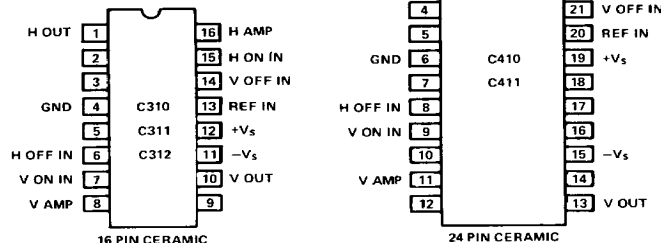


DESCRIPTION

The Intronics C300/400 Series are monolithic devices that accurately correct for geometric or focus distortion in CRT displays. The C300 (16 pin DIP) series provides wideband, accurate full face geometry or focus correction with few external components. These units connect between the horizontal and vertical inputs and their deflection amplifiers. Simple external adjustments provide for correction magnitude, horizontal/vertical keystone and curvature symmetry. The C400 series (24 pin DIP) is a full Mil temp range, -55°C to + 125°C device.

The principle of operation is based on circuitry which smoothly synthesizes a correction function that closely approximates the exact mathematical correction function.

TOP VIEW

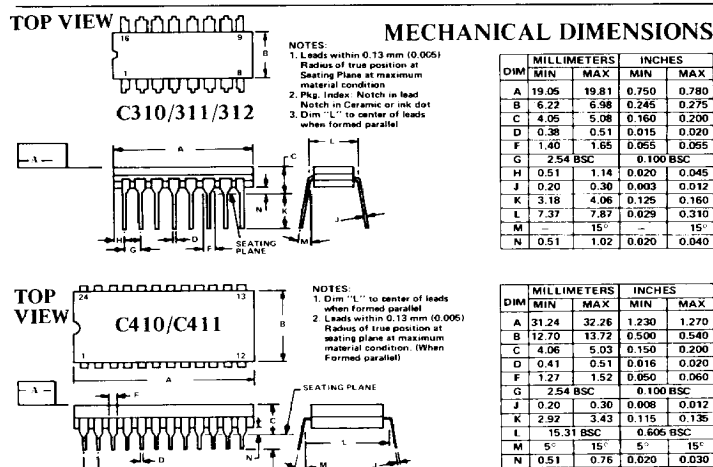

INTRONICS

C300/400 SERIES TECHNICAL SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS

SUPPLY VOLTAGE
(Between $V_S +$ and $V_S -$) 20V

OPERATING TEMPERATURE

C310 SERIES $-25^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$
C410 SERIES $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$

INTERNAL POWER DISSIPATION
700mW max
(includes external load resistors)

STORAGE TEMPERATURE

C310 SERIES $-25^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$
C410 SERIES $-55^{\circ}\text{C} \leq T_A \leq +150^{\circ}\text{C}$

PERFORMANCE SUMMARY (TYPICAL AT $+25^{\circ}\text{C}$, RATED SUPPLIES, TEST CIRCUIT FIG. 3($\pm 6\text{VDC}$),
UNLESS OTHERWISE NOTED

SPECIFICATIONS-GEOMETRY

Horizontal/Vertical
Correction Function
Output (for geometry configuration)
Horizontal Output
Vertical Output

C310 SERIES
C310/C311/C312

C410 SERIES
C410/C411

Bandwidth
Correction only
Resulting corrected signal

1V F.S.
1V F.S.

2MHZ Min. See note (1)
6MHZ Min.

1V F.S.
1V F.S.

2MHZ Min. See note (1)
6MHZ Min.

Slew Rate
Correction only
Resulting corrected signal

15V/ μs
120V/ μs

15V/ μs
120V/ μs

Settling Time To 1%
Correction only
Resulting corrected signal

300ns
2 μs

300ns
2 μs

Delay Time
Offset Temperature
Stability

50ns
50 $\mu\text{V}/^{\circ}\text{C}$

50ns
50 $\mu\text{V}/^{\circ}\text{C}$

Output Resistance
Accuracy

40 Ω Max

40 Ω Max

FIG. 1

Resulting Accuracy
of Corrected Function
by total deflection angle
(test circuit Fig. 3)

	Uncorrected	C310	C311	C312	C410	C411	
20°	1.5	.30	.15	.08	.15	.08	% Max
30°	3.5	.68	.34	.17	.34	.17	% Max
40°	6.4	1.24	.62	.31	.62	.31	% Max
50°	10.3	2.00	1.00	.50	1.00	.50	% Max
60°	15.5	3.00	1.50	.75	1.50	.75	% Max
70°	22.0	4.28	2.14	1.07	2.14	1.07	% Max
80°	31.0	6.00	3.00	1.50	3.00	1.50	% Max

SPECIFICATIONS-FOCUS (FIG.5)

Bandwidth
Slew Rate
Horizontal Output
Vertical Output
Offset Temperature
Stability
Output resistance
Accuracy

2MHZ Min.
15V/ μs
-1.00V F.S.
-1.00V F.S.
50 $\mu\text{V}/^{\circ}\text{C}$

2MHZ Min.
15V/ μs
-1.00V F.S.
-1.00V F.S.
50 $\mu\text{V}/^{\circ}\text{C}$

40 Ω Max

40 Ω Max

Horizontal
Vertical

2% F.S.
2% F.S.

2% F.S.
2% F.S.

SPECIFICATIONS-GENERAL

Transfer Function
Geometry
Horizontal
Vertical
Focus
Horizontal
Vertical
Temperature Range for full rated performance
Rated Specifications
Storage
Power Supply ($\pm V_S$)
Quiescent Current

$-x(x^2 + y^2)$
 $-y(x^2 + y^2)$

 $-x^2$
 $-y^2$

$-x(x^2 + y^2)$
 $-y(x^2 + y^2)$

 $-x^2$
 $-y^2$


0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$
-25 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$
±6V
32mA typical

-40 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$
-55 $^{\circ}\text{C}$ to +150 $^{\circ}\text{C}$
±6V
32mA typical

NOTE 1. For wide bandwidth use Intronic A504

TYPICAL APPLICATION CIRCUIT (C310); GEOMETRY CORRECTION

FIG. 2

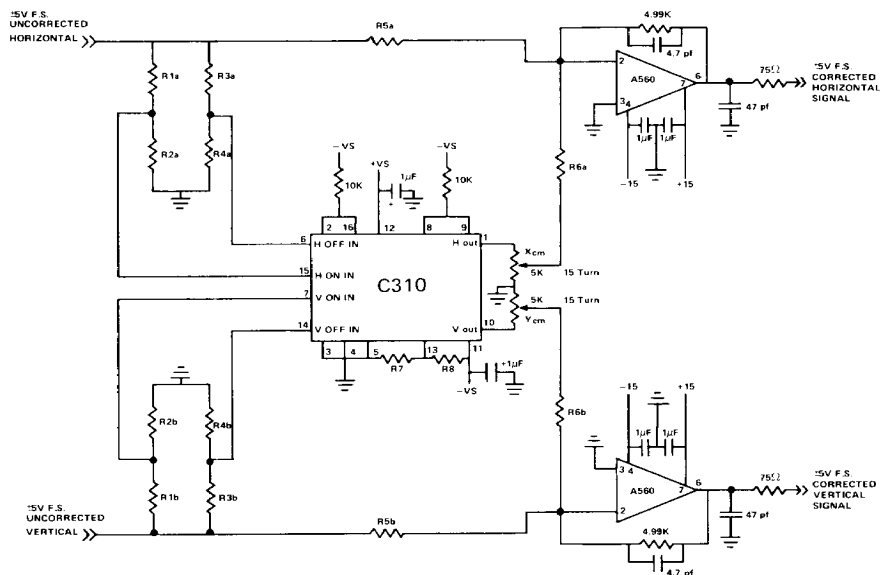


NOTE: 1. The circuit shown is a typical configuration to correct for 'pincushion' distortion.
2. Only 2 potentiometers (Xcm and Ycm) are required for 2% FS accuracy (50° full angle deflection).

C310 ADJUSTMENT PROCEDURE

1. Adjust Horizontal Correction Magnitude potentiometer for optimonly straight vertical lines.
2. Adjust Vertical Correction Magnitude potentiometer for optimonly straight horizontal lines.

TYPICAL APPLICATION CIRCUIT C311, 312, 410, 411; GEOMETRY CORRECTION

FIG. 3

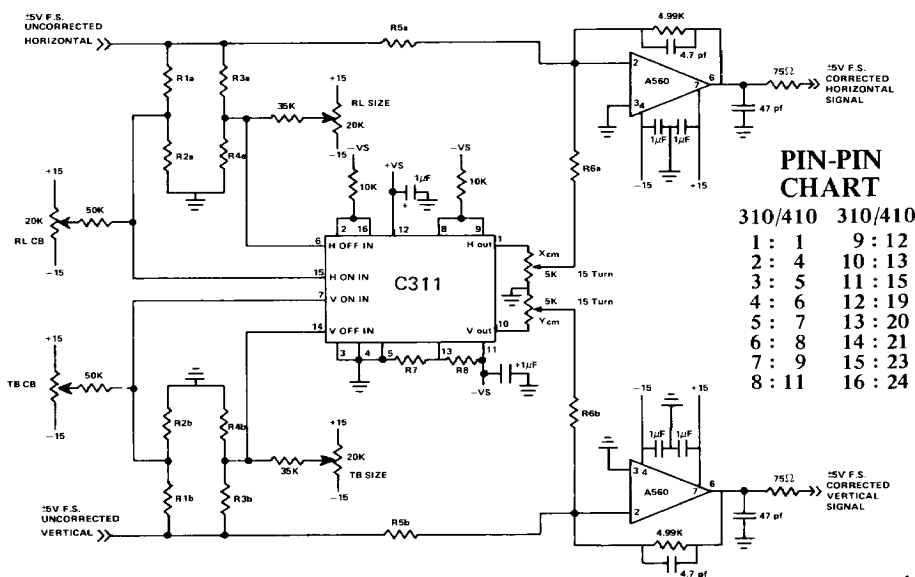

C311, 312, 410, 411

1. Adjust Horizontal Correction Magnitude potentiometer for optimonly straight vertical lines.
2. Adjust Vertical Correction Magnitude potentiometer for optimonly straight horizontal lines.
3. Adjust right/left curvature balance potentiometer for optimonly straight vertical "On-Axis" line.
4. Adjust top/bottom curvature balance potentiometer for optimonly straight horizontal "On-Axis" line.
5. Adjust right/left size potentiometer until right side is same size as left side.
6. Adjust top/bottom size potentiometer until top is same size as bottom.
7. Repeat steps 1-6 until desired accuracy is obtained.

Note: C311 is shown. For C410-411 refer to pin-pin chart to determine correct pin designations.

FIG. 4


COMPONENT VALUES (K OHM) FOR ±5V FULL SCALE INPUT AND OUTPUT
NOTE: VALUES SHOWN ARE CALCULATED-TOLERANCE RECOMMENDED ±5%

TOTAL DEFLECTION	R1	R2	R3	R4	R5	R6	R7	R8
20°	2.1K	.4K	2K	.475K	4.92K	20K	.13K	1.07K
30°	2.1K	.4K	2.05K	.45K	4.83K	20K	.20K	1.0K
40°	2.1K	.4K	2.1K	.425K	4.69K	10K	.26K	.94K
50°	2.1K	.4K	2.1K	.425K	4.53K	5K	.32K	.88K
60°	2.1K	.4K	2.1K	.425K	4.33K	4K	.36K	.84K
70°	2.1K	.4K	2.1K	.425K	4.09K	3K	.39K	.81K
80°	2.1K	.4K	2.1K	.425K	3.83K	2K	.42K	.78K
90°	2.1K	.4K	2.1K	.425K	3.53K	1.5K	.46K	.77K

**RESULTING INPUT LEVELS VERSUS DEFLECTION ANGLES,
TO BE USED FOR OTHER FULL SCALE INPUT LEVELS.**

TOTAL DEFLECTION	HORIZONTAL/VERTICAL ON AXIS INPUTS	HORIZONTAL/VERTICAL OFF AXIS INPUTS	REF IN
20°	.8V PEAK F.S.	.95V PEAK F.S.	— .65V
30°	.8V PEAK F.S.	.90V PEAK F.S.	—1.00V
40°	.8V PEAK F.S.	.85V PEAK F.S.	—1.30V
50°	.8V PEAK F.S.	.85V PEAK F.S.	—1.60V
60°	.8V PEAK F.S.	.85V PEAK F.S.	—1.80V
70°	.8V PEAK F.S.	.85V PEAK F.S.	—1.95V
80°	.8V PEAK F.S.	.85V PEAK F.S.	—2.10V
90°	.8V PEAK F.S.	.85V PEAK F.S.	—2.20V

TYPICAL APPLICATION CIRCUIT - FOCUS

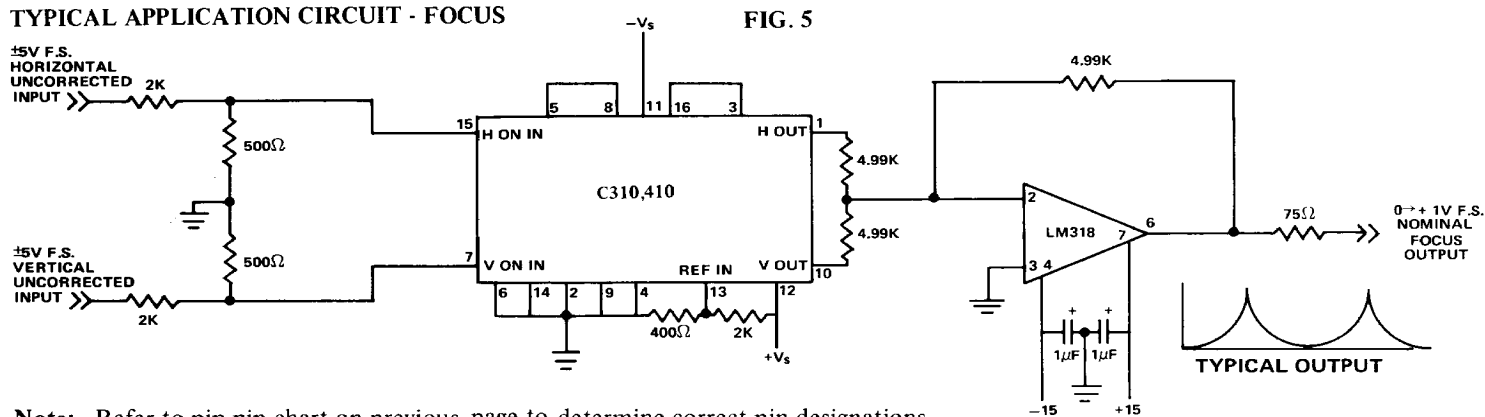

Note: Refer to pin-pin chart on previous page to determine correct pin designations.
Pins shown above are for C300 series.

NOTES:

- IF WIDER BANDWIDTH IS DESIRED USE INTRONICS A560 OR A504 IN PLACE OF LM318.

RESULTING CORRECTED SIGNAL

	LM318	A504
BANDWIDTH	2MHz	10MHz
SLEW RATE	10V/μs	200V/μs
SETTLING TO 1%	1μs	100ns

- WHEN USING C410, 411 DELETE R7 AND USE THE FOLLOWING VALUES:


20°	750*Ω//156Ω±10%
30°	750*Ω//270Ω±10%
40°	750*Ω//392Ω±10%
50°	750*Ω//547Ω±10%
60°	750*Ω//676Ω±10%
70°	750*Ω//790Ω±10%
80°	750*Ω//924Ω±10%
90°	750*Ω//1142Ω±10%

* 3600 PPM wire wound resistor (Available from KRL Electronics or equivalent).

OFF AXIS AND NON-ORTHOGONAL GUNS

IF THE ADJUSTMENTS DETAILED ABOVE WERE NOT SUFFICIENT TO CORRECT FOR SYSTEM ERRORS BECAUSE A GUN IS OFF AXIS IN EXCESS OF 5° OR NOT 90° WITH RESPECT TO THE OTHER, CALL OR WRITE FOR APPLICATION NOTES. THESE ERRORS CAN BE CORRECTED EASILY WITH THE C310 OR C410 SERIES.

FIG. 6

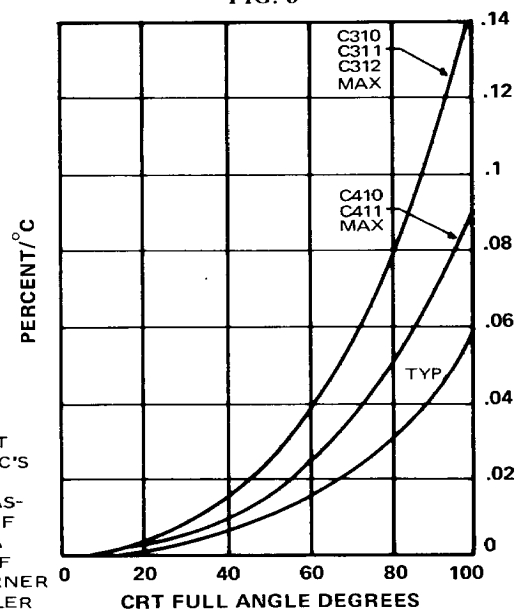

57 Chapel Street, Newton, MA 02158, (617) 964-4000, TWX 710-335-6835, TELEX 200095, FAX (617) 527-3310