

REVERSE VOLTAGE - **50 to 1000**Volts
FORWARD CURRENT - **2.0** Amperes

2GBJ

- [illegible]

Dimensions in inches and (millimeters)

Rating at 25°C ambient temperature unless otherwise specified.

Resistive or inductive load, 60HZ.

For capacitive load, derate current by 20%

[illegible]



FIG.1- DERATING CURVE
OUTPUT RECTIFIED CURRENT

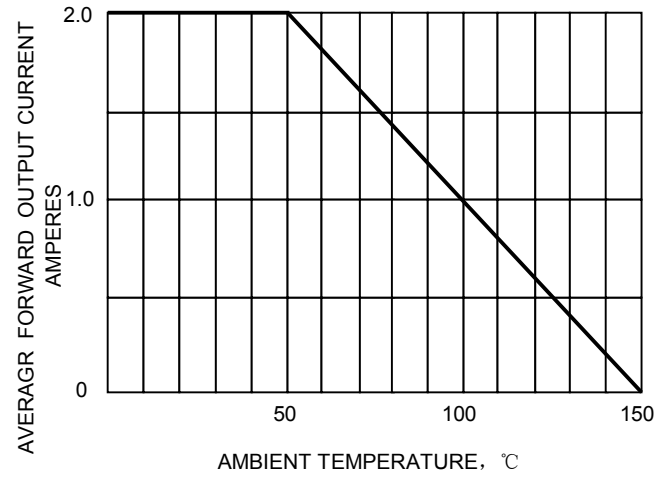


FIG.2-TYPICAL FORWARD
CHARACTERISTICS

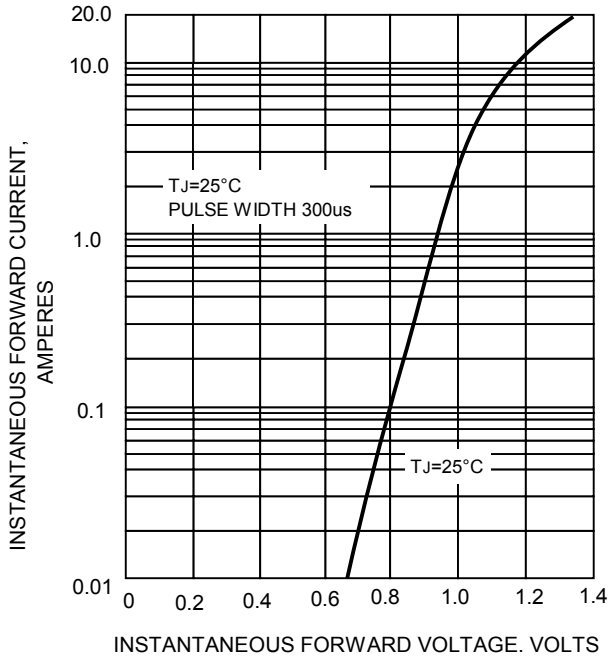


FIG.3-TYPICAL REVERSE
CHARACTERISTICS

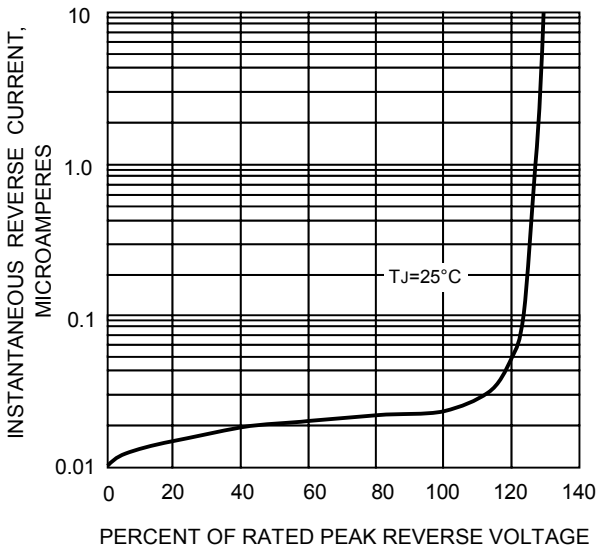


FIG.4-MAXIMUM FORWARD SURGE CURRENT

