



**BUX48B/V48B/V48BFI**  
**BUX48C/V48C/V48CFI**


SGS-THOMSON

3DE D


## HIGH VOLTAGE POWER SWITCHING

### DESCRIPTION

The BUX48B/C, BUV48B/C and BUV48BFI/CFI are silicon multiepitaxial mesa NPN transistors mounted respectively in TO-3 metal case, TO-218 plastic package and ISOWATT218 fully isolated package. They are particularly intended for switching and industrial applications from single and three-phase mains.

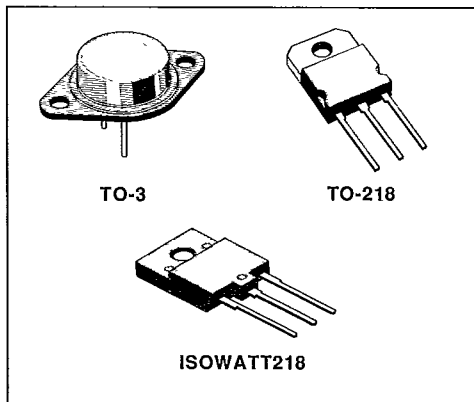

### INTERNAL SCHEMATIC DIAGRAM



### ABSOLUTE MAXIMUM RATINGS

| Symbol    | Parameter                                                 | Value                        |                              |             | Unit       |
|-----------|-----------------------------------------------------------|------------------------------|------------------------------|-------------|------------|
|           |                                                           | BUX48B<br>BUV48B<br>BUV48BFI | BUX48C<br>BUV48C<br>BUV48CFI |             |            |
| $V_{CEr}$ | Collector-emitter Voltage ( $R_{BE} = 10\Omega$ )         | 1200                         | 1200                         |             | V          |
| $V_{CES}$ | Collector-emitter Voltage ( $V_{BE} = 0$ )                | 1200                         | 1200                         |             | V          |
| $V_{CEO}$ | Collector-emitter Voltage ( $I_B = 0$ )                   | 600                          | 700                          |             | V          |
| $V_{EBO}$ | Emitter-base Voltage ( $I_C = 0$ )                        | 7                            |                              |             | V          |
| $I_C$     | Collector Current                                         | 15                           |                              |             | A          |
| $I_{CM}$  | Collector Peak Current ( $t_p < 5ms$ )                    | 30                           |                              |             | A          |
| $I_{CP}$  | Collector Peak Current non Repetitive ( $t_p < 20\mu s$ ) | 55                           |                              |             | A          |
| $I_B$     | Base Current                                              | 4                            |                              |             | A          |
| $I_{BM}$  | Base Peak Current ( $t_p < 5ms$ )                         | 20                           |                              |             | A          |
|           |                                                           | TO-3                         | TO-218                       | ISOWATT218  |            |
| $P_{tot}$ | Total Dissipation at $T_c < 25^\circ C$                   | 175                          | 125                          | 65          | W          |
| $T_{stg}$ | Storage Temperature                                       | - 65 to 200                  | - 65 to 150                  | - 65 to 150 | $^\circ C$ |
| $T_j$     | Max. Operating Junction Temperature                       | 200                          | 150                          | 150         | $^\circ C$ |

THERMAL DATA

|                  |                                      | TO-3 | TO-218 | ISOWATT218 |      |
|------------------|--------------------------------------|------|--------|------------|------|
| $R_{th\ j-case}$ | Thermal Resistance Junction-case max | 1    | 1      | 1.92       | °C/W |

ELECTRICAL CHARACTERISTICS
 ( $T_{case} = 25\text{ °C}$  unless otherwise specified)

| Symbol           | Parameter                                                         | Test Conditions                                                                   | Min.       | Typ. | Max.     | Unit                |
|------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------|------|----------|---------------------|
| $I_{CER}$        | Collector Cutoff Current<br>( $R_{BE} = 10\ \Omega$ )             | $V_{CE} = 1200\text{ V}$<br>$V_{CE} = 1200\text{ V}$ $T_{case} = 125\text{ °C}$   |            |      | 500<br>4 | $\mu\text{A}$<br>mA |
| $I_{CES}$        | Collector Cutoff Current<br>( $V_{BE} = 0$ )                      | $V_{CE} = 1200\text{ V}$<br>$V_{CE} = 1200\text{ V}$ $T_{case} = 125\text{ °C}$   |            |      | 500<br>3 | $\mu\text{A}$<br>mA |
| $I_{CEO}$        | Collector Cutoff Current<br>( $I_B = 0$ )                         | $V_{CE} = V_{CEO}$                                                                |            |      | 1        | mA                  |
| $I_{EBO}$        | Emitter Cutoff Current<br>( $I_C = 0$ )                           | $V_{EB} = 6\text{ V}$                                                             |            |      | 1        | mA                  |
| $V_{CEO(sus)}^*$ | Collector-emitter Sustaining<br>Voltage ( $I_B = 0$ )             | $I_C = 100\text{ mA}$<br>for BUX48B/BUV48B/BUV48BFI<br>for BUX48C/BUV48C/BUV48CFI | 600<br>700 |      |          | V                   |
| $V_{CER(sus)}^*$ | Collector-emitter Sustaining<br>Voltage ( $R_{BE} = 10\ \Omega$ ) | $I_C = 0.5\text{ A}$<br>$L = 2\text{ mH}$ $V_{clamp} = 1200\text{ V}$             | 1200       |      |          | V                   |
| $V_{CE(sat)}^*$  | Collector-emitter Saturation<br>Voltage                           | $I_C = 6\text{ A}$ $I_B = 1.5\text{ A}$                                           |            |      | 1.5      | V                   |
|                  |                                                                   | $I_C = 10\text{ A}$ $I_B = 4\text{ A}$                                            |            |      | 3        | V                   |
| $V_{BE(sat)}^*$  | Base-emitter Saturation<br>Voltage                                | $I_C = 6\text{ A}$ $I_B = 1.5\text{ A}$                                           |            |      | 1.5      | V                   |
|                  |                                                                   | $I_C = 10\text{ A}$ $I_B = 4\text{ A}$                                            |            |      | 2        | V                   |

\* Pulsed : pulse duration = 300  $\mu\text{s}$ , duty cycle = 1.5 %.

RESISTIVE SWITCHING TIMES

S G S-THOMSON

30E D

| Symbol   | Parameter    | Test Conditions                                                                 | Min. | Typ. | Max. | Unit          |
|----------|--------------|---------------------------------------------------------------------------------|------|------|------|---------------|
| $t_{on}$ | Turn-on Time | $V_{CC} = 250\text{ V}$ $I_C = 6\text{ A}$<br>$I_{B1} = -I_{B2} = 1.5\text{ A}$ |      | 0.5  | 1    | $\mu\text{s}$ |
| $t_s$    | Storage Time |                                                                                 |      | 1.5  | 3    | $\mu\text{s}$ |
| $t_f$    | Fall Time    |                                                                                 |      | 0.2  | 0.7  | $\mu\text{s}$ |



INDUCTIVE SWITCHING TIMES

| Symbol | Parameter    | Test Conditions                                                                                          | Min. | Typ. | Max. | Unit          |
|--------|--------------|----------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $t_s$  | Storage Time | $V_{CC} = 250\text{ V}$ $I_C = 6\text{ A}$<br>$I_{B1} = -I_{B2} = 1.5\text{ A}$                          |      | 2    |      | $\mu\text{s}$ |
| $t_f$  | Fall Time    |                                                                                                          |      | 0.15 |      | $\mu\text{s}$ |
| $t_s$  | Storage Time | $V_{CC} = 250\text{ V}$ $I_C = 6\text{ A}$<br>$I_{B1} = -I_{B2} = 1.5\text{ A}$<br>$T_C = 125\text{ °C}$ |      | 3    | 6    | $\mu\text{s}$ |
| $t_f$  | Fall Time    |                                                                                                          |      | 0.33 | 0.60 | $\mu\text{s}$ |

7929237 0029003 4

Safe Operating Areas (TO-3).

Safe Operating Areas (TO-218, ISOWATT218).

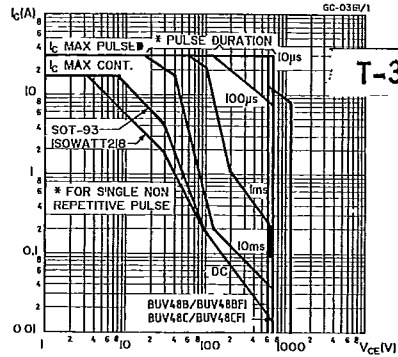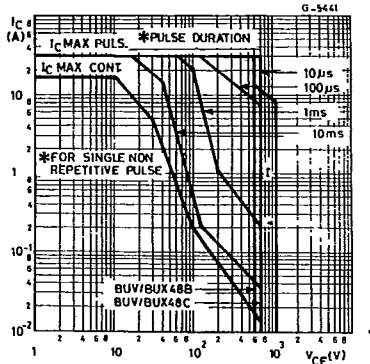


I - Area of permissible operation during turn-on provided  $R_{BE} \leq 100 \Omega$  and  $t_p \leq 0.2 \mu s$ .


SGS-THOMSON

30E D


DC Current Gain.

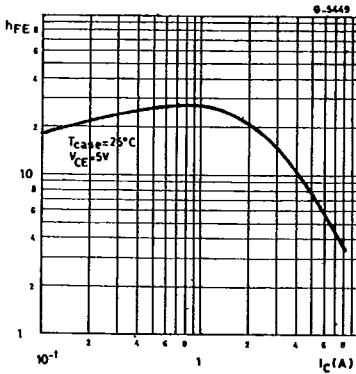


Collector-emitter Saturation Voltage.

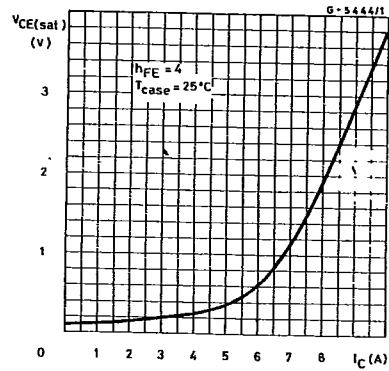

Collector Current Spread vs. Base Emitter Voltage.

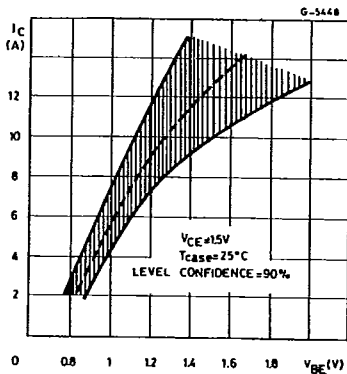



Minimum Bias Current  $I_{BD}$  to Saturate the Discrete darlington.

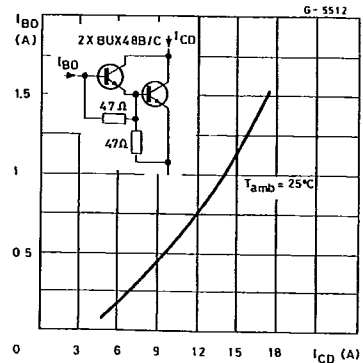

7929237 0029004 6



Minimum Base Current  $I_{BD}$  to Saturate the Discrete Darlington.

DC Current Gain for Darlington Configuration (see fig. 1).

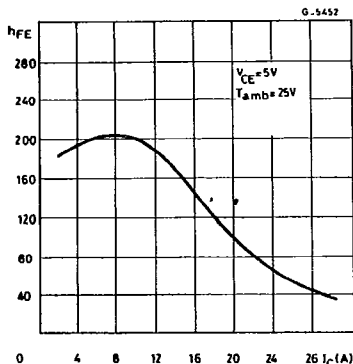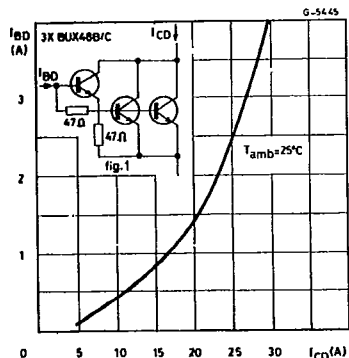



Switching Times Resistive Load.

Switching Times Percentage Variation vs. Case Temperature.

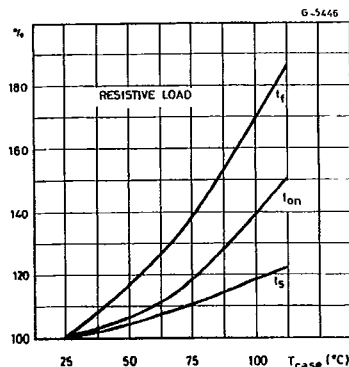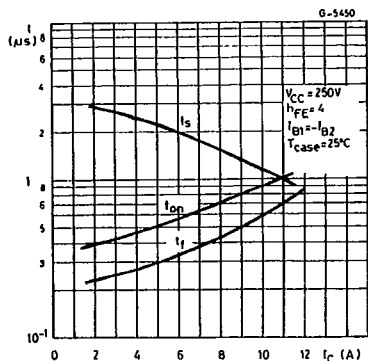

Switching Times Inductive Load.

Switching Times Percentage Variation vs. Case Temperature.

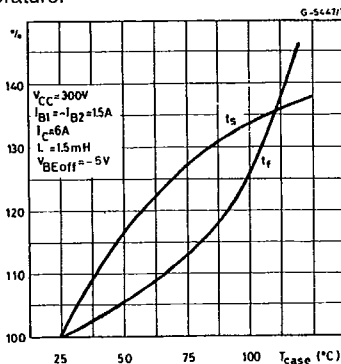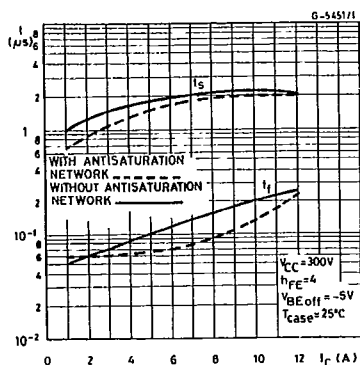

S G S-THOMSON



30E D

7929237 0029005

T-33-15

Forward Biased Accidental Overload Area.


Clamped Reverse Biased Safe Operating.

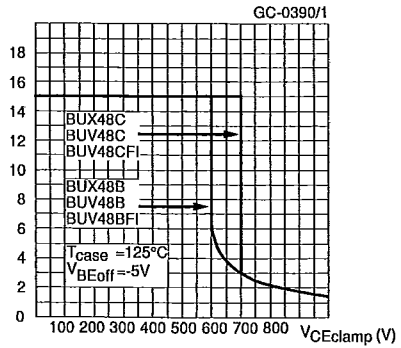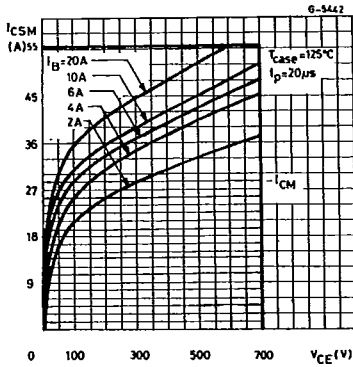


# TEST CIRCUITS

SGS-THOMSON

30E D

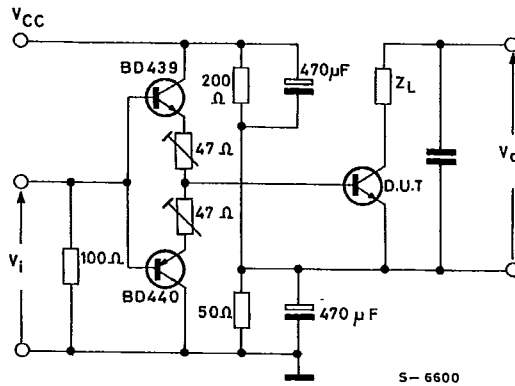

S-6600

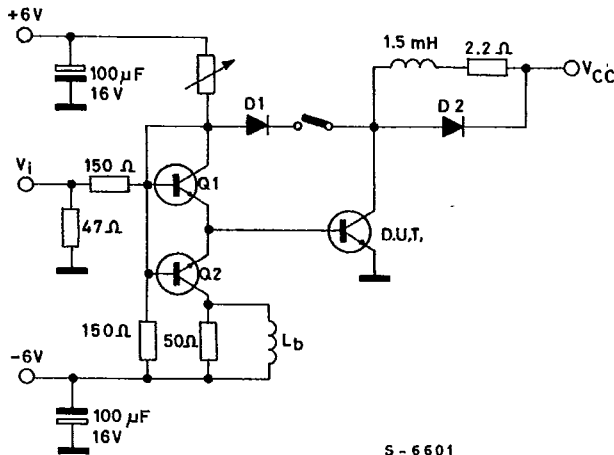

S-6601

## ISOWATT218 PACKAGE CHARACTERISTICS AND APPLICATION

ISOWATT218 is fully isolated to 4000V dc. Its thermal impedance, given in the data sheet, is optimised to give efficient thermal conduction together with excellent electrical isolation. The structure of the case ensures optimum distances between the pins and heatsink. These distances are in agreement with VDE and UL creepage and clearance standards. The ISOWATT218 package eliminates the need for external isolation so reducing fixing hardware.

The package is supplied with leads longer than the standard TO-218 to allow easy mounting on pcbs.

Accurate moulding techniques used in manufacture assures consistent heat spreader-to-heatsink capacitance.

ISOWATT218 thermal performance is equivalent to that of the standard part, mounted with a 0.1mm mica washer. The thermally conductive plastic has a higher breakdown rating and is less fragile than mica or plastic sheets. Power derating for ISOWATT218 packages is determined by :

$$P_D = \frac{T_J - T_C}{R_{th}}$$

## THERMAL IMPEDANCE OF ISOWATT218 PACKAGE

Figure 1 illustrates the elements contributing to the thermal resistance of a transistor heatsink assembly, using ISOWATT218 package.

The total thermal resistance  $R_{th(tot)}$  is the sum of each of these elements. The transient thermal impedance,  $Z_{th}$  for different pulse durations can be estimated as follows :

1 - For a short duration power pulse of less than 1ms :

$$Z_{th} < R_{thJ-C}$$

2 - For an intermediate power pulse of 5ms to 50ms seconds :


$$Z_{th} = R_{thJ-C}$$

3 - For long power pulses of the order of 500ms seconds or greater :

$$Z_{th} = R_{thJ-C} + R_{thC-HS} + R_{thHS-amb}$$

It is often possible to discern these areas on transient thermal impedance curves.

Figure 1.



SGS-THOMSON

30E D