



BUF410/410I
BUF410A/410AI

S G S-THOMSON

30E D

FASTSWITCH EASY-TO-DRIVE (ETD) NPN TRANSISTORS

PRELIMINARY DATA

- HIGH SWITCHING SPEED NPN POWER TRANSISTOR
- EASY TO DRIVE
- HIGH VOLTAGE FOR OFF-LINE APPLICATIONS
- 100KHz SWITCHING SPEED
- LOW COST DRIVE CIRCUITS
- LOW DYNAMIC SATURATION

industrial and professional power driving applications such as motor drives and off-line switching power supplies. ETD transistors will operate using easy drive circuits at up to 100KHz ; this helps to simplify designs and improve reliability. The superior switching performance and low crossover losses reduce dissipation and consequently lower the equipment operating temperature. These ETD transistors are suitable for applications in high reliability medium power motors drives and half bridge and full bridge converters.


These Easy-to-Drive FASTSWITCH transistors are available in TO-218 and TO-3 packages. Additionally, the alumina isolated version is available in the TOP-3I package.

APPLICATIONS


- SMPS
- MOTOR DRIVES

DESCRIPTION


These Easy-to-Drive FASTSWITCH NPN power transistors are specially designed for high reliability



TO-218



TO-3



TOP-3I

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	TO-218 TOP-3I	Value		Unit
			BUF410 BUF410I	BUF410A BUF410AI	
V_{CEV}	Collector-emitter Voltage ($V_{BE} \approx -1.5V$)		850	1000	V
V_{CEO}	Collector-emitter Voltage ($I_B = 0$)		450		V
V_{EBO}	Emitter-base Voltage ($I_C = 0$)		7		V
I_C	Collector Current		15		A
I_{CM}	Collector Peak Current		30		A
I_B	Base Current		3		A
I_{BM}	Base Peak Current		4.5		A
			TO-218	TOP-3I	
P_{tot}	Total Dissipation at $T_c < 25^\circ C$		125	85	W
T_{stg}	Storage Temperature		- 65 to 150		$^\circ C$
T_J	Max. Operating Junction Temperature		150		$^\circ C$

THERMAL DATA

S G S-THOMSON

30E D

		TO-218	TOP-3I	
$R_{thj-case}$	Thermal Resistance Junction-case	Max	1	1.47
				°C/W

T-33-13

ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CER}	Collector Cutoff Current ($R_{BE} = 10\Omega$)	$V_{CE} = V_{CEV}$ $V_{CE} = V_{CEV}$ $T_o = 100^\circ\text{C}$			0.2 1	mA mA
I_{CEV}	Collector Cutoff Current	$V_{CE} = V_{CEV}$ $V_{BE} = -1.5\text{V}$ $V_{CE} = V_{CEV}$ $V_{BE} = -1.5\text{V}$ $T_o = 100^\circ\text{C}$			0.2 1	mA mA
I_{EBO}	Emitter Cutoff Current ($I_C = 0$)	$V_{EB} = 5\text{V}$			1	mA
$V_{CEO(sus)}^*$	Collector Emitter Sustaining Voltage	$I_C = 0.2\text{A}$ $L = 25\text{mH}$	450			V
V_{EBO}	Emitter-base Voltage ($I_C = 0$)	$I_E = 50\text{mA}$	7			V
$V_{CE(sat)}^*$	Collector-emitter Saturation Voltage	$I_C = 5\text{A}$ $I_B = 0.5\text{A}$ $I_C = 5\text{A}$ $I_B = 0.5\text{A}$ $T_o = 100^\circ\text{C}$ $I_C = 10\text{A}$ $I_B = 2\text{A}$ $I_C = 10\text{A}$ $I_B = 2\text{A}$ $T_o = 100^\circ\text{C}$		0.8 0.5	2.8 2	V V V V
$V_{BE(sat)}^*$	Base-emitter Saturation Voltage	$I_C = 5\text{A}$ $I_B = 0.5\text{A}$ $I_C = 5\text{A}$ $I_B = 0.5\text{A}$ $T_o = 100^\circ\text{C}$ $I_C = 10\text{A}$ $I_B = 2\text{A}$ $I_C = 10\text{A}$ $I_B = 2\text{A}$ $T_o = 100^\circ\text{C}$		0.9 1.1	1.5 1.5	V V V V
di_c/dt	Rate of Rise of on-state Collector Current	$V_{CC} = 300\text{V}$ $R_C = 0$ $t_p = 3\mu\text{s}$ $I_{B1} = 0.75\text{A}$ $T_j = 25^\circ\text{C}$ $I_{B1} = 0.75\text{A}$ $T_j = 100^\circ\text{C}$ $I_{B1} = 3\text{A}$ $T_j = 100^\circ\text{C}$	45 100	60		A/ μs A/ μs A/ μs
$V_{CE(3\mu\text{s})}$	Collector-emitter Dynamic Voltage	$V_{CC} = 300\text{V}$ $R_C = 60\Omega$ $I_{B1} = 0.75\text{A}$ $T_j = 25^\circ\text{C}$ $T_j = 100^\circ\text{C}$		2.1	8	V V
$V_{CE(5\mu\text{s})}$	Collector-emitter Dynamic Voltage	$V_{CC} = 300\text{V}$ $R_C = 60\Omega$ $I_{B1} = 0.75\text{A}$ $T_j = 25^\circ\text{C}$ $T_j = 100^\circ\text{C}$		1.1	4	V V
t_s t_f t_c	Storage Time Fall Time Cross Over Time	$I_C = 5\text{A}$ $V_{CC} = 50\text{V}$ $V_{BB} = -5\text{V}$ $R_{BB} = 1.2\Omega$ $V_{clamp} = 400\text{V}$ $I_{B1} = 0.5\text{A}$ $L = 0.5\text{mH}$		0.8 0.05 0.08		μs μs μs
t_s t_f t_c	Storage Time Fall Time Cross Over Time	$I_C = 5\text{A}$ $V_{CC} = 50\text{V}$ $V_{BB} = -5\text{V}$ $R_{BB} = 1.2\Omega$ $V_{clamp} = 400\text{V}$ $I_{B1} = 0.5\text{A}$ $L = 0.5\text{mH}$ $T_j = 100^\circ\text{C}$			1.8 0.1 0.18	μs μs μs
V_{CEW}	Maximum Collector Emitter Voltage without Snubber	$I_C = 5\text{A}$ $V_{CC} = 50\text{V}$ $V_{BB} = -5\text{V}$ $R_{BB} = 1.2\Omega$ $V_{clamp} = 400\text{V}$ $I_{B1} = 0.5\text{A}$ $L = 0.5\text{mH}$ $T_j = 125^\circ\text{C}$	500			V
t_s t_f t_c	Storage Time Fall Time Cross Over Time	$I_C = 5\text{A}$ $V_{CC} = 50\text{V}$ $V_{BB} = 0$ $R_{BB} = 0.3\Omega$ $V_{clamp} = 400\text{V}$ $I_{B1} = 0.5\text{A}$ $L = 0.5\text{mH}$		1.5 0.04 0.07		μs μs μs


SGS-THOMSON

3DE D

ELECTRICAL CHARACTERISTICS (continued)


Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
t_s t_f t_c	Storage Time Fall Time Cross Over Time	$I_C = 5A$ $V_{BB} = 0$ $V_{clamp} = 400V$ $L = 0.5mH$	$V_{CC} = 50V$ $R_{BB} = 0.3\Omega$ $I_{B1} = 0.5A$ $T_j = 100^\circ C$			3 0.15 0.25	μs μs μs
V_{CEW}	Maximum Collector Emitter Voltage without Snubber	$I_C = 5A$ $V_{BB} = 0$ $V_{clamp} = 400V$ $L = 0.5mH$	$V_{CC} = 50V$ $R_{BB} = 0.3\Omega$ $I_{B1} = 0.5A$ $T_j = 125^\circ C$	500			V
T-33-13							
t_s t_f t_c	Storage Time Fall Time Cross Over Time	$I_C = 10A$ $V_{BB} = -5V$ $V_{clamp} = 400V$ $L = 0.25mH$	$V_{CC} = 50V$ $R_{BB} = 1.2\Omega$ $I_{B1} = 2A$		1.9 0.06 0.12		μs μs μs
t_s t_f t_c	Storage Time Fall Time Cross Over Time	$I_C = 10A$ $V_{BB} = -5V$ $V_{clamp} = 400V$ $L = 0.25mH$	$V_{CC} = 50V$ $R_{BB} = 1.2\Omega$ $I_{B1} = 2A$ $T_j = 100^\circ C$			3.2 0.12 0.3	μs μs μs
V_{CEW}	Maximum Collector Emitter Voltage without Snubber	$I_{CWOFF} = 15A$ $V_{BB} = -5V$ $L = 0.17mH$ $T_j = 125^\circ C$	$I_{B1} = 3A$ $V_{CC} = 50V$ $R_{BB} = 1.2\Omega$	400			V

Turn-on Switching Test Circuit.

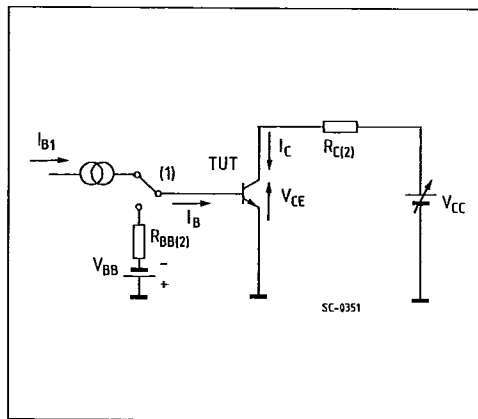

- (1) Fast electronic switch
(2) Non-inductive Resistor



Turn-off Switching Test Circuit.

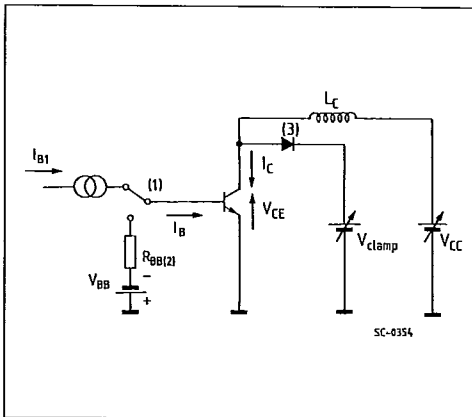


- (1) Fast electronic switch
(2) Non-inductive Resistor
(3) Fast recovery rectifier

Turn-on Switching Test Waveforms. S G S-THOMSON


30E D

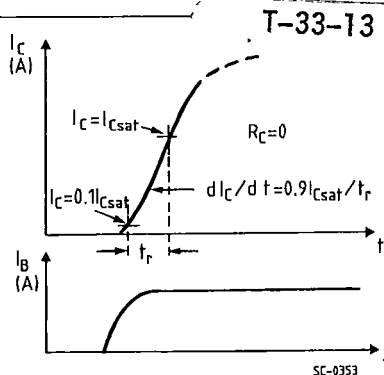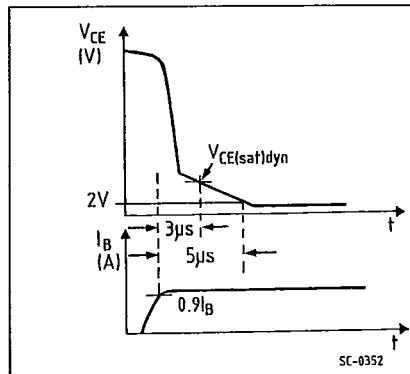


Turn-off Switching Waveforms (inductive load).

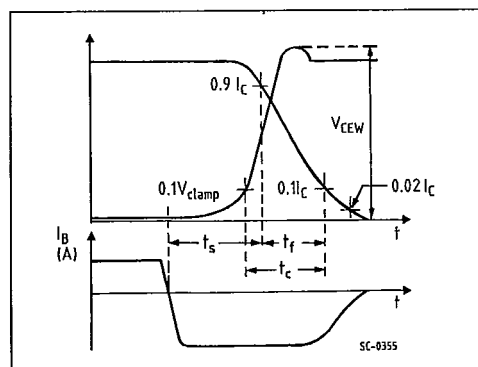

Forward Biased Safe Operating Areas.

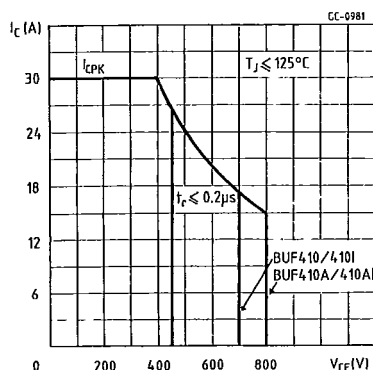

Reverse Biased Safe Operating Areas.

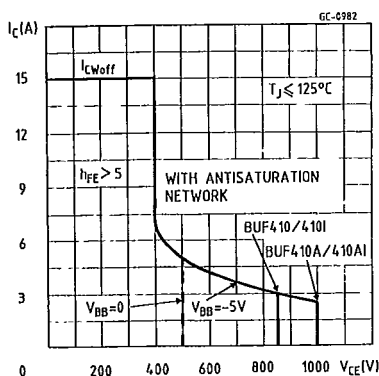

Storage Time Versus Pulse Time.

