
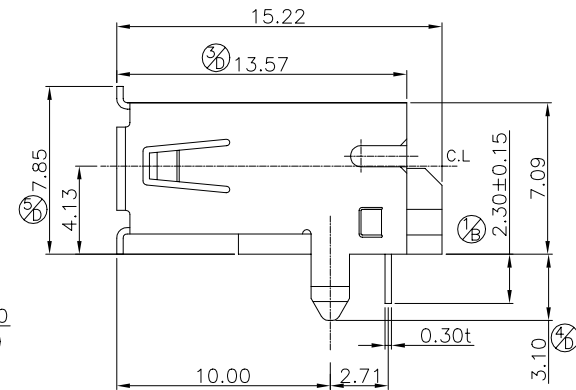
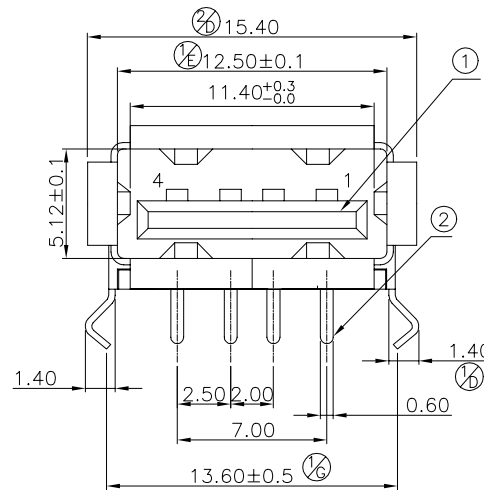


NOTE(I):


2537A-04 □□□-X
1

1. Selective plating

- 'G1T,-05u" select gold in contact/
Min. 100u" tin in solder area
'G2T,-Gold flash in contact area/
Min. 100u" tin in solder area
'G3T,-10u" select gold in contact/
Min. 100u" tin in solder area
'G4T,-15u" select gold in contact/
Min. 100u" tin in solder area
'G5T,-30u" select gold in contact/
Min. 100u" tin in solder area
'G6T,-50u" select gold in contact/
Min. 100u" tin in solder area

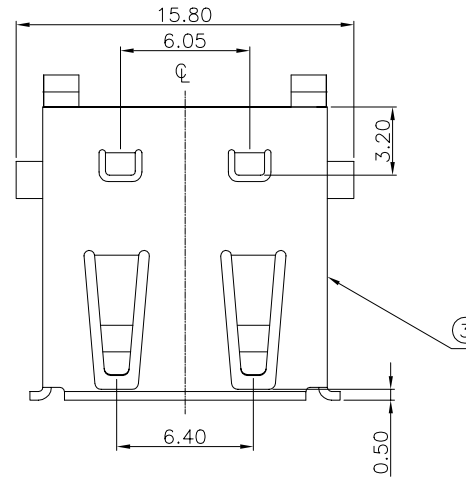

Recommended P.C.B Layout (Component Side)

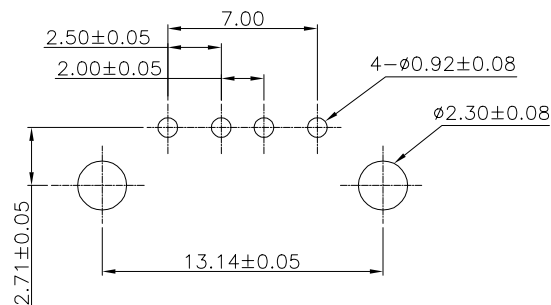

⊗	SUYIN P/NO.	鐵殼	⊗
	2537A-04GXT	亮錫	
	2537A-04GXT-D	鍍	

3	SHELL	Pho.Bronze	—	Tin Plated
2	TERMINAL	Pho.Bronze	—	Selective Gold/Tin
1	HOUSING	NY-6T	BLACK	UL 94V-0
NO. DESCRIPTION		MATERIAL	COLOR	REMARK

SUYIN
CONNECTOR

CUSTOMER COPY TITLE: USB CONNECTOR R/A DIP TYPE, Series A.

	G		G1:13.60->13.60±0.5			Angle	±2°	DRAW	王淑嫻	00/06/13	PART NO.	
	F		F1: 霧錫->亮錫	余強	李儒平	30 ~	±0.50	DESIGN	葉聰富	00/06/13	PART NO. (OLD)	2537A-04GXT-X
	E	02/02/27	增加標注尺寸	李碧華	宋權哲	10 ~ 30	±0.30	CHECK	葉聰富	00/06/13	DRAWING NO.	2537A-04GXT-X
	D	01/07/10	CHANGE DIMENSION	李儒平	宋權哲	~ 10	±0.15	APPRO.	孫一翔	00/06/13	SCALE	4:1
ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		UNIT	mm	A4		