

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1120005033

Status:

Active

Description:

BradCommunications™ Direct-Link™ PCIE-ETHIO Ethernet card for EtherNet/IP Scanner/Adapter, PCI Express 1x bus, RoHS compliant

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	Network Interface
Series	112000
Approvals	CE
Communication Speed	10 / 100 Mbaud (Auto)
Mounting Style	N/A
Product Name	Direct-Link®
Protocol	EtherNet/IP
Type	PC Card
Physical	
Channels	1
Interface	Ethernet
Network Connection Type	Ethernet: RJ45
Packaging Type	Carton
Processor	AMD SC520
Temperature Range - Operating	0°C to +65°C
Electrical	
Current - Maximum Input	5.5W
EMC	EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2
Supply Voltage	N/A
Material Info	
Old Part Number	DRL-EIP-PCIE
Reference - Drawing Numbers	
Sales Drawing	SD-112000-5033

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

112000Series

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



27 Jan. 10
DW2008254

BradCommunications™ applicomIO® Ethernet network interface cards provide powerful and reliable data acquisition for PC-based control and visualization applications.

Features

- **New! Support of PCI Express 1x form factor**
- **Protocols:**
 - **EtherNet/IP Master/Scanner**
 - **EtherNet/IP Adapter**
- **Reliable solution based on embedded protocol technology for powerful data throughput**
- **Single-time development of API for whatever fieldbus used**
- **“User-friendly” engineering tools for configuration and diagnostics**
- **Remote connection through Ethernet port (for embedded system platform)**
- **Application watchdog**
- **Automatic I/O mapping for easy configuration**
- **I/O exchange up to 14 Kbytes**

Typical Application

- **PC-Based Control**
- **Robotic application**
- **Panel PC visualization system**

Supported OS

Standard package

- **Windows 32-bit (XP, 2000, 2003 Server), VenturCom RTX**

Free Download


- **Windows XP Embedded, QNX, VxWorks, Linux, Phar Lap ETS, DOS**

applicomIO® PCU-ETHIO

Best Choice for controlling I/O over EtherNet/IP



PCI 3.3/5V
PCI Express



Overview

Some of the world's most demanding high-speed control and automation applications run on standard PCs using BradCommunications™ applicomIO® fieldbus interface cards. Dedicated DCS and PLC systems have been eliminated in favor of open platforms running PC-based control systems.

The benefits include:

- Reduced material costs
- Reduced development times
- More flexible and customizable systems
- Reduced field-support costs

applicomIO products are designed so industrial applications can be designed independently of the fieldbus used. **OEMs, system integrators and end-users** can take advantage of developing standard control applications as well as selecting the fieldbus connectivity required from the applicomIO product range.

applicomIO products consist of a fieldbus card and engineering tools which quickly and easily setup communication. EVERYTHING is included for a successful implementation at a lower cost.

applicomIO provides connectivity support for all popular fieldbuses including **EtherNet/IP, PROFINET IO, Modbus TCP, PROFIBUS, DeviceNet and CANopen**. Our cards are developed in compliance with the technical specifications of industrial organizations and comply with the applicable industrial standards. applicomIO supports up to 8 cards in a single PC and can run on various operating systems including Windows 32-bits, Linux as well as real-time OS such as VxWorks, QNX, and VenturCom RTX.

Particularly, the applicomIO® **PCU-ETHIO** network interface card provides high-speed deterministic communication to exchange data with industrial devices through **EtherNet/IP messaging**. The built-in processor handles all the protocol management to offer reliable and outstanding performance.

The software package includes a common development library for all fieldbuses supported. The process data is exchanged with the control application through a shared memory where inputs/outputs are automatically mapped. To monitor the communication between the card and the control application, the library includes a watchdog feature to automatically detect software blocking.

ARE YOU LOOKING FOR A REAL TURNKEY SOLUTION?

applicomIO® configuration software console provides a standardized and user-friendly environment for quick development of communication applications without the worry of knowing industrial communication protocols. The console saves time during the commissioning phase by offering features such as automatic device detection, user configuration management, diagnostic information, etc.

The product includes:

- Fieldbus interface card
- Engineering console for configuration and diagnostics
- Data Servers (OPC DA v3.0 & v2.05, Wonderware DAServer and FastDDE/SuiteLink)
- Development Libraries: Windows (DLL), NI (LabView), VenturCom (RTX)
- Static library for non-windows OS (VxWorks, QNX, Linux, etc)


BradCommunications™

applicomIO® PCU-ETHIO




Software tools

applicomIO® software tools enable fast integration of the fieldbus into your control application. No matter the fieldbus; the console remains the same.

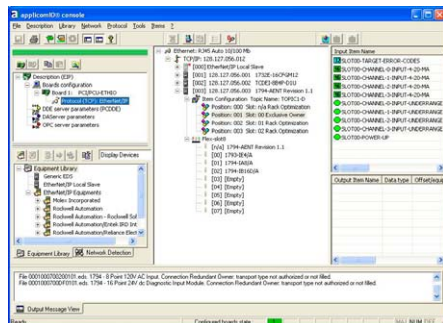

- Configuration Console -

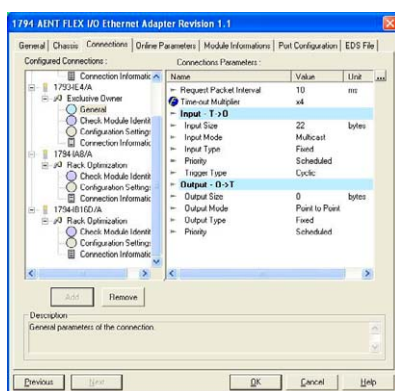

- Device Properties -



- Online Actions -



- Diagnostic and Test tools -

Hardware specifications

Bus interface	- PCI rev 2.2, 32-bit, 33 MHz, PCI Universal 3.3V/5V keying, PCI-X compatible - PCI Express 1x
Processor	AMD SC520 - 133 MHz
Memory	SDRAM: 16 Mbytes Flash: 4 Mbytes
Interrupt	Hardware Plug&Play
DPRAM Address	Hardware Plug&Play (32 Kbytes used per card)
Dimensions (L x W)	168mm x 107mm (6.61" x 4.21")
Consumption	5.5 W
Operating Temperature	0° C (32° F) ↔ +65° C (149° F)
Storage Temperature	-40° C (-40° F) ↔ +85° C (185° F)
Discrete Input	1x Opto-coupled
Discrete Output	1x "WatchDog" (dry contact)
EMC Compliance	EN55022 Class B, EN61000-6-2, EN61000-3-2, EN61000-3-3
RoHS Compliance	YES

1 Ethernet port

Port type	Ethernet port IEEE 802.3 for industrial applications
Connector type	BaseT (RJ45)
Speed	10/100 Mbps (Auto-negotiation)
LED indicators	4 LEDs - TX, RX, Link, 100 Mbps
Remote Access	Also usable for remote and diagnostic configuration

Protocols supported

Protocol	Specifications
EtherNet/IP	- EtherNet/IP - Explicit Msg and Implicit Msg (I/O Control) - I/O Master/Scanner and Slave according to EtherNet/IP specifications - Up to 128 simultaneous CIP based connections - EtherNet/IP Devices supported: Generic and Rockwell I/O through EDS files (FlexIO, CompactLogix, etc) - IP address settings configurable via the console or DHCP/BOOTP server - Client DNS Supported - ODVA Conformance Tested

Ordering information

Part Number	SAP	Product description
DRL-EIP-PCU	1120005030	BradCommunications™ Direct-Link™ PCU-ETHIO Ethernet card for EtherNet/IP Scanner/Adapter , PCI 3.3/ 5V
DRL-EIP-PCIE	1120005033	BradCommunications™ Direct-Link™ PCU-ETHIO Ethernet card for EtherNet/IP Scanner/Adapter , PCI Express 1x

Also available Modbus TCP and PROFINET IO network interface cards.