

# User Programmable Micro-Power Voltage Detectors

## General Description

The RT9801 is a micro-power voltage detector supervising the power supply voltage level for microprocessors ( $\mu$ P) or digital systems. It provides user programmable threshold levels with 0.1V step ranging from 1.5V to 5V, which covers most digital applications. It features low supply current of 3 $\mu$ A. Selection of  $V_{TH}$  is easily achieved through 3 pins connected to GND, VDD or floating for different threshold voltage settings. Two versions of threshold voltages, 1.5V ~ 4V and 2.5V ~ 5V, which are programmed in factory are offered by customer demands.

The RT9801 performs supervisory function by sending out a reset signal whenever the VDD voltage falls below a preset threshold level. This reset signal will last the whole period before VDD recovering. Reset signal will release after VDD is recovered and lasts for the whole period of Reset Active Time-out period.

RT9801 is N-channel, open-drain output and provided in SOT-26 package.

## Ordering Information

RT9801□□□	Package Type E : SOT-26
	Operating temperature range C: Commercial standard
	Reset Threshold A : 2.5V~5V
	B : 1.5V~4V

## Marking Information

Part Number	Marking
RT9801ACE	1J
RT9801BCE	1K


## Features

- User Programmable Threshold 1.5V to 5V in 0.1V Step with  $\pm 3\%$  Accuracy
- Low Supply Current 3 $\mu$ A
- Quick Reset within 20 $\mu$ S
- Built-in Recovery Delay 200mS
- Low Functional Supply Voltage 0.9V
- Small SOT-26 Package


## Applications

- Computers
- Controllers
- Intelligent Instruments
- Critical  $\mu$ P and  $\mu$ C Power Monitoring
- Portable/Battery-Powered Equipment

## Pin Configurations

Part Number	Pin Configurations
RT9801□CE (Plastic SOT-26)	 <p>TOP VIEW</p> <p>1. VSET0 2. GND 3. RESET 4. VDD 5. VSET2 6. VSET1</p>

## Typical Application Circuit

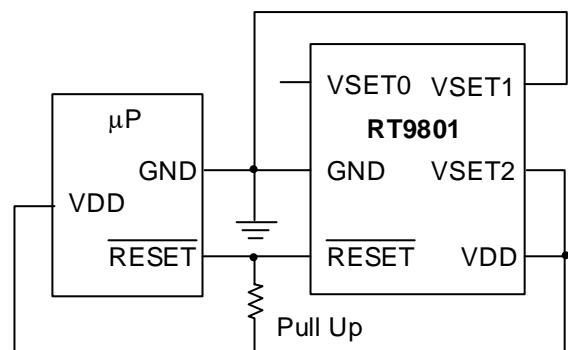


RT9801B  $V_{TH} = 2.5V$  in this example

## Pin Description

Pin Name	Pin Function
VSET0	Threshold Voltage Selection Pin 1
GND	Ground Pin
RESET	Reset Pulse Output, Negative Pulse
VDD	Power Pin
VSET1	Threshold Voltage Selection Pin 2
VSET2	Threshold Voltage Selection Pin 3

## Function Block Diagram

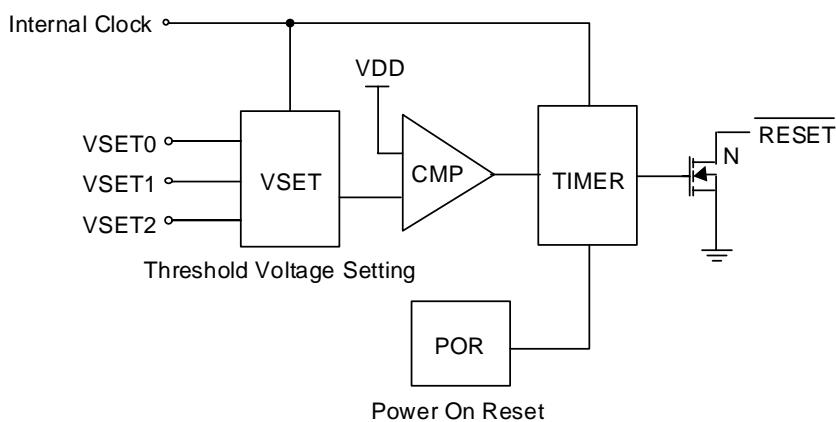

## Absolute Maximum Ratings

- Terminal Voltage (with Respect to GND)
 

VDD	-0.3V to 6.0V
All Other Inputs	-0.3V to VDD+0.3V
- Input Current, VDD 20mA
- Continuous Power Dissipation,  $P_D$  @  $T_A = 25^\circ C$ 

SOT-26	0.25W
--------	-------
- Operating Junction Temperature Range -40°C ~ 125°C
- Storage Temperature Range -65°C ~ 125°C
- Package Thermal Resistance
 

SOT-26, $\theta_{JA}$	250°C /W
-----------------------	----------
- Lead Temperature (Soldering, 5sec.) 260°C

## Electrical Characteristics

(VDD = 3V, unless specified)







Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Operating VDD ( $V_{OUT}$ ) Range	$V_{DD}$		0.9	--	6	V
Supply Current	$I_{DD}$	$V_{DD} = 1.5V \sim 3.5V, I_{OUT} = 0$	--	--	3	$\mu A$
		$V_{DD} = 3.5V \sim 5V, I_{OUT} = 0$	--	--	3.3	
Reset Threshold	$V_{TH}$	$T_A = 27^\circ C$	--	Note1	--	V
Threshold Voltage Accuracy	$\Delta V_{TH}$	$T_A = 27^\circ C$	--	--	3	%
VCC Drop to Reset Delay	$t_{RD}$	Drop = -125mV	--	--	20	$\mu S$
Reset Active Time Out Period	$t_{RP}$	$V_{DD} \geq 1.02 \times V_{TH}$ , Programmable	--	200	--	mS
VSET Pin Input Threshold	$V_{IL}$	$T_A = 27^\circ C$	--	0.15 $V_{DD}$	--	V
	$V_{IH}$	$T_A = 27^\circ C$	--	0.85 $V_{DD}$	--	
RESET Output Voltage	$V_{OL}$	$V_{DD} < V_{TH}, I_{SINK} = 3.5mA$	--	0.4	--	V







## Note 1: Pin Conditions for Programmable Threshold Voltage Setting







RT9801A	RT9801B	Vset0 input	Vset1 input	Vset2 input
5	4	V <sub>DD</sub>	V <sub>DD</sub>	V <sub>DD</sub>
4.9	3.9	V <sub>DD</sub>	V <sub>DD</sub>	floating
4.8	3.8	V <sub>DD</sub>	V <sub>DD</sub>	GND
4.7	3.7	V <sub>DD</sub>	floating	V <sub>DD</sub>
4.6	3.6	V <sub>DD</sub>	floating	floating
4.5	3.5	V <sub>DD</sub>	floating	GND
4.4	3.4	V <sub>DD</sub>	GND	V <sub>DD</sub>
4.3	3.3	V <sub>DD</sub>	GND	floating
4.2	3.2	V <sub>DD</sub>	GND	GND
4.1	3.1	floating	V <sub>DD</sub>	V <sub>DD</sub>
4	3	floating	V <sub>DD</sub>	floating
3.9	2.9	floating	V <sub>DD</sub>	GND
3.8	2.8	floating	floating	V <sub>DD</sub>
3.7	2.7	floating	floating	floating
3.6	2.6	floating	floating	GND
3.5	2.5	floating	GND	V <sub>DD</sub>
3.4	2.4	floating	GND	floating
3.3	2.3	floating	GND	GND
3.2	2.2	GND	V <sub>DD</sub>	V <sub>DD</sub>
3.1	2.1	GND	V <sub>DD</sub>	floating
3	2	GND	V <sub>DD</sub>	GND
2.9	1.9	GND	floating	V <sub>DD</sub>
2.8	1.8	GND	floating	floating
2.7	1.7	GND	floating	GND
2.6	1.6	GND	GND	V <sub>DD</sub>
2.5	1.5	GND	GND	floating







V<sub>DD</sub>: bond to V<sub>DD</sub>; 0: bond to GND; f: no bonding

## Typical Operating Characteristics

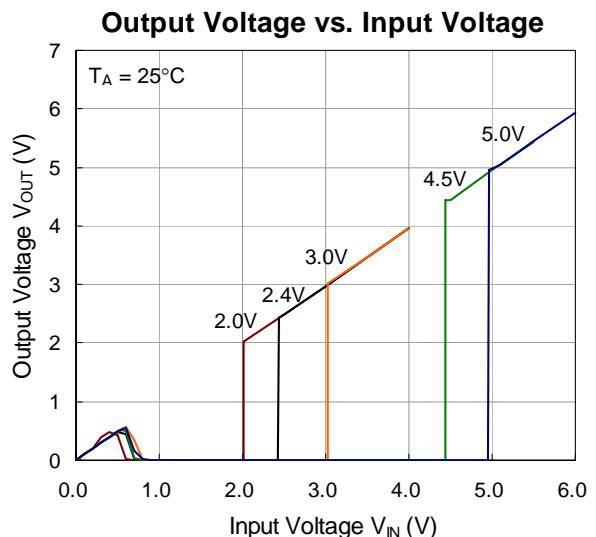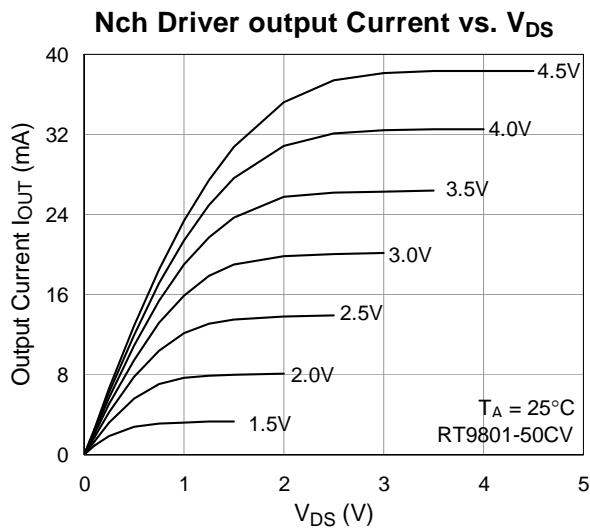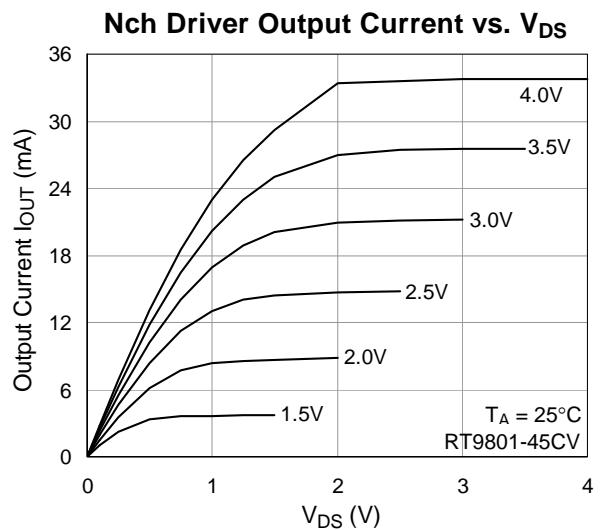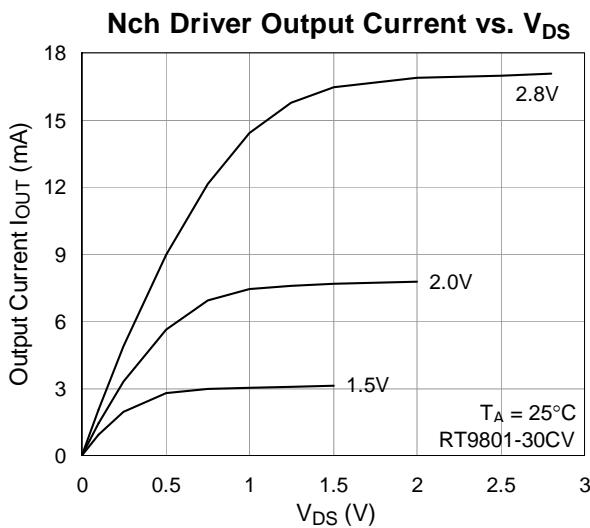
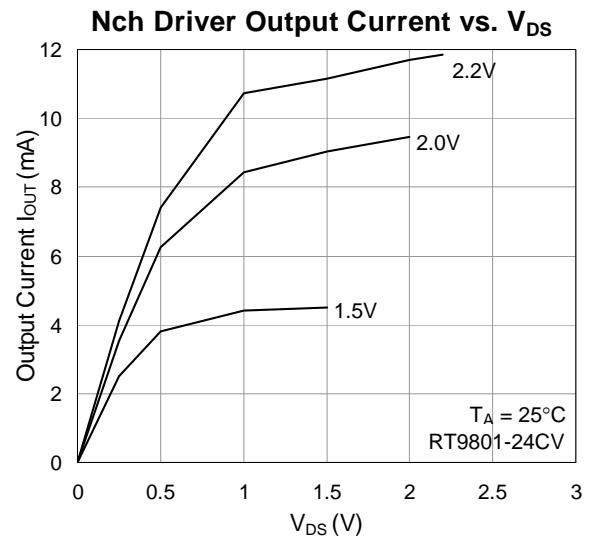
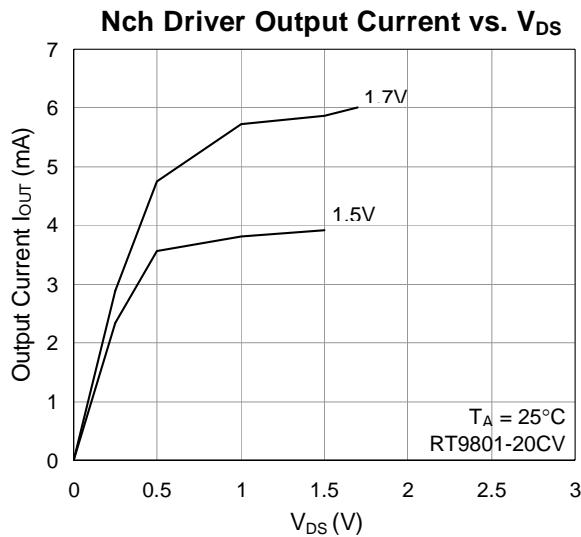


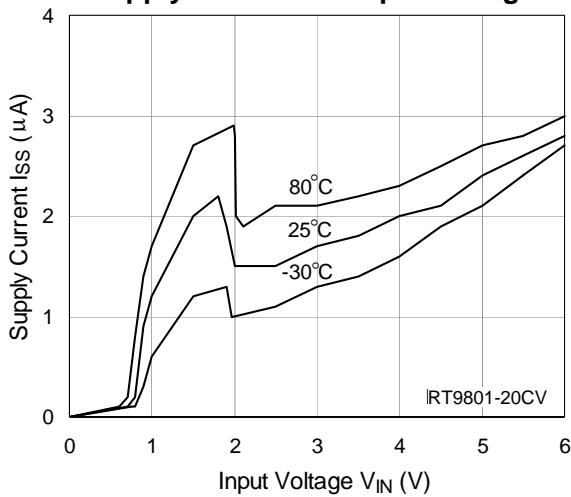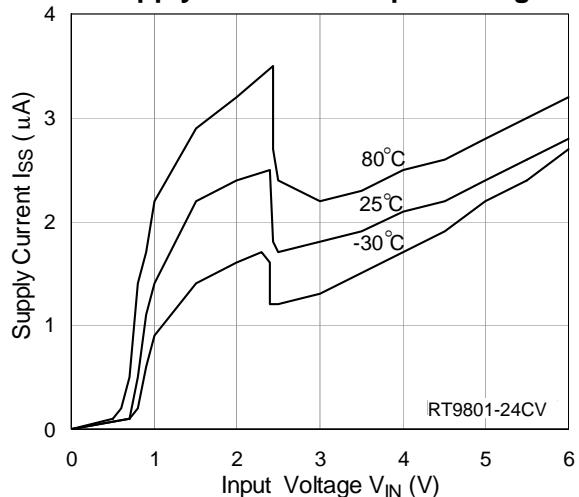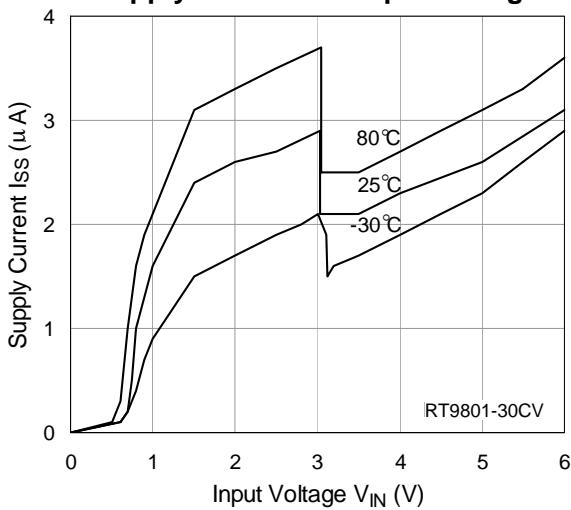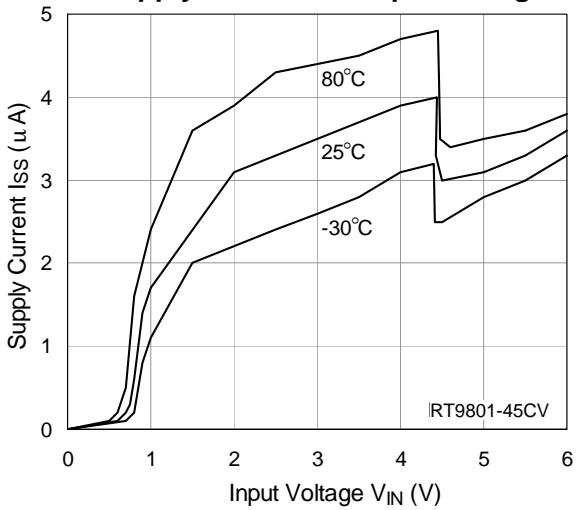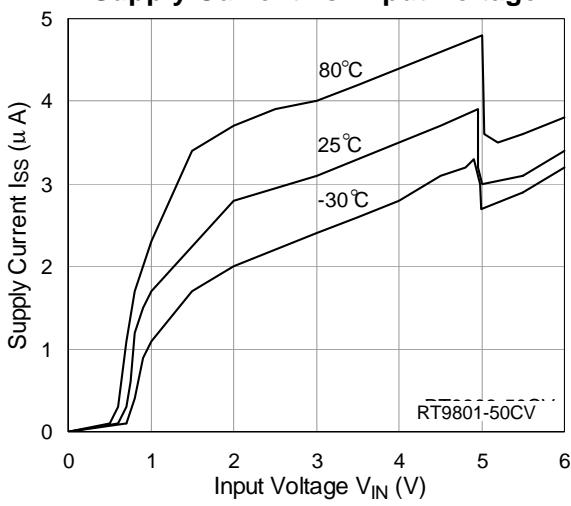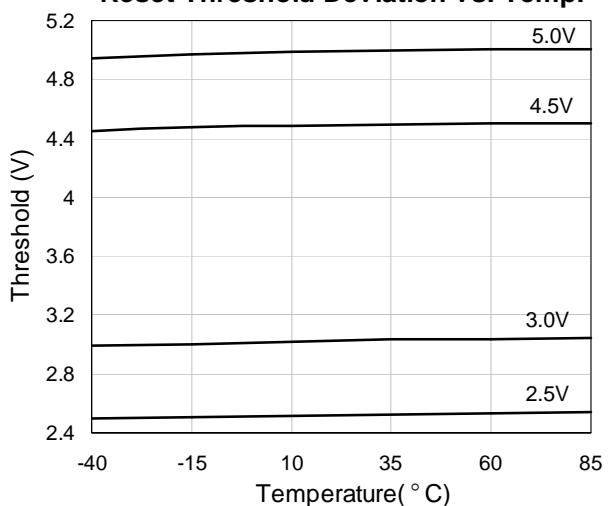**Supply Current vs. Input Voltage****Supply Current vs. Input Voltage****Supply Current vs. Input Voltage****Supply Current vs. Input Voltage****Supply Current vs. Input Voltage****Reset Threshold Deviation vs. Temp.**

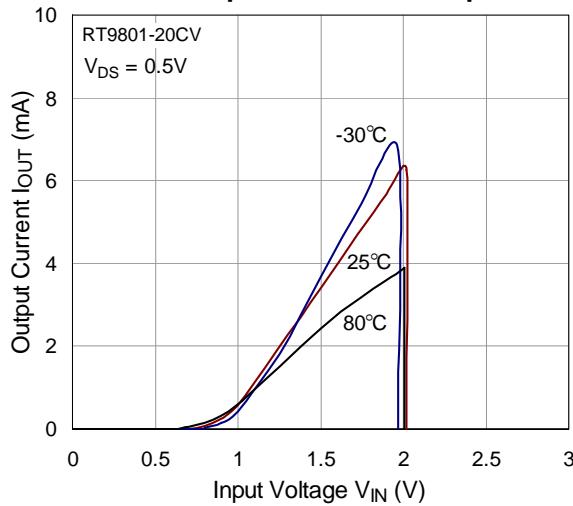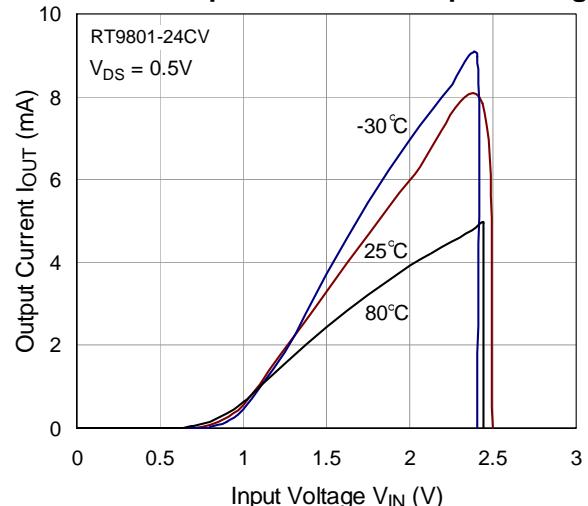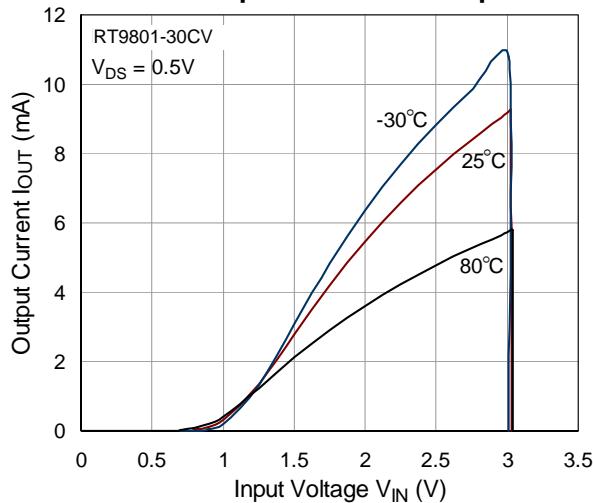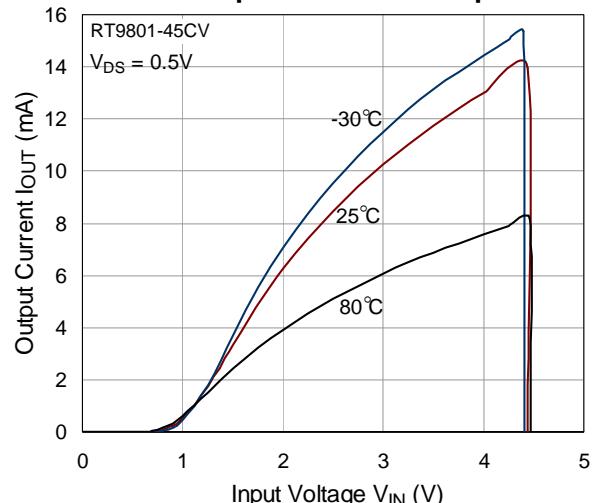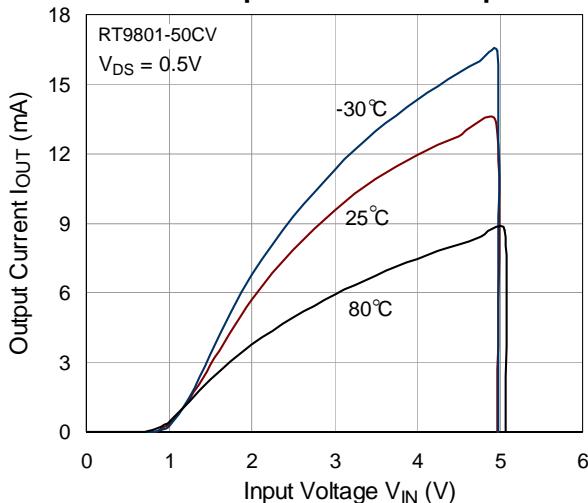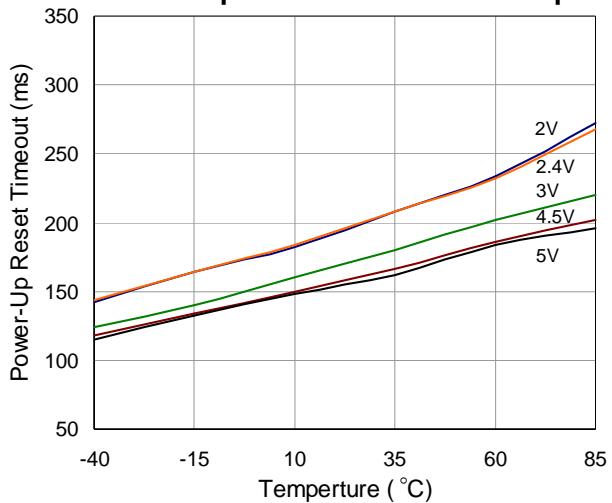**Nch Driver Output Current vs. Input Voltage****Nch Driver Output Current vs. Input Voltage****Nch Driver Output Current vs. Input Voltage****Nch Driver Output Current vs. Input Voltage****Nch Driver Output Current vs. Input Voltage****Power-Up reset Timeout vs. Temp.**

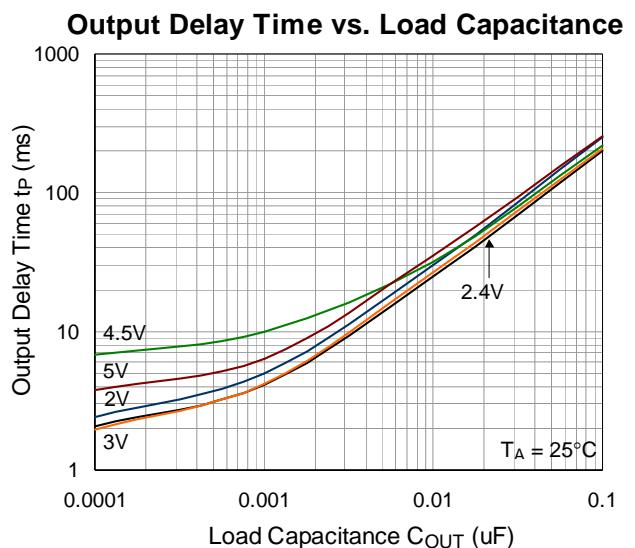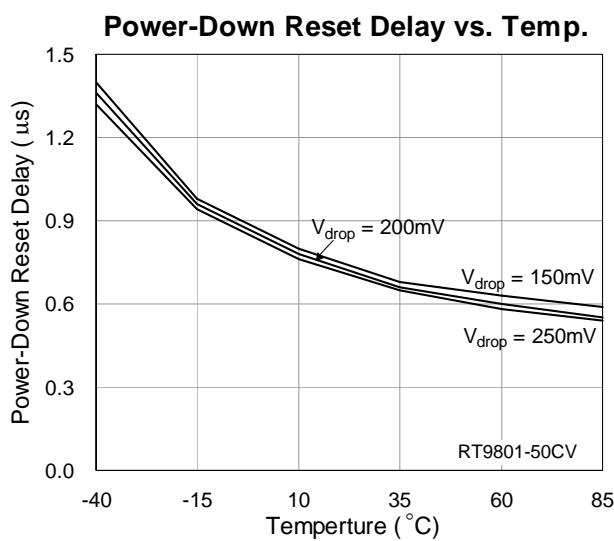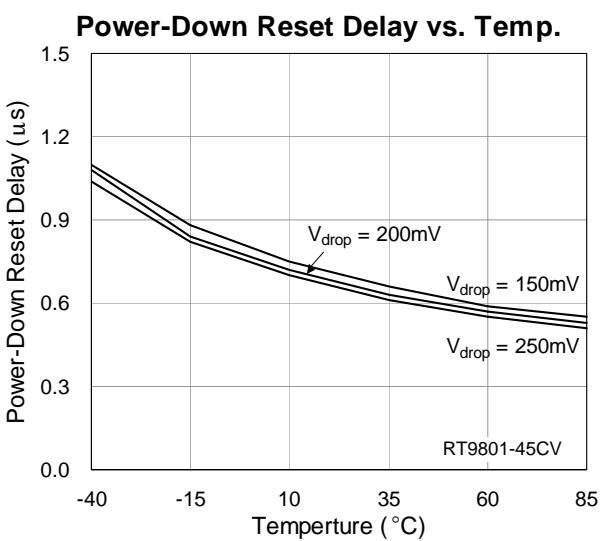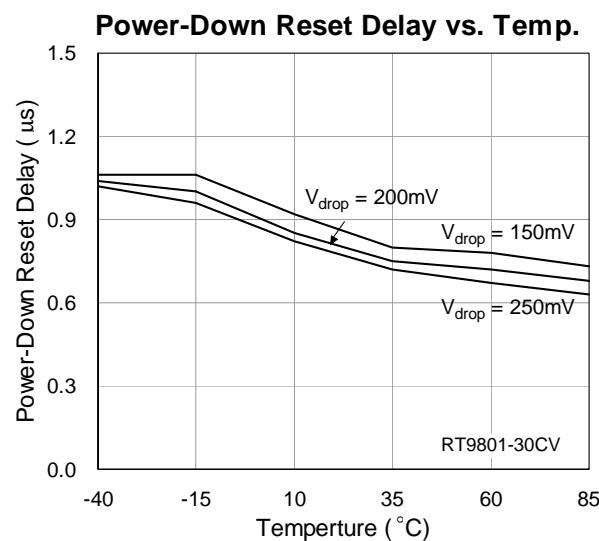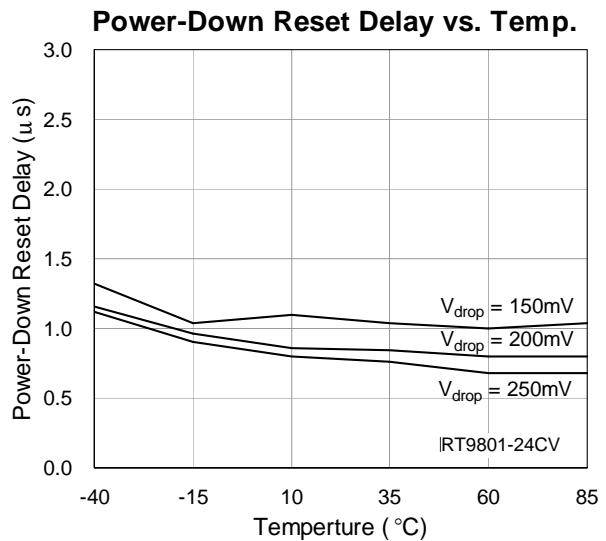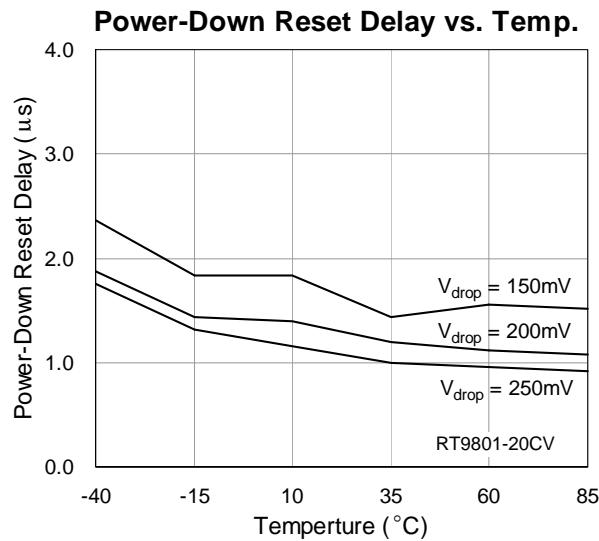

## Package Information

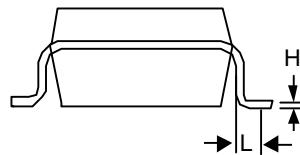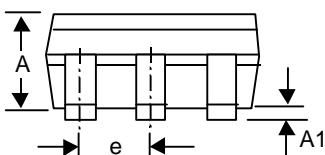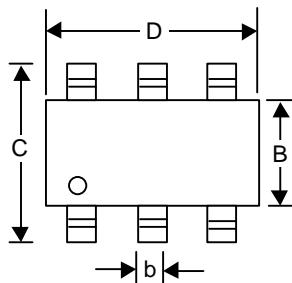

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.889	1.295	0.035	0.051
A1	--	0.152	--	0.006
B	1.397	1.803	0.055	0.071
b	0.356	0.559	0.014	0.022
C	2.591	2.997	0.102	0.118
D	2.692	3.099	0.106	0.122
e	0.838	1.041	0.033	0.041
H	0.102	0.254	0.004	0.010
L	0.356	0.610	0.014	0.024

SOT- 26 Surface Mount Package

**RICHTEK TECHNOLOGY CORP.**

Headquarter

5F, No. 20, Taiyuen Street, Chupei City  
Hsinchu, Taiwan, R.O.C.

Tel: (8863)5526789 Fax: (8863)5526611

**RICHTEK TECHNOLOGY CORP.**

Taipei Office (Marketing)

8F-1, No. 137, Lane 235, Paochiao Road, Hsintien City  
Taipei County, Taiwan, R.O.C.

Tel: (8862)89191466 Fax: (8862)89191465

Email: marketing@richtek.com