



DETAIL "A"
SCALE (8:1)

Recommended P.C.B Layout(Component Side)

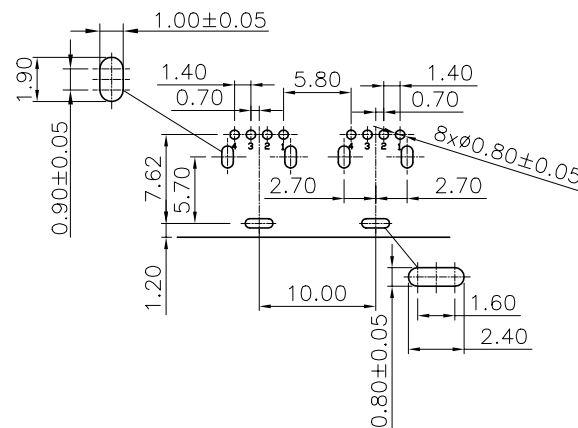

NOTE(I):

2553A-08□□□-G

- 1.Selective plating
'G1T,-G5U" select gold in contact/
Min 100u"tin in solder area
'G2T,-Gold flash in contact area/
Min 100u"tin in solder area
'G3T,-10u"select gold in contact/
Min 100u"tin in solder area
'G4T,-15u"select gold in contact/
Min 100u"tin in solder area
'G5T,-30u"select gold in contact/
Min 100u"tin in solder area

NOTE(II):

1.AK□M2553-08-G



S=G1T

U=G2T

R=G3T

Q=G4T

Q=G5T

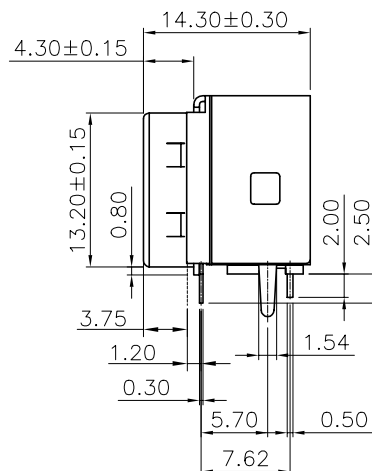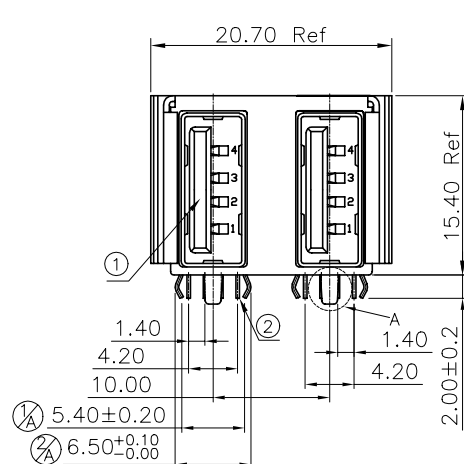

5	SHELL	COPPER C2680H	—	TIN
4	SHELL	COPPER C2680H	—	TIN
3	SHELL	SPCC	—	TIN
2	TERMINAL	Pho.Bronze	—	GOLD/TIN
1	HOUSING	LCP	BLACK	UL94V-0
NO,DESCRIPTION		MATERIAL	COLOR	REMARK

SUYIN
CONNECTOR

CUSTOMER COPY TITLE: Rear For USB A Series

						Angle	±2°	DRAW	王淑麗	01/07/28	PART NO.			
	A		A1:6.00±0.25->5.40±0.20 A2:6.70±0.15->6.50±0.10			30 ~	±0.50	DESIGN	王淑麗	01/07/28	PART NO. (OLD)	2553A-08GXT-G		
	0	01/08/03	NEW			10 ~ 30	±0.30	CHECK	宋權哲	01/07/28	DRAWING NO.	2553A-08GXT-G		
ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	~ 10	±0.15	APPRO.	宋權哲	01/07/28	SCALE	4:1	UNIT	mm
						GENERAL TOLERANCE UNLESS OTHERWISE NOTED								