

REF12Z/REF12D

1.26V MICROPOWER PRECISION REFERENCE

The REF12Z and REF12D are integrated circuits using the bandgap principle to provide a precise stable reference voltage of 1.26V. There are two package options available: REF12Z in a plastic 3-pin TO-92 and REF12D in a miniature surface mount package (MP8).

These references feature a recommended operating current of 90µA to 2.5mA which make them ideal for all low power and battery applications.

FEATURES

- Low Knee Current - typically 80 microamps
- Ideal for Battery Operation - 113 microwatts
- REF12Z - 3 lead TO-92 Plastic Package
- REF12D - Miniature Plastic Surface Mount Package (MP8)
- Tight Initial V_{REF} Tolerance $\pm 1\%$
- Low Temperature Coefficient
- Low Slope Resistance
- Low Cost
- Operation over Industrial Temperature Range

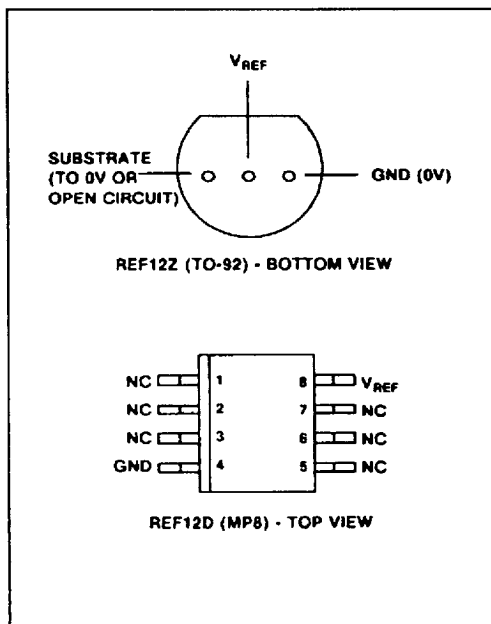


Fig. 1 Pin connection

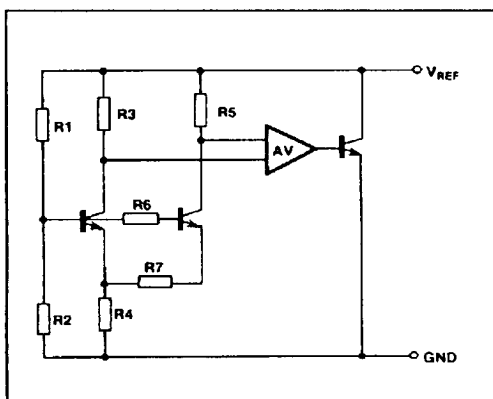


Fig. 2 Internal connections

ORDERING INFORMATION

Device Type	Operating Temperature	Package
REF12Z	-40°C to +85°C	TO-92
REF12D	-40°C to +85°C	MP8

ABSOLUTE MAXIMUM RATINGS

Reference current	2.5mA
Operating temperature range:	
REF12Z	-40 to +85°C
REF12D	-40 to +85°C
Storage temperature	-55 to +125°C
Storage temperature for a max. time of 10ns:	
within 1.59mm of the seating plane	300°C
within 0.80mm of the seating plane	265°C

ELECTRICAL CHARACTERISTICS

These characteristics are guaranteed over the following conditions (unless otherwise stated)

 $T_{amb} = 25^{\circ}\text{C}$, $C_s = 470\text{nF}$ (see Fig.3)

Characteristic	Symbol	Value			Units	Conditions
		Min.	Typ.	Max.		
Output voltage	V_{REF}	1.247	1.26	1.273	V	$I_{REF} = 150\mu\text{A}$ to 2.5mA Note 1
Slope resistance (Note 1)	R_{REF}		2.5	4.0	Ω	
Turn-on (knee) current	I_{ON}	0.09	80	90	μA	REF12Z } REF12D } Note 2 0.1Hz to 25kHz } $I_{REF} = 1.5\text{mA}$ } $I_{REF} = 1.5\text{mA}$
Recommended operating current range	I_{REF}			2.5	mA	
Temperature coefficient (Note 2)	$TC V_{REF}$		40	80	ppm/ $^{\circ}\text{C}$	
RMS noise voltage	E_N		30	80	ppm/ $^{\circ}\text{C}$	
Turn-on time	T_{ON}		1.0		$\mu\text{V}/\sqrt{\text{Hz}}$	
Turn-off time	T_{OFF}		0.4		ms	
Turn-on time	T_{ON}		15		ms	
Turn-off time	T_{OFF}		5		ms	
			110		ms	

NOTES

1. Slope resistance (R_{REF})

Slope resistance is defined as

$$R_{REF} = \frac{\text{Change in } V_{REF} \text{ over a specified current range}}{\text{The change in reference current}}$$


2. Reference voltage temperature coefficient ($TC V_{REF}$)

This is the normalised reference voltage change over temperature, divided by the change in temperature.

It is expressed in ppm/ $^{\circ}\text{C}$

$$TC V_{REF} = \frac{\Delta V_{REF} \times 10^6}{V_{REF} \times \Delta T} \text{ ppm}/^{\circ}\text{C}$$

 ΔT = temperature change in $^{\circ}\text{C}$ ΔV_{REF} = change in reference voltage over temperature change ΔT

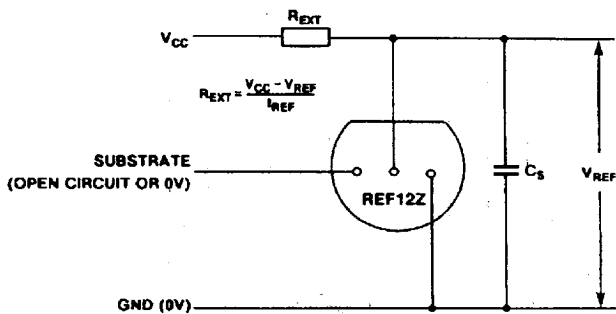

NOTE: In order to achieve optimum operation, a stabilising capacitor ($C_S \geq 470nF$) should be connected between V_{REF} and 0V as shown.

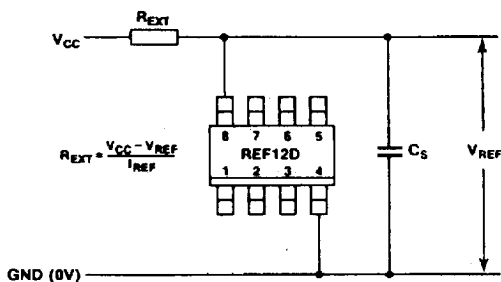


Fig.3 Connection diagram

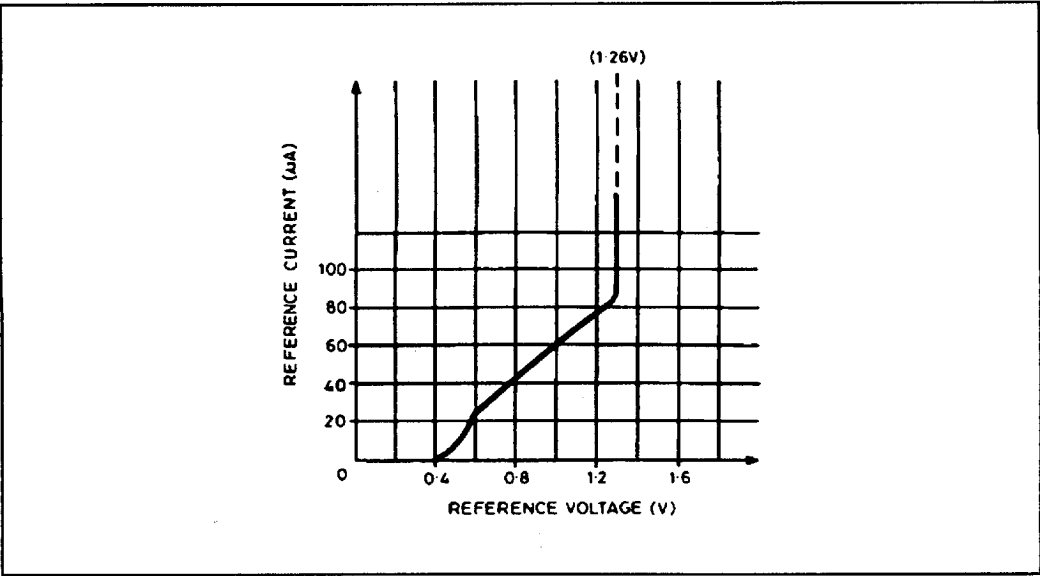


Fig.4 Typical reference characteristics

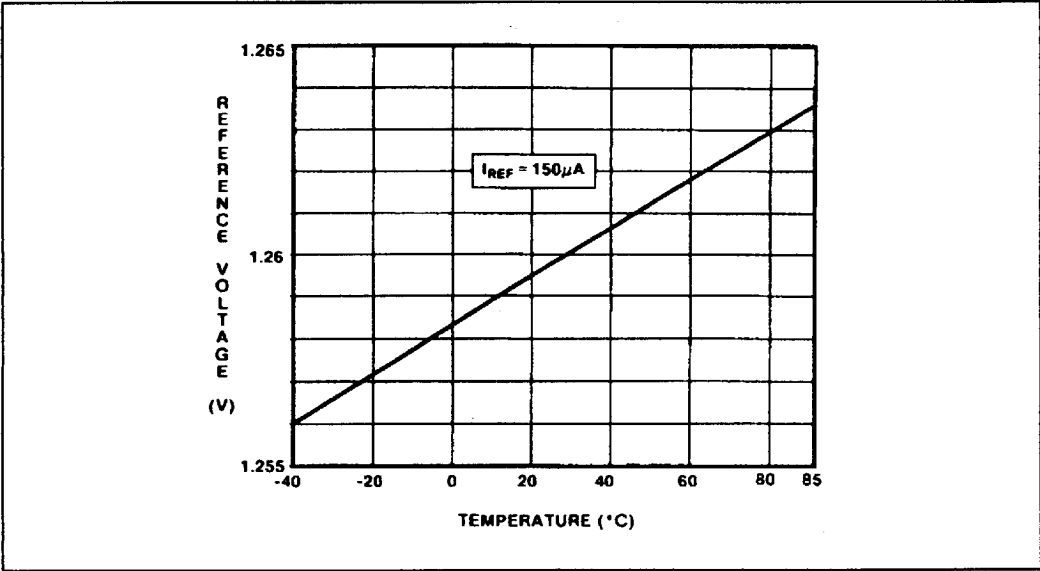
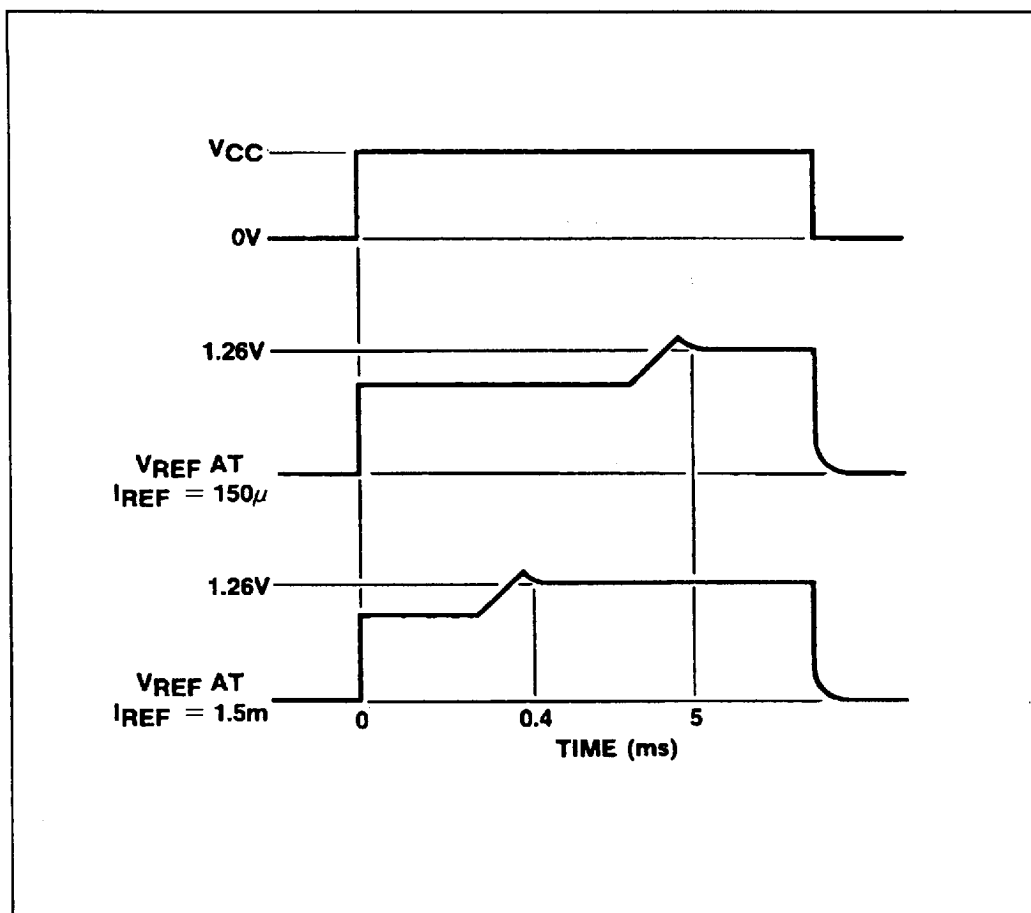
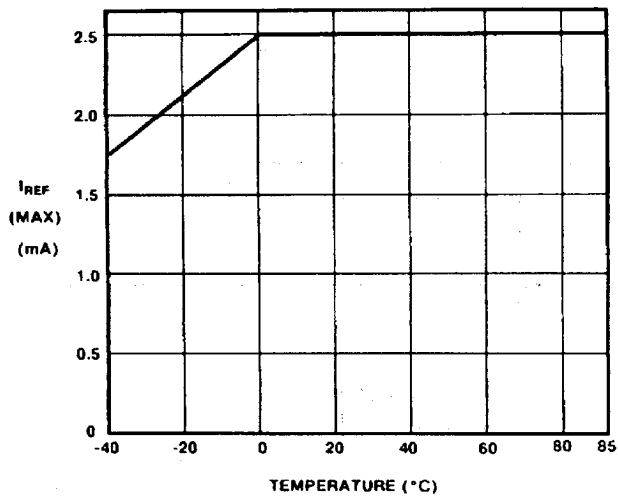


Fig.5 Typical temperature characteristic

*Fig.6 Typical response time*

*Fig. 7 Typical derating curve*