
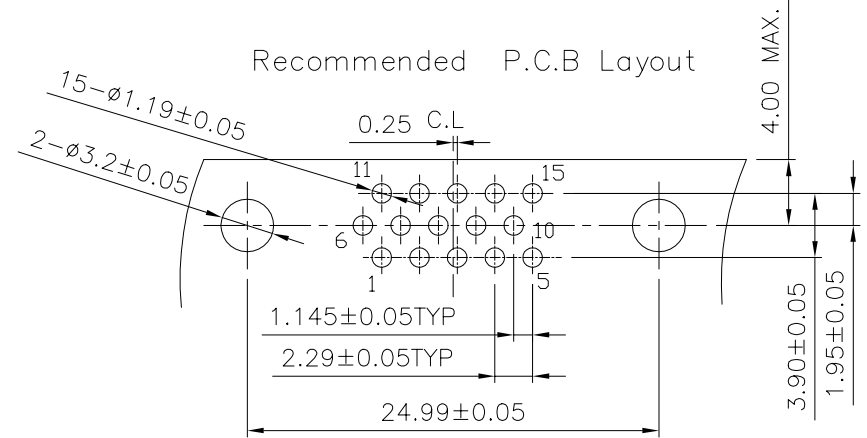
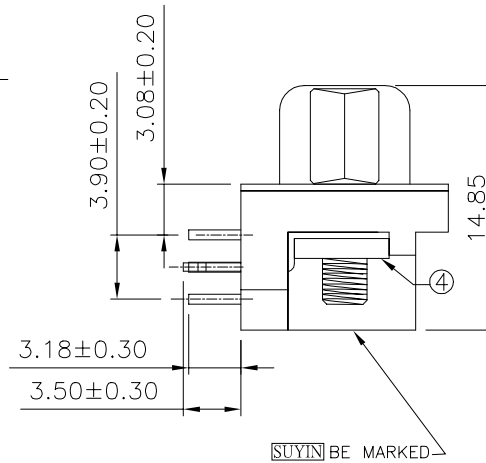
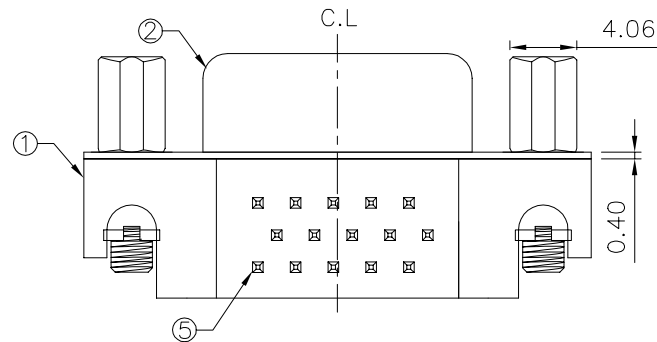


# 1:PC CONNECTOR

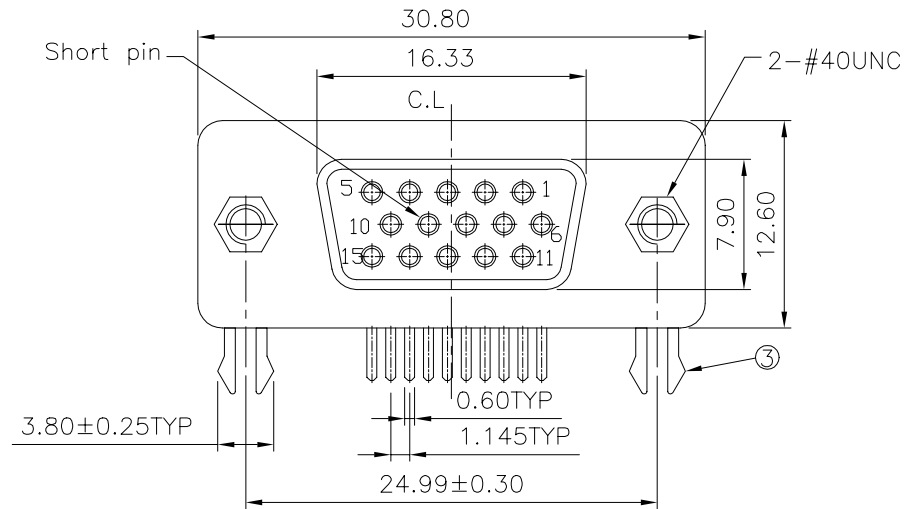

NOTE:  
070207FR015SX20CA

- 1.Selective plating  
S1-05u"Min.Gold in contact area/  
100u"Min.Tin in solder area.  
S2-Gold flash in contact area/  
100u"Min.Tin in solder area.  
S3-10u"Min.Gold in contact area/  
100u"Min.Tin in solder area.  
S4-15u"Min.Gold in contact area/  
100u"Min.Tin in solder area.  
S5-30u"Min.Gold in contact area/  
100u"Min.Tin in solder area.  
S6-50u"Min.Gold in contact area/  
100u"Min.Tin in solder area.

| NO. | DESCRIPTION | MATERIAL   | COLOR      | REMARK             |
|-----|-------------|------------|------------|--------------------|
| 5   | Terminal    | Pho.Bronze | —          | Selective Gold/Tin |
| 4   | Rivet       | Brass      | —          | Nickel Plated      |
| 3   | Fork        | Brass      | —          | Nickel Plated      |
| 2   | Shell       | SPCC       | —          | Nickel Plated      |
| 1   | Plastic     | PBT        | BLUE(661C) | UL94V-0            |

**SUYIN**  
CONNECTOR

|               |                                               |
|---------------|-----------------------------------------------|
| CUSTOMER COPY | TITLE: 15 PIN D-SUB CONNECTOR FEMALE R/A TYPE |
| PART NO.      | 070207FR015SX20CA                             |
| PART NO.(OLD) | —                                             |
| DRAWING NO.   | D 070207FR015SX20CA                           |
| SCALE         | 1:1                                           |
| UNIT          | mm                                            |
| A4            | ⑩                                             |

| ECN(DCN) NO. | REV | DATE | DESCRIPTION | CHANGE | APPRO. | GENERAL TOLERANCE UNLESS OTHERWISE NOTED |
|--------------|-----|------|-------------|--------|--------|------------------------------------------|
|              | 0   |      | NEW         |        |        |                                          |

| Angle   | ±2°   | DRAW   |
|---------|-------|--------|
| 30 ~    | ±0.50 |        |
| 10 ~ 30 | ±0.30 |        |
| ~ 10    | ±0.15 |        |
|         |       | CHECK  |
|         |       | APPRO. |